

# Quality Assurance Project Plan

*for*

## Benthic Monitoring 2017–2020

---

Massachusetts Water Resources Authority  
Report 2017-06



**Citation:**

Rutecki D, Nestler E, Hasevlat R. 2017. *Quality Assurance Project Plan for Benthic Monitoring 2017–2020*. Boston: Massachusetts Water Resources Authority. Report 2017-06. 92 p. plus Appendices.

**QUALITY ASSURANCE PROJECT PLAN**

*for*

**Benthic Monitoring: 2017–2020**

**MWRA Harbor and Outfall Monitoring Project  
Contract No. OP326B**

*Submitted to*

**Massachusetts Water Resources Authority  
Environmental Quality Department  
100 First Avenue  
Charlestown Navy Yard  
Boston, MA 02129  
(617) 242-6000**

*Prepared by*

**Deborah A. Rutecki  
Eric C. Nestler  
Robert C. Hasevlat**

*Submitted by*

**Normandeau Associates, Inc.  
25 Nashua Road  
Bedford, NH 03110**

**May 2017**

**Report No. 2017-06**

**A. PROJECT MANAGEMENT**

**VERSION 1**

**A1. TITLE AND APPROVALS**

**QUALITY ASSURANCE PROJECT PLAN**

*for*

**BENTHIC MONITORING 2017-2020**

**MWRA Harbor and Outfall Monitoring Project  
Contract No. OP326B**

*Prepared by*

**Normandeau Associates, Inc.**

**May 2017**

**Review and Approvals**

<u>Signature on file</u> Mr. Eric Nestler Normandeau Program Manager	<u>6/8/2017</u> Date
<u>Signature on file</u> Mr. Robert Hasevlat Normandeau Project QA Officer	<u>6/8/2017</u> Date
<u>Signature on file</u> Mr. Kenneth E. Keay MWRA Project Manager	<u>6/8/2017</u> Date
<u>Signature on file</u> Dr. Douglas Hersh MWRA EM&MS Database Manager	<u>6/8/2017</u> Date

## A2. TABLE OF CONTENTS

<b>A.</b>	<b>PROJECT MANAGEMENT .....</b>	<b>3</b>
A1.	TITLE AND APPROVALS .....	3
A2.	TABLE OF CONTENTS .....	4
A3.	DISTRIBUTION LIST.....	9
A4.	PROJECT AND TASK ORGANIZATION.....	10
A4.1	QAPP Introduction .....	10
A4.2	Project Organization .....	10
A5.	PROBLEM DEFINITION AND BACKGROUND.....	14
A5.1	Historical Background .....	14
A5.2	Regulatory Overview.....	15
A5.3	Scientific Perspective.....	16
A5.3.1	Objectives and Scope.....	17
A6.	PROJECT/TASK DESCRIPTION.....	18
A6.1	Boston Harbor Studies .....	18
A6.2	Outfall Studies .....	22
A6.2.1	Technical Overview .....	22
A6.2.2	Contingency Plan Thresholds .....	29
A6.3	Schedule of Activities and Deliverables .....	29
A7.	QUALITY OBJECTIVES AND CRITERIA.....	32
A7.1	Field Activities.....	32
A7.1.1	Navigation.....	32
A7.1.2	Grab Sampling .....	32
A7.1.3	Sediment Profile Imagery .....	33
A7.1.4	Hard-bottom ROV Survey .....	33
A7.2	Laboratory Activities .....	33
A7.2.1	Infaunal Analysis .....	33
A7.2.2	Sediment Profile Image Analysis.....	33
A7.2.3	Hard-bottom Video Analysis .....	33
A8.	SPECIAL TRAINING/CERTIFICATIONS .....	33
A8.1	Special Training.....	33
A8.2	Certifications.....	34
A9.	DOCUMENTS AND RECORDS .....	34
A9.1	Documentation.....	34
A9.2	Field Records .....	34
A9.3	Laboratory Records and Deliverables.....	35
A9.4	Reports and Data Submissions.....	35
A9.4.1	Quality Assurance Project Plan (QAPP).....	36
A9.4.2	Survey Plans.....	36
A9.4.3	Survey Summaries .....	37
A9.4.4	Survey Reports.....	37
A9.4.5	Reference Collection Status Report .....	37
A9.4.6	Sample Analysis Data Submissions .....	38
A9.4.7	Review of MWRA Generated Data Reports .....	38
A9.4.8	Summary Reports.....	38
A9.4.8.1	Outfall Benthic Report .....	38
A9.4.8.1.1	Statistical Analyses for Sedimentary and Chemistry Data.....	39
A9.4.8.1.2	SPI Analyses .....	39

	A9.4.8.1.3	Infaunal Data Analyses .....	39
	A9.4.8.1.4	Hard-bottom Data Analyses .....	40
	A9.4.8.2	Harbor Benthic Report .....	40
	A9.5	Project files .....	40
<b>B.</b>		<b>DATA GENERATION AND ACQUISITION .....</b>	<b>42</b>
B1.		SAMPLING PROCESS DESIGN (EXPERIMENTAL DESIGN).....	42
B2.		SAMPLING METHODS .....	42
	B2.1	Navigation.....	42
	B2.2	Benthic Sample Collection/Shipboard Processing.....	43
	B2.2.1	Grab Sample Collection .....	48
	B2.2.2	Grab Sample Shipboard Processing.....	49
	B2.2.3	Sediment Profile Image Collection .....	50
	B2.2.4	Hard-bottom Video Collection.....	50
B3.		SAMPLE HANDLING AND CUSTODY.....	52
	B3.1	Sample Handling.....	52
	B3.2	Sample Custody .....	52
	B3.2.1	Sample Tracking .....	52
	B3.2.2	Sample Custody .....	57
	B3.2.3	Sample Archival Policies .....	58
B4.		ANALYTICAL METHODS .....	58
	B4.1	Soft-bottom Infaunal Analysis.....	58
	B4.2	Sediment Profile Image Analysis.....	60
	B4.3	Hard-bottom Analog and Digital Video .....	60
B5.		QUALITY CONTROL .....	62
	B5.1	Sampling .....	62
	B5.1.1	Navigation.....	62
	B5.1.2	Grab Sampling .....	62
	B5.1.2.1	Benthic Infauna .....	63
	B5.1.2.2	Sediment.....	63
	B5.1.3	Sediment Profile Imagery .....	64
	B5.1.4	Hard-bottom ROV Survey .....	64
	B5.2	Laboratory Activities .....	65
	B5.2.1	Infaunal Analysis .....	65
	B5.2.2	Sediment Profile Image Analysis.....	66
	B5.2.3	Hard-bottom Video Analysis .....	66
	B5.2.4	Sediment Chemistry.....	67
	B5.2.5	Physicochemical and Microbiological Parameters .....	67
B6.		INSTRUMENT/EQUIPMENT TESTING, INSPECTION, AND MAINTENANCE .....	67
	B6.1	Laboratory Equipment .....	67
	B6.2	Sediment Profile Image Analysis System.....	67
	B6.3	Hard-bottom ROV Video.....	68
B7.		INSTRUMENT/EQUIPMENT CALIBRATION AND FREQUENCY.....	68
	B7.1	Navigation Equipment .....	68
	B7.2	Laboratory Equipment .....	68
B8.		INSPECTION/ACCEPTANCE OF SUPPLIES AND CONSUMABLES .....	68
B9.		NON-DIRECT MEASUREMENTS .....	69
B10.		DATA MANAGEMENT .....	69
	B10.1	Data Custody.....	69
	B10.2	Laboratory Data and Data Reduction .....	69
	B10.2.1	Infaunal Analysis .....	70

B10.2.2	Sediment Chemistry Analysis.....	70
B10.2.3	SPI Analysis.....	70
B10.2.4	Hard-bottom Analysis.....	70
B10.3	Data Set Structure.....	70
B10.4	Project Database Codes.....	70
B10.5	Data Submittal to MWRA.....	72
B10.6	Data Report Quality Control Checks.....	72
<b>C.</b>	<b>ASSESSMENT AND OVERSIGHT.....</b>	<b>78</b>
C1.	Assessment and Response Actions.....	78
C1.1	Assessments.....	78
C1.1.1	Field Sampling Readiness Reviews.....	78
C1.1.2	Field Sampling Technical System Audit.....	78
C1.1.3	Fixed Laboratory Technical System Audits.....	78
C1.1.4	Performance Evaluation Sample Assessment.....	83
C1.1.5	Data Technical System Audits.....	83
C1.2	Assessment Findings and Corrective Action Responses.....	83
C1.2.1	Field Corrective Action.....	84
C1.2.2	Laboratory Corrective Action.....	84
C1.2.3	Corrective Action during Data Validation and Data Assessment.....	85
C2.	REPORTS TO MANAGEMENT.....	85
<b>D.</b>	<b>DATA VALIDATION AND USABILITY.....</b>	<b>86</b>
D1.	DATA REVIEW, VERIFICATION, AND VALIDATION.....	86
D1.1	Field Data.....	86
D1.2	Laboratory Data.....	86
D1.3	Data Management.....	86
D2.	VALIDATION AND VERIFICATION METHODS.....	86
D2.1	Field Data.....	86
D2.2	Laboratory Data.....	86
D2.3	Data Management.....	87
D2.4	Project Deliverables.....	87
D3.	RECONCILIATION WITH USER REQUIREMENTS.....	87
D3.1	Comparison to Measurement Criteria.....	88
D3.1.1	Precision and Accuracy Assessment.....	88
D3.1.2	Completeness Assessment.....	88
D3.1.3	Representativeness.....	88
D3.2	Overall Assessment of Environmental Data.....	88
<b>E.</b>	<b>REFERENCES.....</b>	<b>90</b>

## LIST OF FIGURES

Figure 1. Locations of Boston Harbor grab and reconnaissance stations. ....	21
Figure 2. Locations of nearfield soft-bottom sampling stations. ....	24
Figure 3. Locations of farfield soft-bottom sampling stations. ....	25
Figure 4. Locations of nearfield sediment profile imaging stations. ....	26
Figure 5. Locations of hard-bottom benthic monitoring stations. ....	28
Figure 6. Example of an Infaunal Sample Label. ....	52
Figure 7. Example of a Station Log Form. ....	53
Figure 8. Example of a Chain-of-Custody Form. ....	54
Figure 9. Example of DLS LIMS Sediment Chemistry Sample Labels. ....	56

## LIST OF TABLES

Table 1. Personnel Responsibilities and Contact Information for Benthic Monitoring Program. ....	12
Table 2. Target Locations for Harbor Traditional and Reconnaissance Stations. ....	19
Table 3. Target Locations for Outfall Survey Stations. ....	23
Table 4. Target Locations for Hard-bottom Survey Transects. ....	27
Table 5. Contingency Plan Thresholds Established by MWRA. ....	29
Table 6. Overview of Harbor and Outfall Surveys and Associated Deliverables. ....	30
Table 7. Schedule of Benthic Monitoring Data and Reporting Deliverables. ....	31
Table 8. Number of Stations to be Visited and Samples per Station to be Collected each Year by Survey and Sample Type. ....	44
Table 9. Processing and Storage of Field Samples taken on Boston Harbor Benthic Surveys. ....	45
Table 10. Field Processing and Storage of Samples taken on Outfall Benthic Surveys. ....	46
Table 11. Values used to convert Grab Penetration Depth to Sediment Volume. ....	49
Table 12. DLS LIMS "test codes" and sample containers for each sediment chemistry sample type. ....	57
Table 13. Benthic Survey Sample Analyses. ....	59
Table 14. Parameters Measured from Sediment Profile Images. ....	61
Table 15. Supplies, Acceptance Criteria, and Responsibility for Critical Field Supplies. ....	68
Table 16. Formulation of the Organism-Sediment Index. ....	71
Table 17. Data Qualifiers. ....	72
Table 18. Parameters and Database Codes for SPI Analysis. ....	73
Table 19. Database Codes for Hard-bottom Video Analysis. ....	74
Table 20. Descriptions of Other Database Codes used in Benthic Monitoring. ....	76
Table 21. Data Report Quality Control Checks – Benthic Area. ....	77
Table 22. Harbor Traditional Survey Supply Checklist. ....	79
Table 23. Field Safety and Equipment Checklist. ....	80
Table 24. Example of Internal Field TSA Checklist. ....	81
Table 25. Example of Laboratory Audit Checklist. ....	82



## **LIST of APPENDICES**

### **Appendix A: MWRA Standard Operating Procedures**

- **Calculation of Baseline and Test Values for the Benthic Diversity Indices and Opportunists at the Nearfield**
- **Calculation of the Annual Threshold Value for Redox Potential Discontinuity Depth in Sediment**
- **Calculation of the Annual Threshold Values for Sediment Toxic Contamination**

### **Appendix B: Data Forms**

### **Appendix C: Cove Corporation Processing and Quality Control Procedures**

### **Appendix D: Diaz & Daughters SPI Parameters**

### **Appendix E: Specifications for Data Sets**

### A3. DISTRIBUTION LIST

Copies of this QAPP, and any subsequent revisions, will be distributed by Normandeau after approvals have been obtained. The following personnel will receive either a hard copy of the QAPP or a notice that a PDF is available on the MWRA website.

Name	Date Sent
Betsy Reilley, MWRA	
Kenneth E. Keay, MWRA	
Yong Lao, MWRA	
Douglas Hersh, MWRA	
Eric Nestler, Normandeau	
Robert Hasevlat, Normandeau	
Deborah Rutecki, Normandeau	
Ann Pembroke, Normandeau	
Erik Fel'Dotto, Normandeau	
Hannah Proctor, Normandeau	
Robert Diaz, Diaz & Daughters	
Barbara Hecker, Hecker Environmental	
Nancy Mountford, Cove Corporation	
Russell Winchell, Ocean's Taxonomic Services	

## **A4. PROJECT AND TASK ORGANIZATION**

### **A4.1 QAPP Introduction**

This Quality Assurance Project Plan (QAPP) presents the organization, objectives, functional activities, and specific quality assurance (QA) and quality control (QC) activities associated with the Benthic Monitoring that will be conducted in support of the Massachusetts Water Resources Authority (MWRA) Harbor and Outfall Monitoring Program (HOM Contract OP326B). This document also describes the specific protocols that will be followed for sampling, sample handling and storage, chain of custody, laboratory and field analyses, data review and validation, document management, data management, and data usability assessment. The monitoring program described by this QAPP reflects changes outlined in the 2010 revision to the Ambient Monitoring Plan (MWRA 2010) and requirements specified by Contract OP326B.

This QAPP was prepared in accordance with EPA guidance documents as described in Section A9.4.1 and is also based on prior HOM QAPPs that guided previous monitoring activities (e.g., Nestler et al. 2014). Separate survey plans will supplement this QAPP. The survey plans will provide the operational details required to conduct each survey, and will describe participating staff, schedule details, and specific equipment.

### **A4.2 Project Organization**

The Benthic Monitoring tasks will be accomplished through the coordinated efforts of personnel from Normandeau, Cove Corporation, Diaz and Daughters, Hecker Environmental, and several additional sub-consultants. In addition, the MWRA's Department of Laboratory Services (DLS) will analyze sediment samples collected during this project for chemical parameters.

#### **MWRA**

The following MWRA managers will be informed of matters pertaining to work described in this QAPP.

- Dr. Betsy Reilly, Director of the MWRA Environmental Quality, Water & Wastewater Department (ENQUAL).
- Mr. Ken Keay, MWRA Harbor and Outfall Monitoring Program (HOM) Project Manager. Mr. Keay has primary administrative and budgetary oversight of the program.
- Dr. Douglas Hersh, MWRA Environmental Monitoring and Management System (EM&MS) Database Manager.
- Dr. Yong Lao, MWRA Department of Laboratory Services (DLS). Dr. Lao will be responsible for all sediment chemistry laboratory analyses.

#### **Normandeau**

- Mr. Eric Nestler, Normandeau Program Manager, is responsible for the overall performance of this project, for ensuring that products and services that meet MWRA's expectations are delivered in a timely and cost-effective manner. He is responsible for ensuring that data collection and interpretation are scientifically defensible and for responding to technical challenges as they arise (all Tasks). He will also be responsible for providing overall direction and coordination of the benthic monitoring tasks, providing adequate resources to the management team, oversee data management, and oversee data analysis and report preparation.

- Ms. Ann Pembroke, Normandeau Corporate Officer and Technical Advisor, will be responsible for ensuring that project goals are achieved, and providing adequate resources to the project manager and management team. She will also provide the overall technical review for the project.
- Mr. Robert Hasevlat, Normandeau Project Quality Assurance (QA) Officer, is responsible for reviewing the QAPP, survey and data reports, and the harbor and outfall synthesis reports. He will also review QA Statements submitted by subcontractors for quality, completeness, and adherence to the QAPP. As Normandeau's Health & Safety Officer, Mr. Hasevlat will also review and approve the health and safety plans and procedures for the project.
- Ms. Deborah Rutecki, Normandeau's Assistant Program Manager, will prepare the QAPP, and assist with oversight of data management, data analysis and report preparation. Ms. Rutecki will directly participate in all aspects of the hard-bottom benthos survey.
- Mr. Erik Fel'Dotto will manage Normandeau's field efforts including the benthic sample collection.
- Ms. Hannah Proctor is the Normandeau Task Manager for the laboratory analyses and the resultant databases and will support the Benthic Infaunal survey and analysis tasks.
- Dr. Chris Gurshin is Normandeau's Statistical Advisor for the project and will assist as needed with data analysis and interpretation.

#### **Ocean's Taxonomic Services**

- Mr. Russell Winchell will support the Benthic Infauna tasks by providing identification and enumeration of all oligochaetes.

#### **Cove Corporation**

- Ms. Nancy Mountford will support the Benthic Infauna tasks by managing the sorting of the soft-bottom benthic samples and overseeing the identification and enumeration of the organisms found in the samples.

#### **Diaz and Daughters**

- Dr. Robert Diaz is the Principal Investigator for Sediment Profile Imagery (SPI).

#### **Hecker Environmental**

- Dr. Barbara Hecker is Principal Investigator for hard-bottom community analysis.

#### **CR Environmental, Inc.**

- Mr. John H. Ryther, Jr. will provide vessel support and equipment logistics for the hard-bottom survey.

#### **Ocean Eye**

- Mr. William Campbell will provide and operate the video camera for the hard-bottom survey.

Contact information and specific project roles for project participants are summarized in Table 1.

**Table 1. Personnel Responsibilities and Contact Information for Benthic Monitoring Program.**

Name/ Affiliation	Address	Project Area Assignment	Contact Information
<b>MWRA</b>			
Dr. Betsy Reilley	Environmental Quality Department MWRA Charlestown Navy Yard 100 First Ave. Boston, MA 02129	Director of Environmental Quality Department	Ph: (617) 788-4940 Fx: (617) 788-4888 betsy.reilley[at]mwra.com
Mr. Ken Keay		Project Manager; Benthic Monitoring Project Area Manager	Ph: (617) 788-4947 Fx: (617) 788-4888 kenneth.keay[at]mwra.com
Dr. Douglas Hersh		EM&MS Database Manager	Ph: (617) 788-4945 Fx: (617) 788-4888 douglas.hersh[at]mwra.com
Dr. Yong Lao	Department of Laboratory Services MWRA 190 Tafts Avenue Winthrop, MA 02152	DLS Project Manager Primary point of contact concerning sediment chemistry analyses	Ph: (617) 660-7800 Fx: (617) 660-7960 yong.lao[at]mwra.com
<b>Normandeau</b>			
Mr. Eric Nestler	Normandeau Associates, Inc. 25 Nashua Road Bedford, NH 03110	Program Manager <b>(All Tasks)</b>	Ph: (603) 637-1146 Fax: (603) 472-7052 enestler[at]normandeau.com
Ms. Deborah Rutecki		Assistant Program Manager <b>(All Tasks)</b> ; QAPP Editor <b>(Task 3)</b> , Data Manager <b>(Task 4)</b> , Data analyst and report author <b>(Tasks 14 and 15)</b>	Ph: (508) 815-5505 Fax: (508) 548-2004 drutecki[at]normandeau.com
Ms. Ann Pembroke		Technical Advisor <b>(All Tasks)</b>	Ph: (603)-637-1169 Fax: (603) 472-7052 apembroke[at]normandeau.com
Mr. Robert Hasevlat		Project QA Officer <b>(Tasks 3 and 4)</b> ; Project Health and Safety Officer	Ph: (603) 637-1142 Fax: (603) 472-7052 rhasevlat[at]normandeau.com
Ms. Hannah Proctor		Task Manager - Benthic faunal analysis <b>(Task 7)</b>	Ph: (603) 637-1162 Fax: (603) 472-7052 hproctor[at]normandeau.com
Mr. Erik Fel'Dotto	Normandeau Associates, Inc. 43 Harbor Road Hampton, NH 03842	Field Manager - Benthic Surveys; <b>(Tasks 5 and 6)</b>	Ph: (603) 926-7661 Fax: (603) 929-1434 efeldotto[at]normandeau.com
Dr. Chris Gurshin	Normandeau Associates, Inc. 30 International Drive, Suite 6 Portsmouth, NH 03801	Project Biostatistician <b>(Tasks 14 and 15)</b>	Ph: (603)-319-5304 Fax: (603) 334-6397 cgurshin[at]normandeau.com
<b>Subcontractors</b>			
Dr. Barbara Hecker	Hecker Environmental 26 Mullen Way Falmouth, MA, 02540	Hard-bottom: Data analysis; QA; Documentation and Transmission ; Survey and Report; Hard-bottom Image Analysis; Technical Workshop, and Summary Report <b>(Tasks 4, 6.3, 7.5, 14, and 15)</b>	Ph: (508) 457-4672 bhhecker[at]earthlink.net
Dr. Robert J. Diaz	Diaz & Daughters 6198 Driftwood Lane Ware Neck, VA, 23178	Sediment Profile Imaging: Sample Analysis; QA, Data Documentation and Transmission; Survey and Report; Sediment Profile Image Analysis; Technical Workshop, and Summary Report <b>(Tasks 4, 5.2, 6.2, 7.4, 14, and 15)</b>	Ph: (804) 815-2252 Fx: (804) 684-7399 bdiaz[at]visi.net or diaz[at]vims.edu

**Table 1, continued.**

Name/ Affiliation	Address	Project Area Assignment	Contact Information
<b>Subcontractors, continued.</b>			
Ms. Nancy Mountford	Cove Corporation 10200 Breeden Road Lusby, MD 20657	Benthic Taxonomic Analysis, <b>(Task 7)</b>	Ph: (410) 326-4577 covelab[at]chesapeake.net
Mr. Russell Winchell	Ocean's Taxonomic Services 948 Head of the Bay Road Plymouth, MA 02360	Benthic Taxonomic Analysis, Oligochaetes; <b>(Task 7)</b>	Ph: (508) 759-8284 oceanstaxonomic[at]msn.com
Mr. John H. Ryther Jr.	CR Environmental 639 Boxberry Hill Road East Falmouth, MA, 02536	Vessel Coordination/Equipment Logistics for Hard-bottom Survey; <b>(Task 6.3)</b>	Ph: (508) 563-7970 Fx: (508) 563-7970 chip[at]crenvironmental.com
Mr. William Campbell	Ocean Eye Inc. 4 Wildrose Court. Warwick, RI 02888	Operation of video camera for Hard-bottom Survey (Task 6.3)	Ph: (401) 523-7399 OceanROV[at]Aol.com

## A5. PROBLEM DEFINITION AND BACKGROUND

### A5.1 Historical Background

Boston Harbor has a long history of anthropogenic impacts including the damming of rivers, filling of salt marshes and shallow embayments, and the direct discharge of sewage waste products, all of which have had profound impacts on the composition of the biological communities in the harbor. Prior to the 1950s, raw sewage was discharged into Boston Harbor primarily from three locations: Moon Island, Nut Island, and Deer Island. In 1952, the Nut Island treatment plant became operational and began treating sewage from the southern part of Boston's metropolitan area. The Deer Island treatment plant was completed in 1968, thus providing treatment for sewage from the northern part of the area. Moon Island was relegated to emergency status at that time and little used thereafter. The effluent was discharged continuously from both plants, averaging a total of 360 million gallons per day (MGD). Storm events caused up to 3.8 billion gallons per year (BGY) of additional material to be occasionally discharged to the harbor through the system of combined sewer overflows (CSOs) (Rex et al. 2002).

Sludge, after separation from the effluent, was digested anaerobically prior to discharge. Digested sludge from Nut Island was discharged through an outfall near Long Island on the southeastern side of President Roads. Sludge from Deer Island was discharged on the northern side of President Roads. Sludge discharges were timed to coincide with the outgoing tide, under the assumption that the tide would carry the discharges out of the harbor and away offshore. Unfortunately, studies showed that the material from Nut Island often was trapped near the tip of Long Island and carried back into the harbor on incoming tides (McDowell et al. 1991). In 1972, the Federal Clean Water Act (CWA) mandated secondary treatment for all sewage discharges to coastal waters, but an amendment allowed communities to apply for waivers from this requirement. The metropolitan Boston area's waiver application was denied by the US Environmental Protection Agency (EPA), partly on the basis of the observed degradation of the benthic communities in Boston Harbor. In 1985, in response to both the EPA mandate to institute secondary treatment and a Federal Court order to improve the condition of Boston Harbor, the Massachusetts Water Resources Authority (MWRA) was created. The MWRA instituted a multifaceted approach to upgrading the sewage treatment system, including an upgrade in the treatment facility itself and construction of a new outfall pipe to carry the treated effluent to a diffuser system in Massachusetts Bay located 15 km offshore in deep water.

Since 1985, the MWRA has been responsible for the development and maintenance of greater Boston's municipal wastewater system. In 1989, discharge of more than 10,000 gallons per day of floatable pollutants comprising grease, oil, and plastics from the Deer Island and Nut Island treatment plants was ended. Sludge discharge ceased in December 1991. In 1995, a new primary treatment plant at Deer Island was completed, increasing the system's overall capacity and the effectiveness of the treatment. In August 1997, the first phase of secondary treatment was completed, increasing the level of solids removal to 80%. For the first time, the MWRA's discharge met the requirements of the CWA (Rex et al. 2002).

In October 1998, the old Nut Island plant was officially decommissioned. By 2000, the average effluent solids loading to the harbor had decreased to less than 35 tons per day (TPD). Secondary treatment was achieved in phases, with the final phase completed in 2000 and becoming fully operational in 2001. In September 2000, the effluent from Deer Island was diverted to a new outfall approximately 15 km offshore, in 32 m water depth in Massachusetts Bay.

Ongoing MWRA pollution abatement projects for Boston Harbor involve reducing the number and discharge volumes from Combined Sewer Overflows (CSOs). In 1988, 88 CSOs discharged a total of about 3.3 billion gallons per year (BGY). By 1998, 23 CSOs had been closed, and pumping

improvements reduced discharges to about 1 BGY, of which about 58% was screened and disinfected. At the end of 2004, 63 CSOs remained in Boston Harbor and its tributaries (Coughlin 2005). At the end of 2015, all projects were completed and the number of CSO outfalls was reduced to 50, with an estimated discharge of 0.4 BGY, of which 93% was treated by screening and disinfection (MWRA 2016).

All of these improvements—the improved effluent treatment, the complete cessation of sludge discharge to the harbor in 1991, and the transfer of wastewater discharge offshore—were implemented to improve the water quality in Boston Harbor and to increase effluent dilution with minimal impact on the environment of Massachusetts and Cape Cod Bays. Taylor (2005, 2006) summarized the major patterns in freshwater flows and loadings of total nitrogen (TN), total phosphorus (TP), total suspended solids (TSS), and particulate organic carbon (POC) to Boston Harbor between 1995 and 2005 and showed that the changes in wastewater discharge from 1991 to 2005 resulted in an 80–95% decrease in loadings to the harbor. Annual average loadings of TSS and POC showed a progressive decrease, starting in 1991/1992 and proceeding through 2001, after which the average loadings remained low and similar between years. For TN and TP, loadings showed some decrease with the end of sludge discharge, but remained elevated through 1998, when Nut Island flows were discharged closer to the mouth of the harbor, resulting in decreased inputs to the harbor. TN and TP showed additional, larger decreases with the transfer of the effluent discharge offshore in 2000.

## **A5.2 Regulatory Overview**

The offshore outfall is regulated under a permit issued to MWRA by the United States Environmental Protection Agency (USEPA) and Massachusetts Department of Environmental Protection (DEP), under the National Pollutant Discharge Elimination System (NPDES). The permit stipulates that MWRA must monitor the outfall effluent and the ambient receiving waters to test for compliance with NPDES permit requirements. Receiving water monitoring activities are specified in a monitoring plan that has been designed to address three primary objectives: (1) Test for compliance with NPDES permit requirements, (2) Test whether the impact of the discharge on the environment is within the bounds predicted by the Supplemental Environmental Impact Study (SEIS) (EPA 1988), and (3) Test whether any changes within the system exceed any of the Contingency Plan thresholds, including those for sediment redox depth, toxic contaminant concentrations, community structure, or abundance of opportunistic species (MWRA 2001). A monitoring plan was initially developed to address baseline monitoring (MWRA 1991), and has been modified over time to cover post-diversion monitoring (MWRA 1997a), with two revisions (MWRA 2004, 2010). Current monitoring activities are stipulated in the 2010 Ambient Monitoring Plan (MWRA 2010).

The Contingency Plan (MWRA 2001), which was developed pursuant to a Memorandum of Agreement among the National Marine Fisheries Service, USEPA, and MWRA, is an attachment to MWRA's discharge permit. Warning-level thresholds listed in the plan are based on effluent limits, observations from baseline monitoring, national water quality criteria, state standards, and, in some cases, best professional judgment. The Contingency Plan also details the process of how the MWRA would respond to any exceedances of the threshold values. Threshold values for benthic monitoring were originally based on averages calculated for the period 1992 through 2000, i.e., from the beginning of the monitoring program through September 2000, when diversion of highly treated effluent to the new outfall was initiated. Beginning in 2004, a subset of the original suite of stations was sampled, with some stations scheduled to be sampled every year and others to be sampled every other year (Williams et al. 2005). Consequently, the benthic community thresholds were recalculated to reflect the stations actually sampled in alternate years. Following revisions to the monitoring plan in 2010 (MWRA 2010), a new subset of the original stations has been monitored annually. Benthic community thresholds were recalculated in 2011 to reflect the stations sampled in the current monitoring program (Appendix A).



### A5.3 Scientific Perspective

Most pollutants are particle reactive; therefore, the sediments become the final sinks for these pollutants and represent the part of the ecosystem where disruption by toxic or enrichment effects is expected. Surficial sediments are critical to many ecosystem functions with energy flows (organic carbon, living biomass, secondary production) and nutrients (nitrogen, phosphorus) regulated by processes at the sediment-water interface. Thus, characterization of the benthic environment from physical and biological points of view has been a key part of the MWRA's long-term sediment monitoring within Boston Harbor and Massachusetts Bay. In Boston Harbor, the focus is on tracking the potential recovery of the benthic communities after pollution abatement.

Plans to relocate the outfall raised concerns about potential effects of the discharge on the offshore benthic (bottom) environment. These concerns, which were focused on three issues (eutrophication and related low levels of dissolved oxygen, accumulation of toxic contaminants in depositional areas, and smothering of animals by particulate matter), are addressed by the benthic monitoring component of MWRA's Harbor and Outfall Monitoring (HOM) program. The studies included in the monitoring plan (MWRA 1991, 1997a, 2004, 2010) are more extensive than necessary to calculate the Contingency Plan threshold values or to meet the NPDES permit requirements.

The outfall benthic monitoring program was designed to address a series of questions (MWRA 2001) regarding sediment contamination and tracers, and the benthic communities:

- *What is the level of sewage contamination and its spatial distribution in Massachusetts and Cape Cod Bays sediments before discharge through the new outfall?*
- *Has the level of sewage contamination or its spatial distribution in Massachusetts and Cape Cod Bays sediments changed after discharge through the new outfall?*
- *Have the concentrations of contaminants in sediments changed?*
- *Have the sediments become more anoxic; that is, has the thickness of the sediment oxic layer decreased?*
- *Has the soft-bottom community changed?*
- *Are any benthic community changes correlated with changes in levels of toxic contaminants (or sewage tracers) in sediments?*
- *Has the hard-bottom community changed?*

Extensive information collected over a nine-year baseline period and a ten-year post-diversion period has allowed a more complete understanding of the bay system and has provided data to address these monitoring questions. Annual monitoring of the benthic environment at both nearfield and farfield locations has indicated only modest impacts at stations closest to the discharge, and no evidence of outfall-related changes in the farfield (Nestler et al. 2016, Maciolek et al. 2008). The only change that appears to have been directly related to the operation of the outfall was a localized increase in the abundance of the sewage tracer *Clostridium perfringens* at stations located within 2 km of the discharge. Other changes, such as levels of anthropogenic contaminants, deepening of the apparent color-RPD layer, and changes in the numbers of certain benthic species, appear to be related to processes such as storm-induced shifts in sediment composition or the natural fluctuations of biological populations. Some changes seen at hard-bottom reference stations may be related to physical disturbances caused by increased anchoring activities in the farfield.

### A5.3.1 Objectives and Scope

The objectives of the benthic monitoring program are to (1) verify compliance with discharge permits, (2) improve MWRA's ability to predict the environmental impact of relocating the outfall to Massachusetts Bay, (3) measure the actual impact on the bay, and (4) measure the recovery of the harbor.

The principal objective of the harbor studies is the documentation of continuing recovery of benthic communities in areas of Boston Harbor in response to decreases in wastewater discharges; for example, reductions in CSO releases (Pembroke et al. 2016). The harbor recovery monitoring includes evaluation of local and area-wide changes in the Boston Harbor system that have resulted from (1) improvements in wastewater treatment practices (e.g., cessation of sludge discharge and conversion from primary to full secondary treatment), (2) diversion of the effluent to the new ocean outfall, and (3) improvements to CSO control systems.

Outfall studies include monitoring the response of benthic communities in Massachusetts and Cape Cod Bays to effluent discharge that began in September 2000. This monitoring program focuses most intensely on nearfield sites in western Massachusetts Bay (0 to 8 km from the outfall), where potential changes in water and sediment quality were predicted to occur following initiation of the discharge. Farfield areas (typically >8 km from the outfall), which serve primarily as reference areas for the nearfield, are also examined as part of the monitoring studies.

Additional objectives are to provide data that will be used to

- Evaluate responses against contingency plan thresholds
- Determine ecologically meaningful changes with statistical rigor and evaluate these changes as possible responses of benthic communities to cessation of discharges in Boston Harbor or to the continuation of treated wastewater discharges through the outfall diffuser
- Continue to develop an understanding of the dynamics and status of the ecosystem
- Correlate changes in benthic community parameters to changes in sediment concentrations of organic matter, sewage tracers, and potentially toxic chemical contaminants.

These objectives are addressed by four major tasks as defined in the MWRA Benthic Monitoring Agreement II (see tasks 5-7, 14 and 15 below). Tasks 5 and 6 focus on sampling activities that will take place in Boston Harbor, Massachusetts Bay, and Cape Cod Bay in 2017, 2018, and 2019. Task 7 includes the analysis of the collected faunal samples and benthic images. Faunal and chemistry data will be presented at the annual Technical Workshops (Task 14) and summarized in report format under Task 15.

**Harbor Benthic Surveys (Task 5)** include traditional grab sampling to collect sediment samples for characterization of the physical, chemical, and biological status of surficial sediments at nine stations throughout Boston Harbor and an extensive reconnaissance survey based on sediment profile images (SPI).

**Outfall Benthic Surveys (Task 6)** include nearfield and farfield soft-bottom surveys using traditional grab sampling methods, SPI sampling in the nearfield to provide a rapid evaluation of those sedimentary habitats, and a nearfield benthic remotely operated vehicle (ROV) survey (2017 only) to provide semi-quantitative data about hard-bottom community responses in the vicinity of the outfall. The data will be evaluated by MWRA for possible exceedances of monitoring thresholds.

**Analysis of Benthic Fauna (Task 7)** includes the determination of the benthic soft- and hard-bottom community structure. Benthic fauna recovered from sediment grab samples collected under

Tasks 5 and 6 will be identified and counted. Results will be evaluated statistically to characterize benthic community structure and to make temporal and spatial comparisons of community parameters within the harbor and bays ecosystems. Soft-bottom habitats will be examined through the analysis of SPI photographs. Hard-bottom communities (faunal and floral) will be evaluated through analysis of videotape for possible responses to the effluent discharge from the outfall. A reference collection of all soft-bottom taxa (identified and unidentified specimens) will be stored, maintained, and compiled throughout the project.

**Annual Technical Presentations (Task 14)** includes the presentation of monitoring results at the annual multidisciplinary technical workshop hosted by MWRA. Data developed under Tasks 5–7 will be presented, covering sedimentary characteristics and benthic communities in the nearfield and farfield of Massachusetts and Cape Cod Bays.

**Synthesis Reports (Task 15)** includes the annual preparation of two (harbor and outfall) summary reports in which data developed under Tasks 5–7 will be presented. These reports will evaluate current sediment conditions and the status of benthic communities in the nearfield and farfield of Massachusetts and Cape Cod Bays and Boston Harbor. The outfall reports will be based on presentations made at the annual technical workshop (Task 14).

## **A6. PROJECT/TASK DESCRIPTION**

### **A6.1 Boston Harbor Studies**

Boston Harbor surveys provide benthic samples and other data that can document long-term improvement of sediment quality and recovery of benthic communities following the cessation of sludge and effluent discharge into the harbor. Information from an extensive reconnaissance (SPI) survey supplements traditional infaunal data to provide a broad-scale picture of harbor benthic conditions. Harbor surveys also provide the opportunity to take samples necessary for monitoring sediment contamination near CSO discharges, however, other than C019, CSO stations will not be sampled.

During the harbor survey (Task 5.1), which will be conducted in August, soft-sediment grab samples will be collected from nine locations (Table 2, Figure 1). Eight stations (T01–T08) were selected early in this monitoring program after consideration of historic sampling sites and harbor circulation patterns (Kelly and Kropp 1992). A ninth station, CSO station C019, was added in 2004. Following faunal identification and enumeration (Task 7.2), data from these nine stations will be analyzed for benthic infaunal community parameters (Task 14). Sediment samples from these same stations will be analyzed for selected physical sediment parameters and sewage tracers by MWRA's DLS.

To provide greater geographic coverage for the study of benthic community recovery, a harbor reconnaissance survey (Task 5.2) will be conducted during August of each year. SPI will be obtained at 61 reconnaissance stations each year (Table 2, Figure 1).

Details of field collection, sample handling, and laboratory methods to be used in the harbor benthic studies are given in Sections B-2, B-3, and B-4, respectively.

**Table 2. Target Locations for Harbor Traditional and Reconnaissance Stations**

Station	Grab samples <sup>1</sup>	SPI survey <sup>2</sup>	Latitude	Longitude	Depth (m)
<b>Traditional Stations</b>					
T01	X	X	42°20.95'N	70°57.81'W	4.9
T02	X	X	42°20.57'N	71°00.12'W	6.8
T03	X	X	42°19.81'N	70°57.72'W	8.7
T04	X	X	42°18.60'N	71°02.49'W	4.0
T05A	X	X	42°20.38'N	70°57.64'W	17.5
T06	X	X	42°17.61'N	70°56.66'W	6.6
T07	X	X	42°17.36'N	70°58.71'W	5.9
T08	X	X	42°17.12'N	70°54.75'W	11.3
C019	X	X	42°21.55'N	71°02.71'W	9.3
<b>Reconnaissance Stations</b>					
R02		X	42°20.66'N	70°57.69'W	13.8
R03		X	42°21.18'N	70°58.37'W	4.5
R04		X	42°21.52'N	70°58.78'W	7.2
R05		X	42°21.38'N	70°58.68'W	5.7
R06		X	42°19.91'N	70°57.12'W	6.7
R07		X	42°20.85'N	70°58.53'W	5.6
R08		X	42°20.66'N	70°59.50'W	3.5
R09		X	42°20.80'N	71°00.98'W	11.6
R10		X	42°21.32'N	71°02.20'W	12.8
R11		X	42°19.28'N	70°58.48'W	7.3
R12		X	42°19.10'N	70°58.47'W	6.1
R13		X	42°19.03'N	70°58.84'W	6.7
R14		X	42°19.25'N	71°00.77'W	7.0
R15		X	42°18.92'N	71°01.15'W	4.4
R16		X	42°18.95'N	70°57.68'W	8.0
R17		X	42°18.29'N	70°58.63'W	8.1
R18		X	42°17.33'N	70°57.67'W	8.0
R19		X	42°16.92'N	70°56.27'W	9.2
R20		X	42°19.49'N	70°56.10'W	11.2
R21		X	42°18.53'N	70°56.78'W	8.7
R22		X	42°18.02'N	70°56.37'W	9.4
R23		X	42°17.63'N	70°57.00'W	10.8
R24		X	42°17.78'N	70°57.51'W	7.4
R25		X	42°17.48'N	70°55.72'W	7.3
R26		X	42°16.13'N	70°55.80'W	7.0

**Table 2. (continued)**

Station	Grab samples <sup>1</sup>	SPI survey <sup>2</sup>	Latitude	Longitude	Depth (m)
R27		X	42°16.83'N	70°54.98'W	4.8
R28		X	42°16.90'N	70°54.52'W	8.4
R29		X	42°17.38'N	70°55.25'W	11.0
R30		X	42°17.43'N	70°54.25'W	3.8
R31		X	42°18.05'N	70°55.03'W	10.0
R32		X	42°17.68'N	70°53.82'W	5.0
R33		X	42°17.65'N	70°59.67'W	5.0
R34		X	42°17.33'N	71°00.42'W	4.0
R35		X	42°17.05'N	70°59.28'W	4.8
R36		X	42°16.53'N	70°59.20'W	5.0
R37		X	42°17.93'N	70°59.08'W	6.0
R38		X	42°17.08'N	70°57.83'W	7.0
R39		X	42°17.73'N	70°58.22'W	8.0
R40		X	42°19.73'N	71°01.45'W	4.3
R41		X	42°18.67'N	71°01.50'W	5.5
R42		X	42°19.18'N	71°01.50'W	3.9
R43		X	42°18.40'N	71°00.13'W	4.5
R44		X	42°20.62'N	71°00.13'W	9.3
R45		X	42°19.70'N	70°58.05'W	6.8
R46		X	42°17.46'N	70°55.33'W	10.5
R47		X	42°20.67'N	70°58.72'W	6.5
R48		X	42°17.61'N	70°59.27'W	5.9
R49		X	42°16.39'N	70°54.49'W	6.1
R50		X	42°16.50'N	70°53.92'W	6.1
R51		X	42°15.80'N	70°56.53'W	3.8
R52		X	42°15.71'N	70°56.09'W	3.6
R53		X	42°16.15'N	70°56.27'W	6.0

<sup>1</sup> Stations to be sampled for benthic infauna and sedimentary parameters in 2017, 2018, and 2019.

<sup>2</sup> Stations to be surveyed using SPI in 2017, 2018, and 2019.

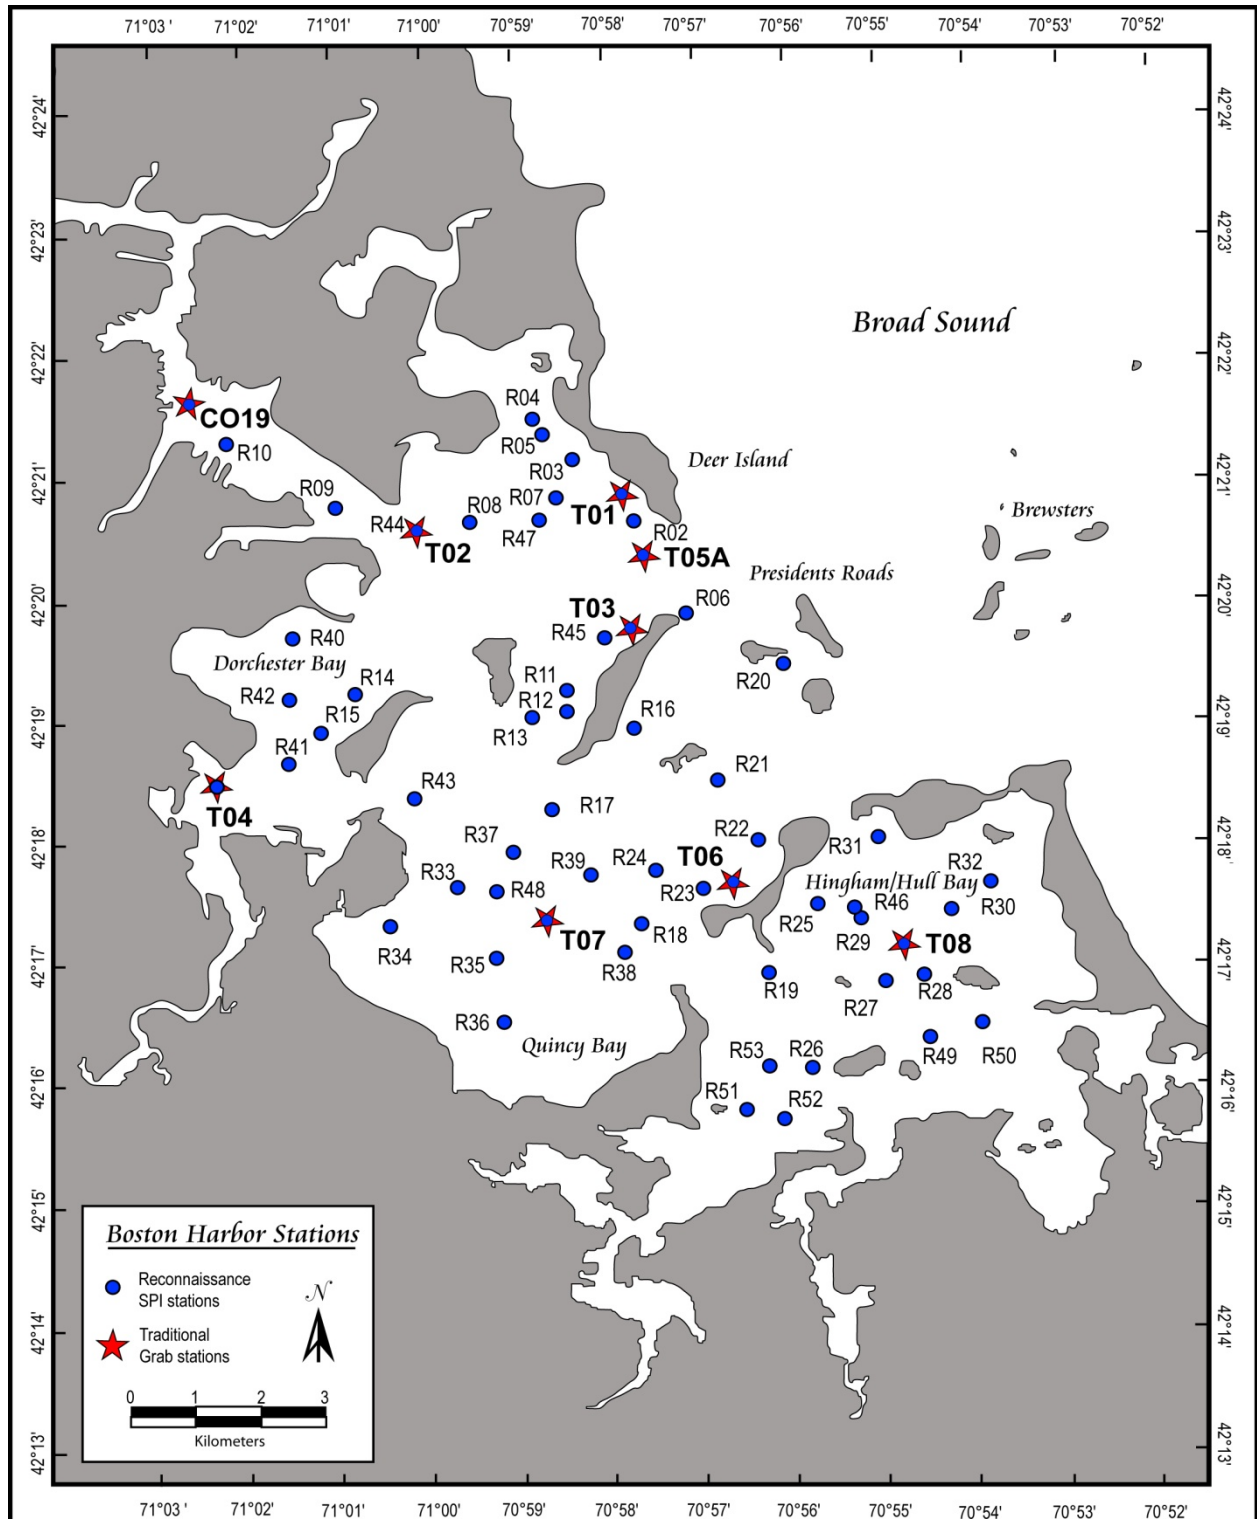


Figure 1. Locations of Boston Harbor grab and reconnaissance stations.

## A6.2 Outfall Studies

The studies conducted in the vicinity of the offshore outfall provide quantitative measurements of benthic community structure and patterns of contaminant concentrations in the sediments of Massachusetts and Cape Cod Bays. Baseline data were collected yearly in August from 1992 to 2000. In September 2000, after effluent discharge into Massachusetts Bay began, the focus of the program changed to an evaluation of the effects of the discharge on the ecosystems of both bays. Studies conducted under this part of the program will provide the data required for a quantitative assessment (Task 14) of the effects of discharged effluent on benthic infaunal and epifaunal communities and sediment chemistry (samples to be analyzed by MWRA's DLS). The objectives of the monitoring program in the post-diversion phase are (1) to satisfy National Pollutant Discharge Elimination System (NPDES) permit requirements, (2) to test whether or not any discharge-related impacts are within the limits predicted by the Supplemental Environmental Impact Study (SEIS) (EPA 1988), and (3) to determine if changes in the system exceed Contingency Plan thresholds (MWRA 1997a, b, 2001; Appendix A).

### A6.2.1 Technical Overview

Soft-sediment grab samples will be collected during outfall benthic surveys (Task 6.1) conducted in August of each year, at nearfield and farfield stations. The nearfield surveys are designed to provide spatial coverage and local detail of faunal communities inhabiting depositional environments within about 8 km of the diffuser. Eleven of the 23 nearfield stations will be sampled each year (Table 3, Figure 2). Farfield benthic surveys contribute reference and early-warning data on soft-bottom habitats within Massachusetts and Cape Cod Bays. Three farfield stations will be sampled: FF01A, FF04, and FF09 (Table 3, Figure 3). Station FF04 is within the Stellwagen Bank National Marine Sanctuary. At both nearfield and farfield stations, samples for sedimentary parameters and benthic infauna will be collected each year, while samples for analysis of contaminant chemistry will be collected in 2017 only.

The nearfield sediment profile image survey (Task 6.2) will be conducted in August of each year at all 23 nearfield stations (Table 3, Figure 4). This survey provides an area-wide, qualitative/semi-quantitative assessment of sediment quality and benthic community status that can be integrated with the results of the quantitative surveys to determine sedimentary conditions near the outfall. Because sediment profile imagery (digital since 2002) allows a faster evaluation of the benthos to be made than can be accomplished through traditional faunal analyses, this survey will allow a rapid comparison of benthic conditions to the Contingency Plan threshold (Appendix A) for depth of sediment redox potential discontinuity (RPD). At least three photographic images will be collected for analysis from each station.

Because of the relative sparseness of depositional habitats in the nearfield and in the vicinity of the diffusers, an ongoing study of hard-bottom habitats supplements the soft-bottom studies. A nearfield hard-bottom survey (Task 6.3) will take place in June 2017. Videotape footage will be taken at 23 waypoints/stations along six transects and five solitary waypoints, one of which is Diffuser #44 (Table 4, Figure 5). Twenty minutes of both analog and high-definition digital video will be acquired at each station. The high-definition digital video camera will be used to take high-resolution images that can later be grabbed as still images in the event that a more detailed analysis is required. Frame grabs of representative images will be collected from the HD-video during the cruise.

Details of field collection, sample handling, and laboratory methods to be used in the outfall benthic studies are given in Sections B-2, B-3, and B-4, respectively.

**Table 3. Target Locations for Outfall Survey Stations.**

Station	Grab samples <sup>1</sup>	SPI survey <sup>2</sup>	Latitude	Longitude	Depth (m)
<b>Nearfield Stations</b>					
FF10		X	42°24.84'N	70°52.72'W	28.7
FF12	X	X	42°23.40'N	70°53.98'W	23.5
FF13		X	42°19.19'N	70°49.38'W	20.7
NF02		X	42°20.31'N	70°49.69'W	26
NF04	X	X	42°24.93'N	70°48.39'W	34
NF05		X	42°25.62'N	70°50.03'W	36
NF07		X	42°24.60'N	70°48.89'W	32
NF08		X	42°24.00'N	70°51.81'W	28
NF09		X	42°23.99'N	70°50.69'W	29
NF10	X	X	42°23.57'N	70°50.29'W	32.9
NF12	X	X	42°23.40'N	70°49.83'W	34.9
NF13	X	X	42°23.40'N	70°49.35'W	33.8
NF14	X	X	42°23.20'N	70°49.36'W	34.1
NF15		X	42°22.93'N	70°49.67'W	32.7
NF16		X	42°22.70'N	70°50.26'W	31.1
NF17	X	X	42°22.88'N	70°48.89'W	30.6
NF18		X	42°23.80'N	70°49.31'W	33.3
NF19		X	42°22.30'N	70°48.30'W	33.2
NF20	X	X	42°22.69'N	70°50.69'W	28.9
NF21	X	X	42°24.16'N	70°50.19'W	30
NF22	X	X	42°20.87'N	70°48.90'W	30
NF23		X	42°23.86'N	70°48.10'W	36
NF24	X	X	42°22.83'N	70°48.10'W	37
<b>Farfield Stations</b>					
FF01A	X		42°33.84'N	70°40.55'W	35
FF04	X		42°17.30'N	70°25.50'W	90
FF09	X		42°18.75'N	70°39.40'W	50

<sup>1</sup> Stations to be sampled for benthic infauna and sedimentary parameters in 2017, 2018, and 2019; and for contaminant chemistry in 2017.

<sup>2</sup> Stations to be surveyed using SPI in 2017, 2018, and 2019.



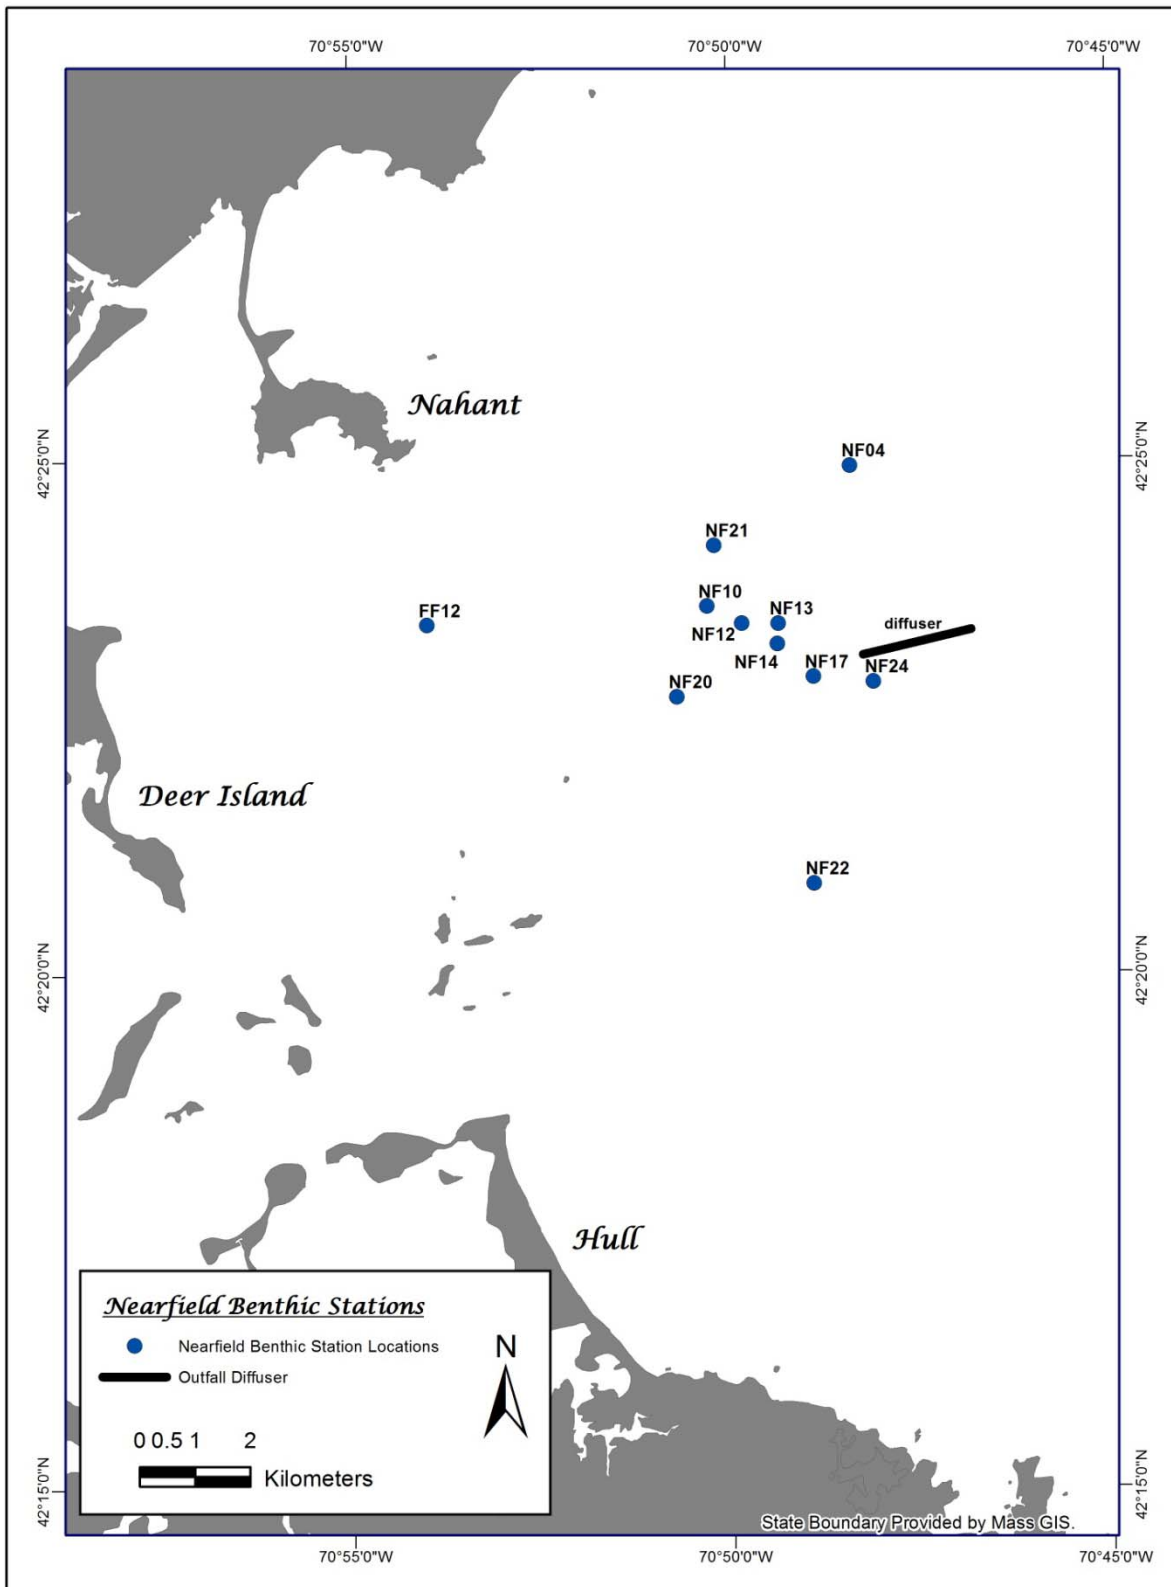


Figure 2. Locations of nearfield soft-bottom sampling stations.

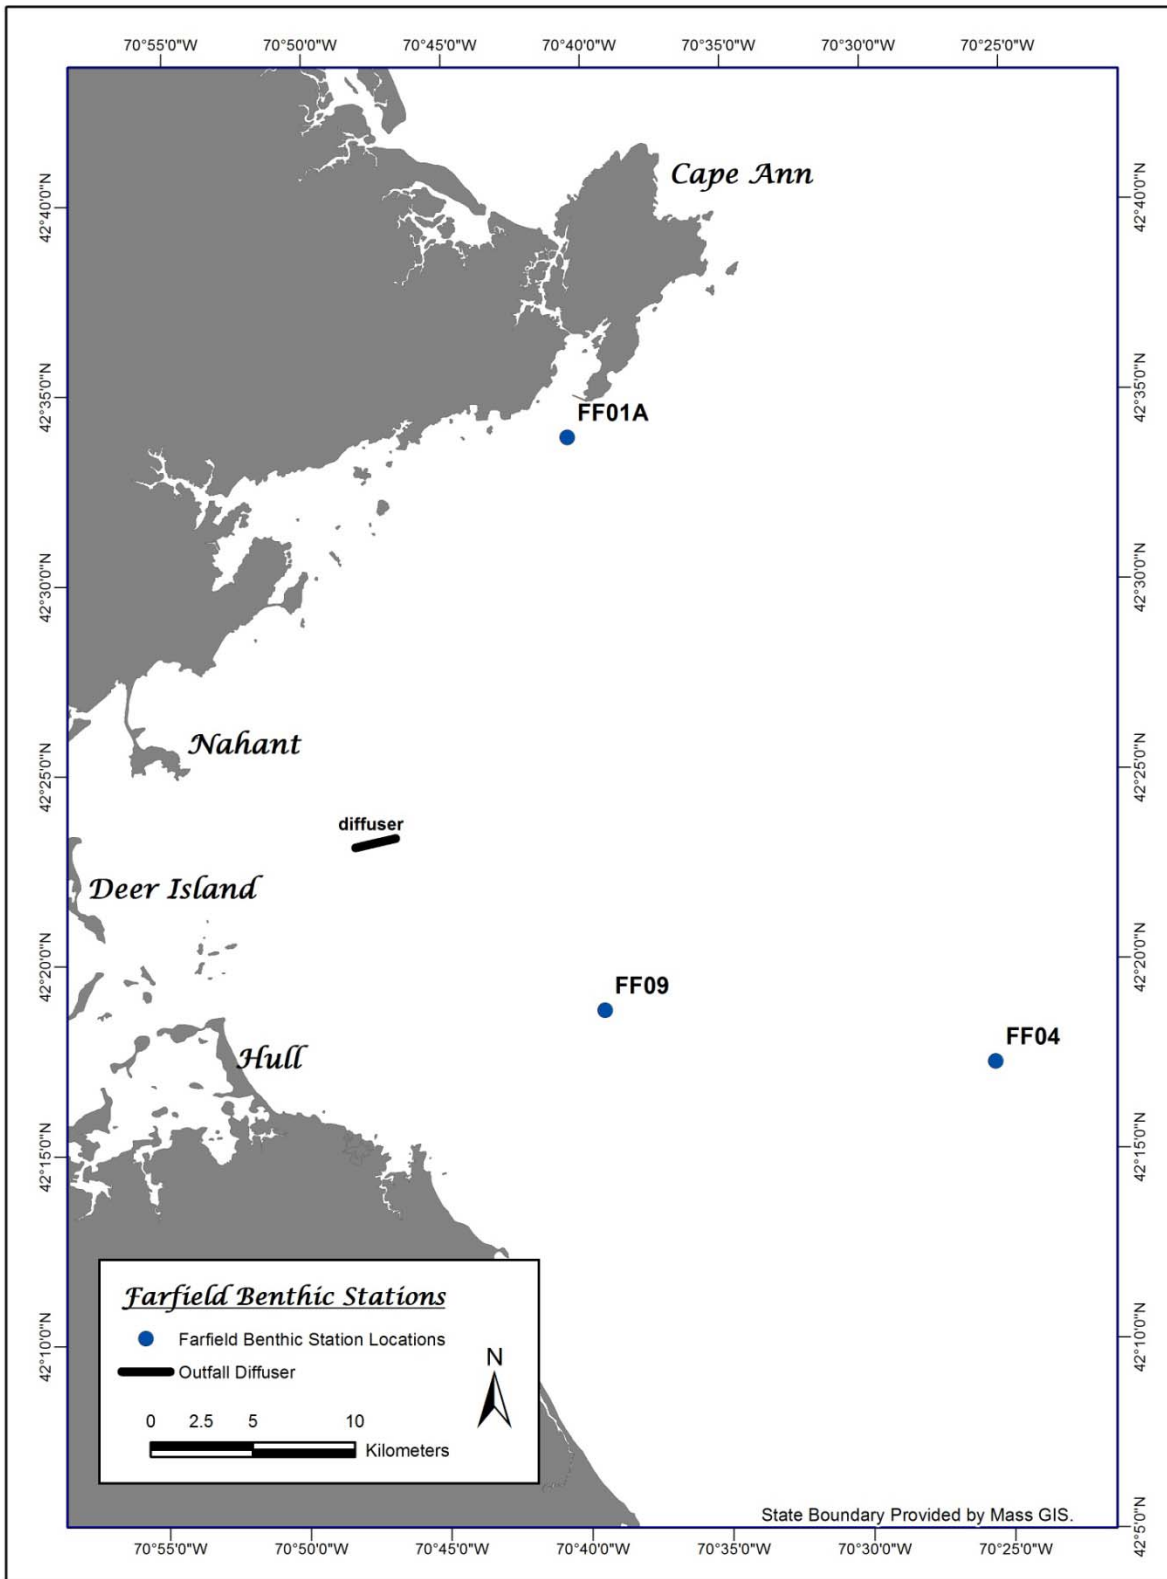


Figure 3. Locations of farfield soft-bottom sampling stations.

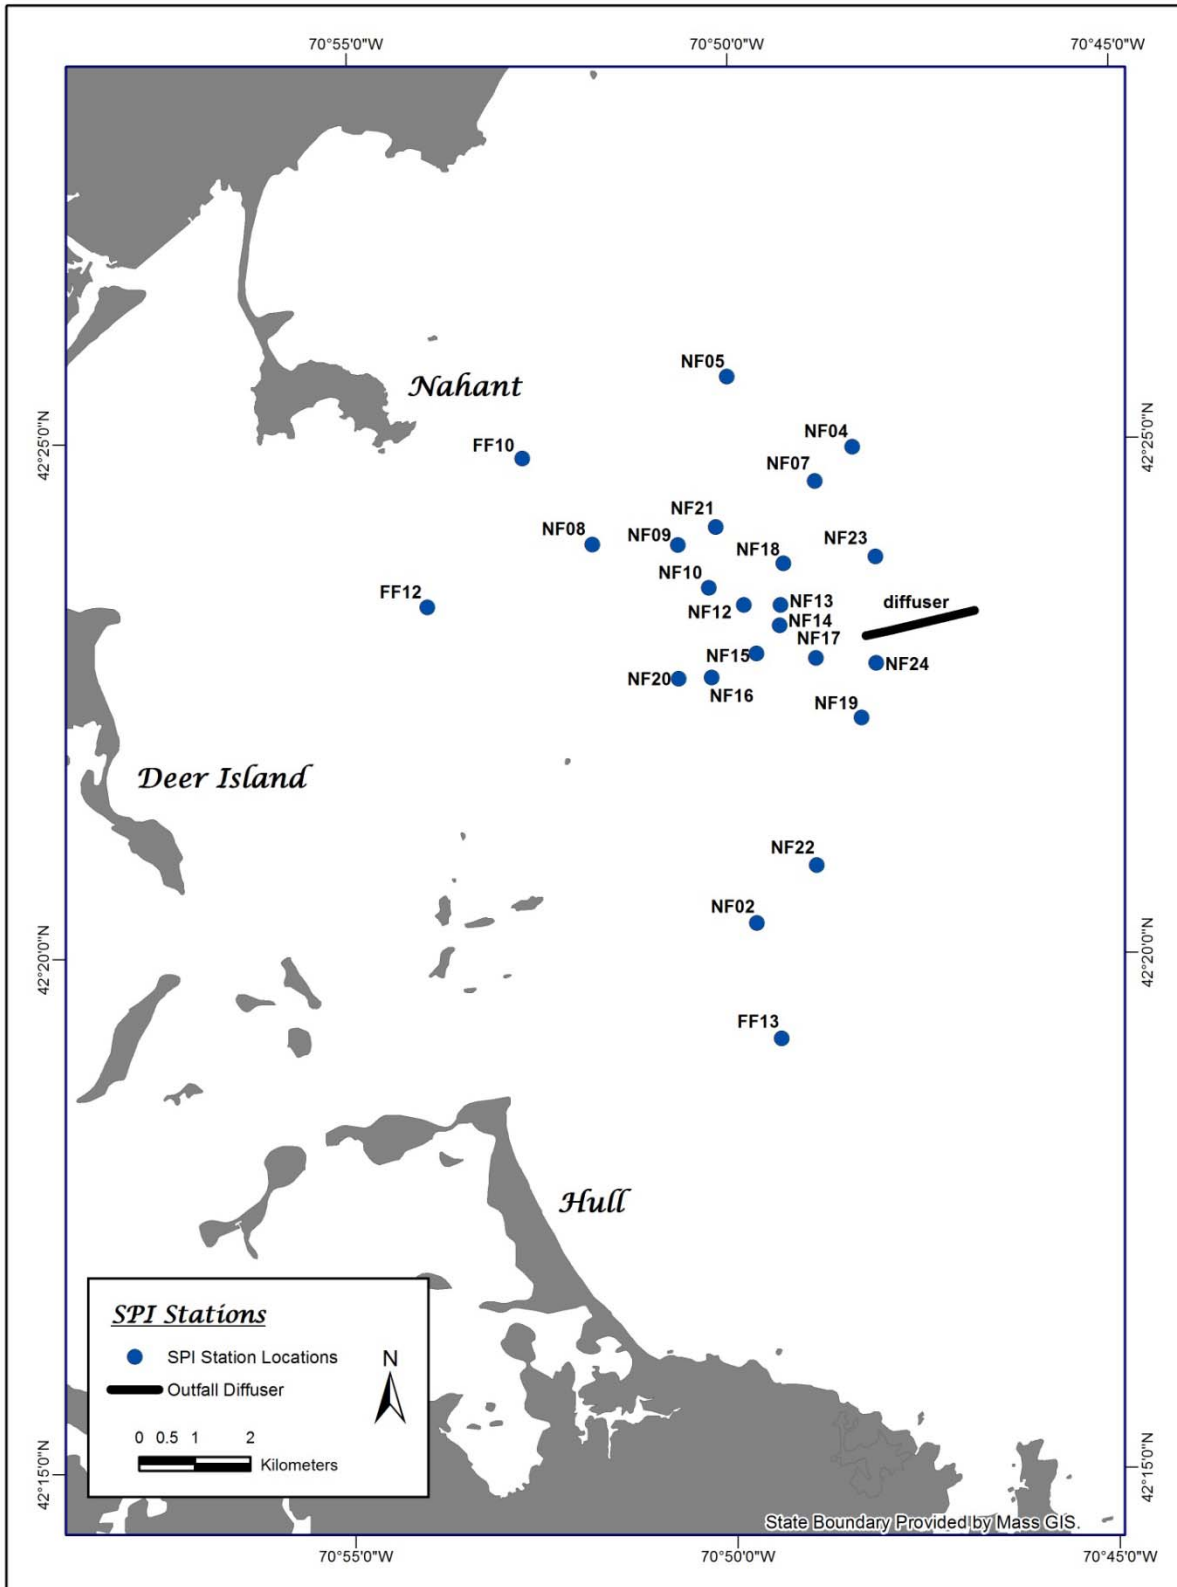


Figure 4. Locations of nearfield sediment profile imaging stations.

**Table 4. Target Locations for Hard-bottom Survey Transects.**

Transect	Waypoint/ Station	Latitude	Longitude	Depth (m)
T1	1	42°23.606'N	70°48.201'W	25
T1	2	42°23.625'N	70°48.324'W	24
T1	3	42°23.741'N	70°48.532'W	22
T1	4	42°23.815'N	70°48.743'W	20
T1	5	42°23.869'N	70°48.978'W	27
T2	1	42°23.634'N	70°47.833'W	26
T2	2	42°23.570'N	70°47.688'W	27
T2	3	42°23.525'N	70°47.410'W	26
T2	4	42°23.457'N	70°47.265'W	32
T2	5 = Diffuser #2	42°23.331'N	70°46.807'W	34
T4	2	42°23.012'N	70°46.960'W	29
T4/T6	1	42°22.948'N	70°47.220'W	23
T6	1	42°22.993'N	70°47.712'W	30
T6	2	42°22.855'N	70°47.082'W	27
T7	1	42°24.565'N	70°47.015'W	23
T7	2	42°24.570'N	70°46.920'W	24
T8	1	42°21.602'N	70°48.920'W	23
T8	2	42°21.823'N	70°48.465'W	23
T9	1	42°24.170'N	70°47.768'W	24
T10	1	42°22.680'N	70°48.852'W	26
T11	1	42°14.405'N	70°34.373'W	36
T12	1	42°21.477'N	70°45.688'W	29
Diffuser # 44		42°23.116'N	70°47.931'W	33

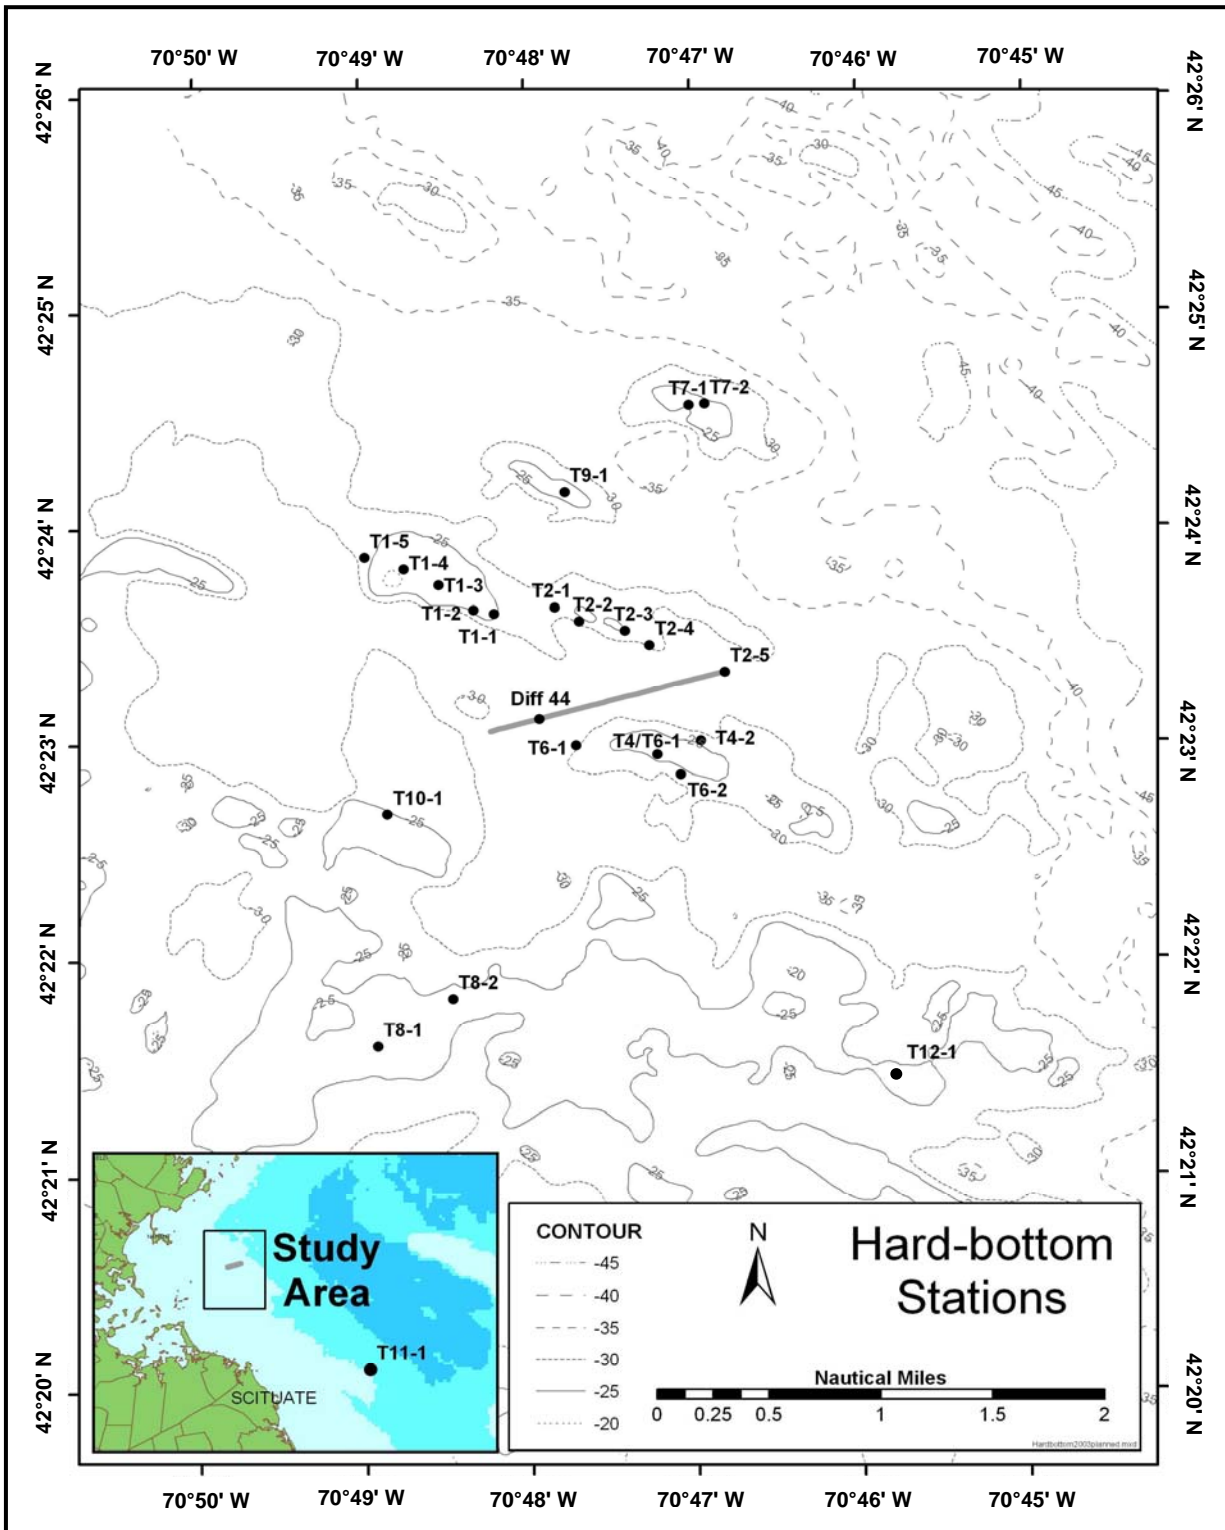


Figure 5. Locations of hard-bottom benthic monitoring stations.

### A6.2.2 Contingency Plan Thresholds

The MWRA (1997a) developed a Contingency Plan that specifies numerical or qualitative thresholds that may suggest that environmental conditions in the Bay are changing or might be likely to change. The Plan provides a mechanism to confirm that a threshold has been exceeded, to determine the causes and significance of the event, and to identify the action necessary to return the trigger parameter to a level below the threshold (if the change resulted from effluent discharge). Sediment thresholds have been established for RPD depth, benthic community diversity and relative abundance of opportunistic species, and sediment contaminant concentrations at the nearfield outfall stations (MWRA 1997a, b, 2001; Table 5; Appendix A).

Following revisions to the monitoring plan in 2010 (MWRA 2010), a new subset of the 23 nearfield stations has been monitored annually. Benthic community thresholds (Table 5; Appendix A) were revised in 2011 to reflect the stations sampled in the current monitoring program. Normandeau will not be directly testing data against thresholds under this agreement, but will notify MWRA of observed data anomalies (e.g., extremely high abundances of a single species) with the potential to affect the threshold computations when data are delivered.

### A6.3 Schedule of Activities and Deliverables

Benthic monitoring activities under this contract will span the period from the date of project initiation (January 2017) through September 2019 when the final annual (Boston Harbor) summary report is due. Activities include field sampling and laboratory analyses, with deliverables consisting of a QAPP, survey plans, survey summaries, survey reports, reference collection reports, sample analysis data submissions, data report reviews, and synthesis reports (prepared under Task 15). Schedules for these activities and deliverables for 2017–2019 are outlined in Tables 6 and 7.

**Table 5. Contingency Plan Thresholds Established by MWRA.**

Parameter	Caution Level	Warning Level
Species per sample	<42.99	None
Fisher's log-series $\alpha$	<9.42	None
Pielou's evenness ( $J'$ )	<0.57	None
Shannon-Wiener diversity ( $H'$ )	<3.37	None
Percent opportunists	10%	25%
RPD depth	<1.18 cm	None

**Table 6. Overview of Harbor and Outfall Surveys and Associated Deliverables.**

Survey Date	Survey	Due Dates		
		Survey Plan	Summary Report (1 week after survey completion)	Draft Survey Report* (1 month after survey completion)
June 2017	Nearfield Hard-bottom Survey (Task 6.3)	May 2017	—	July 2017
August 2017, 2018, 2019	Harbor Traditional and Outfall Soft-Bottom Survey <sup>1</sup> (Tasks 5.1, 6.1)	July 2017, 2018, 2019 <sup>1</sup>	August 2017, 2018, 2019 (Task 6.1 only)	September 2017, 2018, 2019 <sup>1</sup>
August 2017, 2018, 2019	Harbor Reconnaissance (SPI) and Nearfield SPI Survey <sup>2</sup> (Tasks 5.2, 6.2)	July 2017, 2018, 2019 <sup>2</sup>	August 2017, 2018, 2019 (Task 6.2 only)	September 2017, 2018, 2019 <sup>2</sup>

\* Final Survey Reports are due 2 weeks from receipt of MWRA’s comments on the draft report.

<sup>1</sup> One survey plan and one survey report will be prepared to include both the Harbor Traditional and Outfall Soft-Bottom Surveys.

<sup>2</sup> One survey plan and one survey report will be prepared for the Harbor Reconnaissance (SPI) and Nearfield SPI Surveys combined.

**Table 7. Schedule of Benthic Monitoring Data and Reporting Deliverables.**

Task	Deliverable	Due Dates <sup>1</sup>
<b>Quality Assurance Project Plan (Task 3)</b>		
Task 3.1.1: Benthic Monitoring QAPP	QAPP	Draft: April 2017 Final: May 2017
<b>Data Set Submittals (Task 4)</b>		
Task 4: Benthic Survey Data (collected under Tasks 5 and 6):	Nearfield Hard-bottom Survey Data Harbor Infaunal Survey Data Outfall Infaunal Survey Data Harbor SPI Survey Data Nearfield SPI Survey Data	15 July 2017 15 Sept. 2017, 2018, 2019 15 Sept. 2017, 2018, 2019 15 Sept. 2017, 2018, 2019 15 Sept. 2017, 2018, 2019
Task 4: Benthic Measurement Data (collected under Task 7):	Nearfield SPI Data Outfall Infaunal Data Nearfield Hard-bottom Data Harbor SPI Data Harbor Infaunal Data	30 Oct. 2017, 2018, 2019 15 Nov. 2017, 2018, 2019 15 Dec. 2017 15 Jan. 2018, 2019, 2020 15 Jan. 2018, 2019, 2020
<b>Harbor and Outfall Surveys (Tasks 5 and 6). See Table 6.</b>		
<b>Benthic Faunal Analysis (Task 7)</b>		
Task 7.1: Infaunal Reference Collection	Reference Collection Status Report	June 2018, 2019, 2020
Task 7.2: Harbor Infaunal Sample Analysis	Harbor Faunal Sorting Completion Letter Report Harbor Faunal Data Report Review	15 Nov. 2017, 2018, 2019 28 Feb. 2018, 2019, 2020
Task 7.3: Outfall Infaunal Sample Analysis	Outfall Faunal Sorting Completion Letter Report Outfall Faunal Data Report Review	Oct. <sup>2</sup> 2017, 2018, 2019 31 Dec. 2017, 2018, 2019
Task 7.4: Sediment Profile Imaging Analysis	Nearfield SPI Data Report Review Harbor SPI Data Report Review	15 Dec. 2017, 2018, 2019 28 Feb. 2018, 2019, 2020
Task 7.5: Hard-bottom Survey Image Analysis	Nearfield Hard-bottom Data Report Review	31 Jan. 2018
<b>Annual Technical Meeting (Task 14)</b>		
Task 14: Annual Technical Meeting	Hard-bottom Survey Presentation SPI Surveys, Outfall Faunal Community, and Sediment Characteristics Presentations	Spring 2018 Spring 2018, 2019, 2020
<b>Annual Synthesis Reports (Task 15)</b>		
Task 15.1: Outfall Benthic Report	Outfall Benthic Report	Draft: May 2018, 2019, 2020 Final: Jul. 2018, 2019, 2020
Task 15.2: Harbor Benthic Report	Harbor Benthic Report	Draft: Jul. 2018, 2019, 2020 Final: Sept. 2018, 2019, 2020

<sup>1</sup>Data Report Reviews are due 30 days after receipt of each data report from MWRA.

<sup>2</sup>Outfall Faunal Sorting Completion Letter Report is due 60 days after survey completion.



## A7. QUALITY OBJECTIVES AND CRITERIA

Requirements for ensuring that the data are fit for their intended use (that is, are of suitable quality) include accuracy, precision, representativeness, comparability, and completeness. When these requirements are met, the final data product is technically defensible. Data elements for this project are discussed in terms of the appropriate characteristics, defined as:

<b>Accuracy:</b>	The extent of agreement between a measured value and the true value of interest.
<b>Precision:</b>	The extent of mutual agreement among independent, similar, or related measurements.
<b>Representativeness:</b>	The extent to which measurements represent true systems.
<b>Comparability:</b>	The extent to which data from one study can be compared directly to similar studies.
<b>Completeness:</b>	The measure of the amount of data acquired versus the amount of data required to fulfill the statistical criteria for the intended use of the data.

The representativeness and comparability of all the data generated under this QAPP depend to some extent upon the selection of the sampling sites. All sampling sites to be visited during this program are established sites that have been sampled in previous years (Nestler et al. 2014).

Quality objectives are given below. Details of how these criteria are met for each component of the Benthic Monitoring tasks are presented in Section B5.

### A7.1 Field Activities

#### A7.1.1 Navigation

The quality objective for navigation is that the system used be accurate and precise to enable the sampling vessel to reliably re-occupy those stations that are to be sampled during each survey. Navigation equipment should be suitable for consistently fixing the vessel's position to within 10 meters. Samples will be collected within a target radius of 30 meters.

#### A7.1.2 Grab Sampling

The quality objectives for collection of sediment grab samples are that (1) samples be collected within 30 meters of the target location, (2) all samples required be collected, (3) samples be of sufficient quantity to be representative of the station, (4) samples be undisturbed, and (5) samples be uncontaminated.

The determination of sufficient quantity is made by measuring the depth of penetration of the grab. The 0.04-m<sup>2</sup> Ted Young-modified van Veen grab sampler used for biology samples must contain sediment to a depth of at least 7 cm (out of a possible 10 cm). The 0.1-m<sup>2</sup> Ted Young-modified van Veen grab sampler used to collect sediment for chemical analysis must be at least half full to contain enough sediment for distribution among the several required sample jars. Procedures for collecting undisturbed and uncontaminated samples are described in Section B3.

The quality objectives for the handling of benthic infaunal samples are that (1) samples be handled gently during the sieving process, (2) samples be fixed in 10% formalin as quickly as possible to prevent deterioration of the fauna, and (3) sample jars be labeled accurately. Procedures for sample handling are detailed in Section B3.

The quality objectives for the handling of sediment samples to be used for sedimentary and chemical analysis are that (1) samples remain uncontaminated, (2) samples be well homogenized, and (3) samples be subsampled and preserved following methods detailed in Section B3.

All sediment samples analyzed during the current HOM contract will be analyzed by the MWRA's DLS. The data quality objectives (DQOs) for the DLS are provided in Constantino et al. (2014), and updates as issued by DLS.

#### **A7.1.3 *Sediment Profile Imagery***

The DQOs for the field collection of the SPI are that (1) images be collected from the same locations that have been sampled in previous surveys, and (2) images be clear and of high quality.

#### **A7.1.4 *Hard-bottom ROV Survey***

The DQOs for the field collection of the hard-bottom survey are that (1) surveyed transects and stations be the same as those that have been sampled in previous surveys, and (2) that images be clear and of high quality.

### **A7.2 *Laboratory Activities***

#### **A7.2.1 *Infaunal Analysis***

The DQOs for the analysis of benthic infauna are that (1) all samples be processed, (2) all animals be removed from the sediment for identification and enumeration, (3) all infaunal animals be counted accurately, (4) the taxonomic identifications be accurate (correct), and (5) the identifications correspond to those used throughout the monitoring program. At least 95 percent of all animals must be removed from a sample to pass the quality control (QC) evaluation as discussed in Section B5.

#### **A7.2.2 *Sediment Profile Image Analysis***

The QC objectives for SPI analysis are that (1) at least three images from each station be analyzed, (2) all parameters defined in this QAPP be analyzed for all images, and (3) that analytical systems used enable repeatable measurements and determinations to be made. Accuracy and precision for SPI analysis cannot be quantified but will be optimized by QC procedures discussed in Section B5.

#### **A7.2.3 *Hard-bottom Video Analysis***

The DQOs for analysis of hard-bottom videos are that (1) the required minutes of video footage (20 minutes) be analyzed for each station, and (2) all parameters defined in this QAPP be counted and/or measured as appropriate.

## **A8. SPECIAL TRAINING/CERTIFICATIONS**

### **A8.1 *Special Training***

Field personnel will be experienced in the sampling techniques documented in this QAPP. Prior to starting work, any new personnel will be given instructions specific to the project, covering the following areas:

- Organization and lines of communication and authority
- Overview of the QAPP
- QA/QC requirements
- Documentation requirements

- Health and safety requirements

Instructions will be provided and documented by the Normandeau Program Manager, the Normandeau Chief Scientist, and the Normandeau Project QA/ Health and Safety Officer.

Personnel responsible for shipping samples will also be trained in the appropriate regulations, i.e., Department of Transportation (DOT), International Civil Aviation Organization (ICAO), and International Air Transport Association (IATA).

## **A8.2 Certifications**

No special certifications are required for the work covered under this QAPP.

## **A9. DOCUMENTS AND RECORDS**

### **A9.1 Documentation**

Initially, all data will be recorded either (1) electronically onto computer storage media or (2) manually into bound laboratory notebooks or onto established data forms. All data collection notes will be made in permanent ink, initialed, and dated, and no erasures or obliterations will be made. If an incorrect entry is made, the information will be crossed out with a single strike mark and the correct entry will be made, initialed, and dated by the person making the correction. Corrections to electronically captured data will be documented on a hard-copy of the data. Completed data forms or other types of hand-entered data will be signed and dated by the individual entering the data. Direct-entry and electronic data entries will indicate the person collecting or entering the data. It will be the responsibility of the laboratory managers to ensure that all data entries and hand calculations are verified according to the procedures described in Sections D1 and D2 of this QAPP.

### **A9.2 Field Records**

Field logbooks or data forms will provide the primary means of recording the data collection activities performed during the sampling surveys. As such, entries will be described in as much detail as possible so that events occurring during the survey can readily be reconstructed after the fact. At the beginning of each survey, the date, start time, weather, and names of all sampling team members present will be entered (see Survey Log Form, Appendix B). Measurements made and samples collected will be recorded on pre-printed Station Log Forms for grab samples (see Section B3.2.1), and electronically for the SPI and hard-bottom surveys.

Information specific to sample collection will include:

- Station name
- Sample identification number
- Time and date of sample collection
- Sample description (color, texture, etc.)
- Samplers' initials
- Requested analyses
- Location (the geographic location where a sample is collected)

Supplementary data for every station sampled during the soft-bottom and hard-bottom field surveys may be recorded in the comments section of the field data forms. For the soft-bottom survey, additional data may include notes on presence/absence of anemones, and numbers and sizes of jars used for each sample. For the hard-bottom survey, additional data may include notes on sampling difficulties, currents, and video observations.

The Windows™-based software, HYPACK™, will be used to capture vessel start and finish positions at each hard-bottom survey location. These coordinates will also be entered manually on a hard-copy field log as a back-up.

For the SPI field program, data will be entered into an Excel spreadsheet on a laptop computer as the images are acquired. Data logged include station, date, time, sampling coordinates, number of replicates, water depth, and comments. This spreadsheet will be archived at Diaz & Daughters under the supervision of Dr. Robert Diaz, and a copy will be provided to the Normandeau Chief Scientist to complete the survey logbook.

### **A9.3 Laboratory Records and Deliverables**

Laboratory data reduction procedures will be performed according to the following protocol. All information related to analysis will be documented in controlled laboratory logbooks, instrument printouts, or other approved forms. All entries that are not generated by an automated data system will be made neatly and legibly in permanent, waterproof ink. Information will not be erased or obliterated. Corrections will be made by drawing a single line through the error and entering the correct information adjacent to the cross-out. All changes will be initialed, dated, and, if appropriate, accompanied by a brief explanation. Unused pages or portions of pages will be crossed out to prevent future data entry. Analytical laboratory records will be reviewed by the supervisory personnel on a regular basis, and by the Laboratory QA Manager periodically, to verify adherence to documentation requirements.

Cove Corporation, Ocean's Taxonomic Services, Hecker Environmental, and Diaz & Daughters will submit data to Normandeau as electronic data deliverables (EDD). Cove Corporation will also provide copies of any hand-written data sheets. The EDDs for oligochaetes (Ocean's Taxonomic Services) and for other benthic infauna (Cove Corporation) identified under the benthic infauna tasks will be provided in Excel spreadsheets. Hecker Environmental will provide an Excel spreadsheet of habitat and biotic characteristics of each of the 23 hard-bottom stations. Diaz & Daughters will provide two versions of the SPI data in Excel. The first will be the original data produced by Diaz & Daughters' image analysis system. The second will be reformatted according to Normandeau's instructions for loading into Excel. Normandeau will use the original output to ensure that the resulting files for upload to the HOML database are correct.

Data deliverables will be provided to MWRA by Normandeau on the schedule described in this QAPP (Section A6.3). Details of data management are discussed in Section B10.

Sample laboratory data recording forms are provided in Appendix B.

### **A9.4 Reports and Data Submissions**

Documents and data submissions and reviews that will be generated under the Benthic Monitoring tasks are listed below. The due dates for these reports and data submissions are tabulated in Section A6.3.

- QAPP
- Survey plans

- Survey summaries
- Survey reports
- Reference collection reports
- Sample analysis data submissions
- Review of MWRA generated data reports
- Summary reports

#### **A9.4.1 Quality Assurance Project Plan (QAPP)**

The QAPP will be the first document produced during the Benthic Monitoring program and will be organized in the format documented in U.S. EPA QA/R-5 (2001, reissued 2006) and further elucidated in U.S. EPA QA/G-5 (2002). Copies, either electronic or hardcopy, of this QAPP, and any subsequent revisions, will be distributed by the Normandeau QA Officer or the officer's designee to the personnel shown on the Distribution List (section A3 of this document). The version number is given in the header.

#### **A9.4.2 Survey Plans**

Survey plans will be prepared for each survey conducted. In the case of combined surveys, a single plan covering all aspects of the combined surveys will be submitted to MWRA. Each survey plan will be submitted electronically at least one week prior to the start of the survey.

Each survey plan will include the following information:

- General information
- Schedule of operations
- Background information
- Justifications and rationale
- Objectives
- Environmental management questions asked by the survey
- Specific location and coordinates of each station
- Survey/sampling methods
- Sample handling and custody
- Sequence of tasks and events
- Navigation and positioning control
- Vessel, equipment, and supplies
- QA/QC procedures
- Documentation procedures
- Scientific party
- Reporting requirements
- Safety procedures
- Documentation of any deviations from this QAPP

#### **A9.4.3 Survey Summaries**

For the nearfield faunal sampling and SPI surveys only, an e-mail summary will be delivered to the MWRA Task Manager within one week of survey completion. The nearfield infaunal survey summary will confirm completion of the survey and mention any noteworthy problems or events encountered. This summary will highlight any unusual observations that may be a cause for concern; for example, if it is observed that some stations have little or no apparent RPD. The SPI survey summary will contain the above information and will also include a preliminary review of the images obtained.

#### **A9.4.4 Survey Reports**

Survey reports are prepared after each survey to describe the sampling activities. Each report is expected to include about 4–5 pages of text, and will contain the following information:

- Introduction with overview of the survey, including the vessel, schedule, and a table of survey personnel (including roles and responsibilities)
- Methods for observations and sample collection
- Survey chronology using local time
- Survey results presented as a narrative and including:
  - Any incidental observations of marine mammals
  - Any unusual observations of environmental conditions (especially those that might impact subsequent testing of Contingency Plan Thresholds)
  - Table of actual vs. planned samples and measurements collected
  - Table of summary data (outlined for soft-bottom infaunal survey below)
  - Table of samples collected (table generated by MWRA as described below)
  - Map illustrating the actual station locations and track lines
- Problems experienced, actions taken, and recommendations, including deviations from this QAPP, that were not known at the time of survey plan preparation
- References

All survey reports will include a station data table containing information specific to each individual survey (including, but not limited to, survey\_ID, survey date, sampling times, sample types, sample locations, etc.). This survey report table will be generated by MWRA from the EM&MS database once the relevant survey data submission meets the quality assurance criteria described in Section B5. For the soft-bottom infaunal survey, a supplementary table will include descriptive field measurements such as sediment texture, observed surface fauna, and apparent RPD depth measurements that are not included in the database.

The draft survey report will be submitted to MWRA no later than four weeks after the completion of each survey. MWRA's comments will be due two weeks after receipt of the draft report. The final survey report, in which MWRA's comments are addressed, will be due two weeks after receipt of the comments. If MWRA does not submit comments within the two-week period, the draft survey report will be considered final.

#### **A9.4.5 Reference Collection Status Report**

In June 2018, 2019, and 2020 after MWRA accepts all infaunal data submissions and Normandeau has reviewed all resultant reports from the prior year's sampling, a reference collection status report will be prepared. The report, in letter format, will include:

- A hierarchical taxonomic list of all taxa comprising the collection, including the MWRA station ID from which the specimen came
- The current species code for all taxa from the EM&MS database
- Identification of the staff with custody of parts of the collection
- Any new taxa identified in the previous year's samples
- Any taxonomic changes to previously identified taxa and a justification for the change

#### **A9.4.6 Sample Analysis Data Submissions**

Normandeau will process all benthic sample analysis data into the appropriate MWRA HOM Data Loading (HOML) application format as defined in the contract. Processing of data will be done using SAS software and will include error checking, and checks to ensure that data sets meet MWRA's database format specifications, code requirements, business rules, and database constraints. Data will be exported from SAS into ASCII-delimited files as defined by MWRA and uploaded into the MWRA database using the HOML application.

The appropriate documentation (e.g., cover letter, Quality Assurance Statement, etc.), as per contract requirements for data set submissions, will be delivered to MWRA following the successful loading of data via HOML.

The infaunal data submissions will include tables showing the station, sample\_ID, taxon name, and the number of individuals counted for each taxon. The SPI analysis data submissions will be accompanied by copies of the three images that were analyzed from each site. The hard-bottom video analysis data submissions will be accompanied by copies of the videotapes and photographic images taken during the survey.

#### **A9.4.7 Review of MWRA Generated Data Reports**

The data reports generated by the MWRA will be reviewed by Mr. Nestler or his designee at Normandeau and any errors will be reported to MWRA within 30 days after receipt of each data report.

#### **A9.4.8 Summary Reports**

Annual summary reports for Outfall and Harbor benthic monitoring will be based on the materials presented at the annual technical meetings; copies of the full presentations will be included as appendices. The due dates for the draft and final summary reports are listed in Section A6.3.

All project data used in these reports will be derived from the MWRA EM&MS database. MWRA will provide Normandeau with data generated by MWRA's DLS (sediment chemistry and microbiological parameters), along with the data generated by Normandeau and subcontractors.

##### **A9.4.8.1 Outfall Benthic Report**

The summary report will evaluate the status of benthic communities and associated sediment and chemical parameters in the nearfield and farfield of Massachusetts Bay and will focus on results indicative of changes in the benthic environment.

The technical content of the report will describe the annual monitoring results and, in a limited manner, will provide comparisons with previous years. Topics will include physico-chemical parameters, SPI, soft-bottom infauna, and hard-bottom fauna. These monitoring questions will be specifically addressed:

- *What was the level of sewage contamination and its spatial distribution in Massachusetts and Cape Cod<sup>1</sup> Bays sediments before discharge through the new outfall?*
- *Has the level of sewage contamination or its spatial distribution in Massachusetts and Cape Cod<sup>1</sup> Bays sediments changed after discharge through the new outfall?*
- *Have the concentrations of contaminants in sediments changed?*
- *Have the sediments become more anoxic; that is, has the thickness of the sediment oxic layer decreased?*
- *Has the soft-bottom community changed?*
- *Are any benthic community changes correlated with changes in levels of toxic contaminants (or sewage tracers) in sediments?*
- *Has the hard-bottom community changed?*

<sup>1</sup>Following revisions to the Ambient Monitoring Plan in July 2010 (MWRA 2010), ongoing monitoring no longer includes benthic sampling in Cape Cod Bay.

#### ***A9.4.8.1.1 Statistical Analyses for Sedimentary and Chemistry Data***

The sediment data will be analyzed using a variety of statistical and graphical methods. Data analyses will be employed to detect outfall effects if present. Various univariate and multivariate analyses may be employed using SAS, PRIMER v. 6, or other standard statistical/graphics packages. These tests may include analysis of variance (ANOVA), correlation analyses, or regression analyses. Additional evaluations may assess temporal and spatial trends in sediment data as compared to faunal distributions.

#### ***A9.4.8.1.2 SPI Analyses***

A variety of statistical analyses may be used to compare SPI parameters and to display temporal variations. Analysis of variance (ANOVA) or Student's t-test for paired data may be used to test for differences between and within areas for quantitative parameters. Normality will be checked with the Shapiro-Wilk test and homogeneity of variance with Bartlett's test. If variance is not homogeneous, Welch analysis of variance, which allows standard deviations to be unequal, may be used in testing for mean differences (Zar 1999). Cochran-Mantel-Haenszel statistics and Fisher Exact Test may be used for comparisons involving categorical parameters (Agresti 1990). Statistical tests will be conducted using SAS.

#### ***A9.4.8.1.3 Infaunal Data Analyses***

Prior to analysis of the soft-bottom faunal data, some modifications to the dataset will be made. For example, some taxa, e.g., epifaunal, encrusting, or non-benthic taxa, may be eliminated from all calculations. Other taxa may be included in calculations of abundance but not diversity; such taxa are usually those infaunal organisms that cannot be identified to species level. Only those individuals identified to species level will be included in all remaining calculations (e.g., diversity, evenness, number of species, multivariate analyses).

Three categories of diversity indices may be calculated: (1) species richness indices (e.g., rarefaction); (2) indices based on the proportional abundances of species (e.g., Shannon index) and (3) species abundance indices (e.g., Fisher's log-series *alpha*) (Magurran 1988). The PRIMER v. 6 packages of statistical routines will be used to calculate these indices (Clarke and Gorley 2006).

Multivariate analysis may be used to explore the data for evidence of impact of the outfall in Massachusetts Bay. Cluster and Non-metric multidimensional scaling analyses may be conducted in a limited manner to assess spatial and temporal trends in community composition. Changes in infaunal community structure that are suspected to be due to the outfall may be assessed by comparing community



structure differences between the nearfield and farfield through time, and evaluating changes in community structure before and after the outfall went online in September 2000.

#### ***A9.4.8.1.4 Hard-bottom Data Analyses***

In previous reports, data reduction and analysis of the hard-bottom results has focused on several goals: (1) to obtain baseline spatial and temporal data on habitat characteristics at each waypoint, (2) to assess temporal stability of community structure at each of the waypoints, (3) to assess temporal variability in percent cover of coralline algae at each of the waypoints, and (4) to evaluate if observed changes, if any, in biotic parameters can be attributed to discharges from the outfall. Included in previous reports has been a determination of habitat types, summary distributions of the flora and fauna observed, and a multivariate analysis of the hard-bottom community structure. Data analysis products have included descriptions of habitat characteristics, species lists, hierarchical classification analysis, and descriptive multi-year comparisons in map and table form.

Analysis of the 2017 hard-bottom data will include a general comparison of pre- and post-diversion conditions of general community characteristics. Twenty minutes of video will be reviewed for each waypoint. Additional statistical treatments of the data may be implemented.

#### ***A9.4.8.2 Harbor Benthic Report***

The analysis of the harbor sediment, SPI, and infaunal data will be focused on characterizing the benthos based on the most recent year's data, and evaluating long-term trends. Various univariate and multivariate analyses may be employed using SAS, PRIMER v. 6, or other standard statistical/graphics packages.

The annual synthesis reports will briefly summarize the results from the year's studies and provide comparisons with results from previous years. Specific objectives for the harbor benthic report are to:

- Evaluate the most recent year's data from Boston Harbor
- Compare current results with historical data with the objective of evaluating long-term trends in benthic community parameters and faunal assemblages. Data may be evaluated according to time periods corresponding to various levels of pollution abatement in Boston Harbor (e.g., Taylor 2005, 2006).

### **A9.5 Project files**

The project files will be the central repository for all documents relevant to sampling and analysis activities as described in this QAPP, except for those relating to sediment chemistry: MWRA's DLS will be responsible for sediment chemistry records. Normandeau is the custodian of the project files and will maintain the contents of the project files, including all relevant records, reports, logs, field notebooks, pictures, subcontractor reports, and data reviews in a secured, limited access area and under custody of the Normandeau Program Manager.

The project files will contain at a minimum:

- Field and laboratory data forms, and logs
- Survey plans and reports
- Laboratory data deliverables
- Data quality assurance reports
- Data submissions and reports

- Reference collection report
- Summary reports
- Progress reports, interim project reports, etc
- All custody documentation (chain of custody forms, air bills, etc.)

Electronic versions of correspondence, reports, and statistical analyses will be stored in the project-specific network file. The original EDDs received from the laboratories and the project data will also be stored on the network, which is backed up daily and periodically archived off-site. Records associated with the current HOM contract will be retained with all the project records for at least six years after the termination of the project.

## B. DATA GENERATION AND ACQUISITION

### B1. SAMPLING PROCESS DESIGN (EXPERIMENTAL DESIGN)

The rationale for the design of the harbor and outfall studies is given in section A6. The harbor study (A6.1) is designed to document any long-term changes in the benthic communities and sediment parameters at a variety of locations after the cessation of sludge and effluent discharge. The outfall study (A6.2) is designed to measure any potential impacts on soft- and hard-bottom communities, as well as sedimentary parameters and incidence of *Clostridium perfringens*, as a result of moving the discharge offshore.

A summary of the types and numbers of field samples to be collected in Boston Harbor and in Massachusetts and Cape Cod Bays during this project is given in Table 8. The numbers of stations visited and samples collected are listed separately for each sample type and survey.

Samples for laboratory measurements of sedimentary properties, such as grain size, levels of contaminants, and levels of *Clostridium perfringens* spores, will be collected but not analyzed under this contract; those samples will be delivered to MWRA's DLS for analysis.

### B2. SAMPLING METHODS

#### B2.1 Navigation

Normandeau's GPS navigation system (Simrad NSS7 Evo2) will be used to acquire navigation data for soft-bottom benthic surveys. Sampling will be conducted within 30 meters of the target locations as determined by Normandeau's GPS ( $\pm 7$  meter accuracy), and the navigation data will be recorded on field station data forms (hard-copy or in Excel). Coordinates at the location of each sediment grab sample will be recorded on the hard-copy field station log. Coordinates at the location of each sediment profile image (SPI) sample will be entered into the field station log in Excel.

For both SPI and grab samples, a waypoint will be entered into the shipboard GPS when a sample is collected. The marker set for each waypoint will be named as the station name, with the replicate number appended. Waypoints will be stored separately for the SPI and grab surveys. A QC check of waypoints against the recorded coordinates will be done after each sample is collected. Waypoints will be stored on the shipboard GPS until data checking confirms that all samples were collected within 30 meters of the target station location. Any sample coordinates found through data checking to be outside of the 30-meter station radius will be compared against the sample coordinates for the stored waypoint. Thus, if an incorrect waypoint is identified through data checking, the hand-entered data will be compared to the electronic waypoint on the GPS, and any error discovered in the navigational data will be corrected as necessary.

During the hard-bottom reconnaissance surveys, a GPS navigation system and an ORE International LXT Underwater Positioning System will be used for positioning the vessel and the ROV. The Windows™-based software, HYPACK™, will be used to integrate these positioning data and provide real-time navigation, including the position and heading of the vessel and the position of the ROV relative to the vessel. Vessel start and finish positions at each hard-bottom survey location will be captured electronically using HYPACK™. These coordinates will also be entered manually on a hard-copy field log as a back-up.

## **B2.2 Benthic Sample Collection/Shipboard Processing**

Appropriate permits to allow sampling within the Stellwagen Bank National Marine Sanctuary will be requested by MWRA Project Manager Kenneth Keay; a copy will be provided to the Chief Scientist prior to the survey.

The shipboard processing and storage requirements for all samples collected for the benthic monitoring tasks are listed in Table 9 (harbor benthic surveys) and Table 10 (outfall benthic surveys). At all stations, the station coordinates, time, sea state and other weather conditions, and water depth will be recorded by hand onto a field station data form. DLS provides sample containers for chemistry samples; Normandeau provides sample containers for biology samples.

Any incidental observations of marine mammals will be recorded in the log or on data forms. Field operations for the benthic surveys will adhere to NOAA Fisheries (NMFS) regulations to reduce collisions between ships and the critically endangered North Atlantic right whale (50 CFR 224.103 (c), and <http://www.nero.noaa.gov/Protected/mmp/viewing/regs/>). During transit between stations, the captain and crew will maintain a careful lookout for vessels and marine mammals. As required of all vessels by NMFS's rules, the vessel will maintain a minimum distance of 500 yards from right whales. Although reporting of sightings of healthy right whales is voluntary for all vessels, reasonable effort will be made to report sightings within 12 hours by calling 866-755-6622, which reaches the North Atlantic Right Whale Sighting Advisory System (<http://www.nefsc.noaa.gov/psb/surveys/SAS.html>). If a right whale is found within 500 yards from a benthic sampling station, the crew will either wait until the whale leaves the area, or sample an alternate station before returning to collect the necessary samples. If waiting for a right whale to leave the sampling area becomes infeasible, the crew will contact MWRA's project manager, Ken Keay, for guidance on how to proceed.

**Table 8. Number of Stations to be Visited and Samples per Station to be Collected each Year by Survey and Sample Type.**

	Harbor Surveys (Task 5)		Outfall Surveys (Task 6)			
			Nearfield		Farfield	
Sample Type	Stations	Samples	Stations	Samples	Stations	Samples
Infauna (2017, 2018, 2019)	9	3	11	2	3	2
Sediment Chemistry (2017) • Organics • Metals			• 11 • 11	• 1 • 1	• 3 • 3	• 1 • 1
Ancillary Parameters (2017, 2018, 2019) • TOC • Grain size • <i>Clostridium perfringens</i>	• 9 • 9 • 9	• 1 • 1 • 1	• 11 • 11 • 11	• 1 • 1 • 1	• 3 • 3 • 3	• 1 • 1 • 1
SPI (2017, 2018, 2019)	61	3	23	3		
Hard-bottom (2017)			23	20 min. of video		

**Table 9. Processing and Storage of Field Samples taken on Boston Harbor Benthic Surveys.**

Activity	Task 5.1 Harbor Infaunal Survey	Task 5.2 Harbor Reconnaissance Survey (SPI)
Stations	9 (T01–T08 and C019, see Table 2)	61 ( T01–T08, C019, R02–R53, see Table 2)
Station location and time	Record beginning and ending location and time of station visit, and location of individual samples	Record beginning and ending location and time of station visit
Weather/sea state/ bottom depth	Record general conditions; record bottom depth to nearest 0.5 m	As for Task 5.1
Marine mammals	Note incidental observations	As for Task 5.1
Sampling: Gear	0.04-m <sup>2</sup> Ted Young-modified van Veen grab sampler	Sediment profile camera
Sampling: Measurements	Record penetration depth to nearest 0.5 cm and sediment volume to nearest 0.5 L	Record prism penetration (1 cm)
Sampling: Sediment texture	Describe qualitatively	Estimate from images (see Section B4.2)
Sampling: aRPD depth	Record visual estimate of aRPD to nearest 0.5 cm	Visual estimate
Faunal Samples: Number	3 at each station	3 images at each station
Faunal Samples: Processing	Rinse over 300-µm-mesh sieve; fix in 10% buffered formalin	Check memory card for images
Faunal Samples: Storage	Clean, labeled plastic jars; ambient temperature	NA
Chemistry (Ancillary) /Microbiology Samples (All): Number	1 at each station	NA
Chemistry Samples (Ancillary): Processing	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize and collect ~50 mL subsample for TOC and ~500 mL for grain size	NA
Chemistry Samples (Ancillary): Storage <sup>1</sup>	Clean, labeled glass jar. Freeze TOC at -20°C; refrigerate grain size. Holding time is 28 days for both TOC and grain size.	NA
Microbiology Samples: Processing	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize and collect ~25 mL subsample	NA
Microbiology Samples: Storage <sup>1</sup>	Sterile sample bottle; refrigerate at 4°C. <sup>2</sup> Holding time not defined.	NA

<sup>1</sup> Sediment samples will be delivered to MWRA’s Department of Laboratory Services (DLS) for testing. The analysis of certain parameters may be performed by contracted laboratories as detailed in Constantino et al. (2014), and updates as issued by DLS.

<sup>2</sup> *C. perfringens* may be stored frozen, but then must not be thawed until analyses are performed.

**Table 10. Field Processing and Storage of Samples taken on Outfall Benthic Surveys.**

Activity	Nearfield Benthic Survey (Task 6.1)	Farfield Benthic Survey (Task 6.1)	Nearfield SPI Survey (Task 6.2)	Nearfield Hard-bottom Survey (Task 6.3)
Stations	11 (Table 3)	3 (Table 3)	23 (Table 3)	18 waypoints on 6 transects ( T1, T2, T4, T6, T7, T8) plus 5 single waypoints: T9, T10, T11, T12, diffuser #44 (Table 4)
Station location and time	Record beginning and ending location and time of station visit and location of individual samples	Record beginning and ending location and time of station visit and location of individual samples	Record beginning and ending location and time of station visit	Record beginning and ending location and time of station visit
Weather/sea state/ bottom depth	Record general conditions; record bottom depth to nearest 0.5 m	Record general conditions; record bottom depth to nearest 0.5 m	Record general conditions; record bottom depth to nearest 0.5 m	Record general conditions; record bottom depth to nearest 0.5 m
Marine mammals	Note incidental observations	Note incidental observations	Note incidental observations	Note incidental observations
Sampling: Gear	Ted Young-modified van Veen grab sampler	Ted Young-modified van Veen grab sampler	Digital sediment profile camera	ROV equipped with video camera
Sampling: Measurements	Record penetration to nearest 0.5 cm and sediment volume to nearest 0.5 L	Record penetration to nearest 0.5 cm and sediment volume to nearest 0.5 L	Record prism penetration	Record ROV position, depth, heading
Sampling: Sediment texture	Describe qualitatively	Describe qualitatively	Estimate from images (see Section B2.2.3)	Not Applicable (NA)
Sampling: apparent RPD depth	Record visual estimate (0.5 cm)	Record visual estimate (0.5 cm)	Estimate from images (see Section B2.2.3)	NA
Faunal Samples/Images: Number	2 at each station	2 at each station	3 at each station	20 min video analog and digital per waypoint
Faunal Samples/Images: Processing	Rinse over 300- $\mu$ m-mesh sieve; fix in 10% buffered formalin	Rinse over 300- $\mu$ m-mesh sieve; fix in 10% buffered formalin	Preview images within 3 business days of survey completion (see section B2.2.3)	Analog video saved to DVD Digital video save to external hard drive.
Faunal Samples/Images: Storage	Clean, labeled plastic jar; ambient temperature	Clean, labeled plastic jar; ambient temperature	CD	DVD
Chemistry/ microbiology Samples: Number	1 at each station	1 at each station	NA	NA

**Table 10. (continued)**

Activity	Nearfield Benthic Survey (Task 6.1)	Farfield Benthic Survey (Task 6.1)	Nearfield SPI Survey (Task 6.2)	Nearfield Hard-bottom Survey (Task 6.3)
Chemistry Samples (Organics): Processing	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize and collect ~125 mL subsample	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize and collect ~125 mL subsample	NA	NA
Chemistry Samples (Organics): Storage <sup>1</sup>	Clean labeled 250 ml (8 oz) glass jar with Teflon-lined screw cap; freeze (-20° C); holding time is 1 year to extract (if samples are frozen) and 40 days from extraction to analysis	Clean labeled 250 ml (8 oz) glass jar with Teflon-lined screw cap; freeze (-20° C); holding time is 1 year to extract (if samples are frozen) and 40 days from extraction to analysis	NA	NA
Chemistry Samples (Metals): Processing	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize and collect ~100 mL subsample	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize and collect ~100 mL subsample	NA	NA
Chemistry Samples (Metals): Storage <sup>1</sup>	Clean, 125 ml (4 oz. plastic labeled I-Chem© jar; freeze (-20° C); holding time is 6 months to preparation; Hg holding time is 28 days to preparation.	Clean, 125 ml (4 oz. plastic labeled I-Chem© jar; freeze (-20° C); holding time is 6 months to preparation; Hg holding time is 28 days to preparation.	NA	NA
Chemistry Samples (Ancillary): Processing	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize, and collect ~50 mL subsample for TOC and ~500 mL for grain size.	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize, and collect ~50 mL subsample for TOC and ~500 mL for grain size.	NA	NA
Chemistry Samples (Ancillary): Storage <sup>1</sup>	Clean, labeled, wide-mouth glass jar (125 ml (4 oz) for TOC and 500 ml (16 oz) for grain size); freeze TOC, refrigerate grain size. Holding time is 28 days for both TOC and grain size	Clean, labeled, wide-mouth glass jar (125 ml (4 oz) for TOC and 500 ml (16 oz) for grain size); freeze TOC, refrigerate grain size. Holding time is 28 days for both TOC and grain size	NA	NA
Microbiology Samples: Processing	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize and collect ~25 mL subsample	Use Kynar-coated scoop to collect upper 0–2 cm from grab, homogenize and collect ~25 mL subsample	NA	NA
Microbiology Samples: Storage <sup>1</sup>	Sterile sample bottle; refrigerate at 4°C <sup>2</sup> , holding time not defined.	Sterile sample bottle; refrigerate at 4°C <sup>2</sup> , holding time not defined.	NA	NA

<sup>1</sup>Sediment samples will be delivered to MWRA’s Department of Laboratory Services (DLS) for testing. The analysis of certain parameters may be performed by contracted laboratories as detailed in Constantino et al. (2014), and updates as issued by DLS.

<sup>2</sup>C. *perfringens* may be stored frozen, but then must not be thawed until analyses are performed.



### **B2.2.1 Grab Sample Collection**

A 0.04-m<sup>2</sup> Ted Young-modified van Veen grab sampler will be used to collect soft-bottom sediment samples for infaunal analysis. The 0.04-m<sup>2</sup> grab may also be used to collect samples for TOC, grain size, and microbiology, as long as sufficient sample volume can be obtained. A Kynar-coated 0.1-m<sup>2</sup> Ted Young-modified van Veen grab sampler will be used to collect all soft-bottom sediment samples for chemical analyses (organic and inorganic). The numbers of grab samples to be collected at each station for macrofaunal and/or chemical analyses are listed in Tables 8, 9, and 10.

Once the survey vessel is on station and coordinates have been verified, the sediment grab will be deployed. When slack in the winch wire indicates that the grab is on the bottom, the grab and captured sample will be brought back to the surface. Upon retrieval of the grab, the sample will be inspected for acceptability (see Section A7.1.2). If the sample is unacceptable, the grab will be emptied, rinsed, and redeployed.

If the sample is acceptable, the penetration depth, sediment volume, sediment texture, and depth of the aRPD will be visually estimated. The aRPD depth will be estimated, initially, by examining the sediment surface. If the surface of the grab sample is black, with few or no infaunal organisms visible, and an odor of hydrogen sulfide is detected, then the sample has no measurable aRPD layer and is considered to be anoxic. If the surface is oxidized, a clear, plastic ruler marked in millimeters will be pushed into the sediment and pulled out toward the investigator. This action creates a vertical profile that can be examined and allows the aRPD to be measured to the nearest millimeter. Alternatively, the same ruler may be used to gently scrape off the surface layers, in millimeter fractions, until the gray-to-black anoxic sediment layer is exposed. The distance from the surface to the uppermost portion of the gray-to-black subsurface sediments is the depth of the aRPD. Both methods will be used on the MWRA biological sampling cruises to estimate aRPD depths. Any sediment adhering to the surface of the ruler will be rinsed back into the grab for processing with the remainder of the sample. The volume of the grab will be estimated by comparing the measured penetration depth with a prepared table of penetration depths versus grab volumes (Table 11). These data will be recorded in the field log.

For the infaunal samples only, after these measurements are taken, the grab will be placed over a bucket, the jaws opened, and the sample emptied into the bucket. Filtered seawater will be used to gently wash the sample into the bucket. Once thoroughly washed (if necessary), the grab will be redeployed until the required numbers of acceptable samples have been obtained for infaunal analysis.

Precautions will be taken during the deployment and retrieval of the grab sampler to prevent contamination of samples between stations. Sampling for infauna, TOC, and grain size determinations require that the grab and associated sampling equipment be washed and rinsed with soap and ambient seawater. Samples taken for *C. perfringens* require an additional rinse of the grab sampler with ethanol. To remove organic contaminants for samples collected for chemical analyses, the grab and associated sampling equipment must be cleaned with soap and water, and then rinsed with acetone, and methylene chloride (DCM). On deck, a metal pan is placed under the grab to collect residual acetone and methylene chloride. Any liquid wastes resulting from the latter two rinses will be collected in appropriate containers for proper disposal. Before the grab is retrieved, the vessel must be positioned so that the engine exhaust will not contaminate the sample when it has been brought on deck.

**Table 11. Values used to convert Grab Penetration Depth to Sediment Volume.**

Grab Penetration Depth (cm) <sup>1</sup>	Sediment Volume (L) 0.04-m <sup>2</sup> Grab	Sediment Volume (L) 0.10-m <sup>2</sup> Grab
4.1-5.0	1.4	3.6
5.1-6.0	1.8	4.4
6.1-7.0	2.1	5.2
7.1-8.0	2.4	6.0
8.1-9.0	2.7	6.8
9.1-10.0	3.0	7.6
10.1-11.0		8.4
11.1-12.0		9.2
12.1-13.0		10.0
13.1-14.0		10.8
14.1-15.0		11.6

<sup>1</sup>Over penetration is > 9.5 cm for 0.04-m<sup>2</sup> grab and > 15 cm for 0.1-m<sup>2</sup> grab.

### **B2.2.2 Grab Sample Shipboard Processing**

At harbor grab stations and at all outfall stations, grab samples for infaunal analyses will be rinsed with 50-µm-filtered seawater through 300-µm-mesh sieves. The portion retained on the screens will be transferred to labeled jars and fixed in 10% buffered formalin. Sample jars will be Nalgene or other sturdy plastic jars with screw-capped lids. Each sample jar will be filled no more than half full of material. The jar will be gently turned around on its side to distribute the formalin evenly throughout the sample. The technician sieving each sample will be identified by his or her initials in the survey log. Sieves will be washed between samples.

If the grab sample to be used for chemical analyses meets the acceptability criteria, the water overlying the sample will be siphoned from the grab and the surface sediment (0 to 2 cm) will be collected with a Kynar-coated scoop and transferred to a clean (rinsed with filtered water, acetone, and methylene chloride) glass bowl. The sediment will be thoroughly homogenized before being transferred to appropriate storage containers. About 125 mL of sediment for organic compound analysis will be placed into a clean, wide-mouth 250 mL (8 oz) glass jar with a Teflon-lined screw cap. About 100 mL of sample for metals analysis will be placed into an acid-cleaned, plastic, 125 mL (4 oz) I-Chem<sup>®</sup> jar (Constantino et al. 2014). Approximately 50- and 500-mL subsamples for TOC and grain size will be placed into separate 125 mL (4 oz) and 500 mL (16oz) wide-mouth glass jars, respectively. These samples will be labeled and refrigerated at 1 to 4°C. A subsample of ~25 mL to be used for *Clostridium perfringens* analysis will be placed into a sterile sample bottle, labeled, and refrigerated or frozen until analysis. These samples will be delivered to DLS within 24 hours of survey completion.

No holding times for sediment samples are specified under the sampling/analysis protocols specified by NOAA for the National Status & Trends Mussel Watch Project. The U.S. EPA has suggested some holding times by reference to water sample holding times; for example, EPA document #503/8-91-002 presents the interim final Monitoring Guidance for the National Estuary Program (EPA, 1992). Sediment chemistry samples (for organics and metals analysis) will be frozen as soon as possible after sampling and will remain frozen until sample processing begins. It is assumed that if the samples are properly handled and remain frozen, their integrity will not be compromised prior to processing.

### **B2.2.3 Sediment Profile Image Collection**

The sediment profile camera system consists of a digital camera (Canon 7D, 18-megapixel sensor) enclosed in a pressure-resistant housing, a 45° prism, and a mirror that reflects an image of the sediment through the camera lens. A strobe mounted inside the prism is used to illuminate the sediment. The prism is also equipped with a video camera with a feed to the surface via cable so that prism penetration can be monitored in real time. The camera/prism system is mounted in a cradle that is secured to a larger frame, which ensures that the prism penetrates the sediment at a 90° angle. In addition, the camera frame supports a plan-view video camera mounted to view the surface of the seabed in front of the prism. Prior to every field deployment, all essential items are gathered and tested for proper operation.

A winch is used to lower the entire assembly at a steady rate to the seafloor. Images from the video-plan camera are relayed to the surface via the video cable and permit the camera operator to see the seafloor and know exactly when the camera has reached the bottom. The camera operator then can view the prism penetration and choose exactly when to record sediment profile images. Each time the camera is on the bottom, a series of 2–4 photographs is taken, generally within the first 12 seconds after bottom contact. This sampling protocol helps to ensure that at least one usable photograph is produced during each lowering of the camera. After the required number of replicates, the camera assembly is returned to the ship. The date, time, station, replicate, water depth, and comments will be recorded in a field log. Vessel location coordinates will also be recorded with each touchdown of the camera.

The digital camera saves images to compact flash solid-state memory cards. The video signal (from the plan-view video camera) is recorded on mini-DVD digital videotape for later review. The combination of video and digital images will ensure accurate and reliable collection of SPI data. The video contributes the real-time assessment component, whereas the still images provide high-resolution detail for full image analysis in the laboratory.

The sediment profile images will be reviewed within three business days of survey completion to provide a “quick look” analysis for the outfall benthic surveys (Task 6.2). Parameters that will be evaluated in the quick look analysis are

- Sediment grain size
- Sediment layering, thickness, and type
- Surface and subsurface fauna and structures
- Approximate prism penetration
- Approximate surface relief
- Approximate aRPD
- Other major, readily discernable patterns

Within one week of completion of the rapid review, the results will be communicated to MWRA via an e-mail summary of the survey.

### **B2.2.4 Hard-bottom Video Collection**

In June 2017, an ROV survey of the nearfield hard-bottom environment will examine a series of waypoints along transects (Figure 5). At least 20 minutes of video footage will be obtained from each of 23 stations/waypoints from a fixed vessel during the survey. At stations including an outfall diffuser, footage will be evenly divided between the diffuser and the adjacent sea floor. Both standard and high definition video footage will be obtained at each station. The technical manager will monitor the footage as it is being collected and the operator will control the heading and elevation of the ROV to ensure that footage is usable (i.e., the quality of the images is appropriate for further data collection) and that the

survey area is adequately documented. Simultaneous high definition video (1080 p) and still captures using a GoPro Hero 4 Black will be collected throughout occupation of each station. This technique employing a GoPro camera to collect simultaneous HD-video and stills was used very successfully during the hard-bottom survey conducted in 2014. Notes obtained during the field survey will be submitted to MWRA as part of the survey report.

The date, time, and water depth will be recorded on the video image and will appear on the video monitor during the recording. Vessel start and finish positions at each survey location will be captured electronically using HYPACK™. Transect and waypoint/station ID, along with the date, vessel location coordinates, time, and water depth will also be recorded on the field log at the start of each video recording; at the end of each video recording, the vessel location coordinates, along with the date, time, and water depth will be recorded on the field log.

The video footage will be compared in real-time to a summary of each waypoint from the 2014 survey. This will assure that the same location is filmed and will also rapidly highlight any dramatic changes from the previous survey. Any readily observable changes will be communicated to MWRA via e-mail immediately following the cruise. This video comparison component provides real-time qualitative assessment, while individual frames can be extracted from the high-resolution digital video to provide still images if a more detailed analysis is required.

### B3. SAMPLE HANDLING AND CUSTODY

#### B3.1 Sample Handling

Handling of sediment samples while in the field, including storage requirements, is described in Section B2.2 (see Tables 9 and 10) above.

Following each benthic survey, the infaunal samples (stored in sturdy coolers) will be driven by a team member to the Normandeau office in Bedford, NH. One sample from each infaunal station will be randomly selected for archival in Bedford (see Section B3.2.3) and the others will be processed. The samples to be processed, while still preserved in 10% formalin, can be shipped by FedEx ground or 2-day express delivery. The lids on the plastic sample jars will be taped and the jars inserted individually into large zip-locked or tied plastic bags lined with absorbent padding. Normandeau will ship all sediment grab samples obtained on the harbor benthic (Task 5.1) and outfall benthic (Task 6.1) surveys for benthic faunal analysis to Cove Corporation, in Lusby, MD, where the samples will be transferred to ethanol, and the organisms picked from the samples and sorted into major taxonomic groups. After sorting, oligochaete samples will be shipped by Cove to Mr. Russell Winchell of Ocean's Taxonomic Services, in Plymouth, MA, for identification and enumeration.

The sediment chemistry samples collected during the harbor and outfall benthic surveys must be kept cold or frozen as described in Tables 9 and 10. After the surveys are completed, Normandeau will deliver the sediment chemistry samples directly to MWRA's DLS in Winthrop, Massachusetts. A Normandeau staff member will contact DLS staff to arrange a time for sample drop off. This will allow the DLS sample management team to be prepared for sample receipt and check-in in the LIMS system (Constantino et al. 2014). The survey team will keep DLS informed about any changes to the expected delivery time and laboratory personnel will be asked to stay until the samples are received (Yong Lao, MWRA, pers. comm.). All samples will be kept on ice in coolers during transport. If circumstances dictate that the samples must be shipped to DLS, they will be shipped by FedEx Overnight Express. In that case, the samples that were frozen after collection will be placed on dry ice with protective layers of foam or bubble wrap to ensure that they remain intact and frozen during shipment.

#### B3.2 Sample Custody

##### B3.2.1 Sample Tracking

Sample custody will be tracked through sample labels (Figure 6), station logs (Figure 7), and chain of custody (COC) forms (Figure 8).

PROJ.	□ □ □ □ □ □ □ □	METHOD	□ □
DATE	□ □ □ □ □ □	STA.	□ □ □ □
REP.	□	TIME	□ □ □ □
SAMPLE NUMBER			

Figure 6. Example of an Infaunal Sample Label.

<b>STATION LOG: Benthic Sediment Grab Samples</b>	
Project Name: MWRA Harbor and Outfall Monitoring – Contract OP216B	
<b>SURVEY:</b> BF161 <b>STATION ID:</b> _____ TIME ON STATION: _____ STATION DEPTH (M): _____ <b>DATE:</b> _____	Weather: _____  Recorded By: _____
<b>Sample data</b>	<b>Field Measurements</b>
<b>Sample ID Label:</b>	Grab Size: 0.04-m <sup>2</sup> 0.1-m <sup>2</sup>
Latitude:	Grab Penetration (cm):
Longitude:	Sediment Texture:
Replicate:	Redox Depth (cm):
Time:	Analyses: (circle all applicable) Organics Metals TC GR CL FA
Sieved By:	Organisms observed:
Comments:	
<b>Sample ID Label:</b>	Grab Size: 0.04-m <sup>2</sup> 0.1-m <sup>2</sup>
Latitude:	Grab Penetration (cm):
Longitude:	Sediment Texture:
Replicate:	Redox Depth (cm):
Time:	Analyses: (circle all applicable) Organics Metals TC GR CL FA
Sieved By:	Organisms observed :
Comments:	
<b>Sample ID Label:</b>	Grab Size: 0.04-m <sup>2</sup> 0.1-m <sup>2</sup>
Latitude:	Grab Penetration (cm):
Longitude:	Sediment Texture:
Replicate:	Redox Depth (cm):
Time:	Analyses: (circle all applicable) Organics Metals TC GR CL FA
Sieved By:	Organisms observed :
Comments:	
<b>Sample ID Label:</b>	Grab Size: 0.04-m <sup>2</sup> 0.1-m <sup>2</sup>
Latitude:	Grab Penetration (cm):
Longitude:	Sediment Texture:
Replicate:	Redox Depth (cm):
Time:	Analyses: (circle all applicable) Organics Metals TC GR CL FA
Sieved By:	Organisms observed :
Comments:	

TC= total organic carbon, GR = grain size, CL=*C. perfringens*, FA = Infauna

**Figure 7. Example of a Station Log Form.**

### Chain of Custody Form

Project Name: _____ Project Number: _____ Originating Contact: _____ Originator Location: _____ Final Destination: _____ Sampler(s): _____							Presv.	Parameters				Page of	
											Method of Shipment:		
											Comments Below:		
Sample		Collection		Containers		Grab.	Comp.						
No.	Identification	Date	Time	No.	Type								
<b>Total</b>													

Relinquished by: (signature)	Received by: (signature)	Relinquished by: (signature)	Received by: (signature)	Relinquished by: (signature)	Received by: (signature)
Printed Name:	Printed Name:	Printed Name:	Printed Name:	Printed Name:	Printed Name:
Date:	Date:	Date:	Date:	Date:	Date:

Figure 8. Example of a Chain-of-Custody Form.

Sample information for media generated by the hard-bottom survey (station, date, cruise) will be manually entered directly onto DVDs in the field. Hard-bottom survey video segments will also be electronically labeled, and a placard with station information will be photographed before each dive.

Sample labels for infaunal samples will be printed by Normandeau, and affixed to the sample containers in the field. The *Sample ID* will be printed on the labels for infaunal samples (next to “SAMPLE NUMBER”, Figure 6), while sampling station, sample type, replicate number, date and time will be entered manually. The assigned *Sample ID* is a unique, six-digit, serial number. Two additional labels will be printed with the same unique *Sample ID* for each infaunal sample. One will be affixed to the field station log, and the other will be printed on ascot paper and inserted inside the sample container. If multiple sample containers are needed for a single infaunal replicate, the *Sample ID* and additional sample information will be manually entered on blank labels, and the containers will be numbered (e.g., “1 of 2”, “2 of 2”). The *Sample IDs* will be printed on the chain of custody forms along with *Station ID* and replicate number. Since no subsamples are collected from infaunal samples, the unique *Sample ID* for each infaunal sample will be the same as the *Bottle ID* in the project database.

Sediment chemistry samples collected in the field will each be assigned a unique *Sample ID* of the following format: *Station ID*/'C1'/'YY, where "YY" represents the two-digit year. Thus, the *Sample ID* for a sediment chemistry sample collected at station T01 in 2016 would be "T01C116". Sediment chemistry samples will be processed by MWRA's DLS. DLS will provide Normandeau with sample containers and sample labels (Figure 9). DLS will use their Laboratory Information Management System (LIMS) to generate a unique *Bottle ID*. The DLS LIMS *Bottle ID* will be printed in the upper right-hand corner of the sample labels (see Figure 9; note that the seven-digit “SMP.ID.” on the sample label is for internal use by DLS). The *Bottle ID* is a unique alphanumeric identifier of the form M20YY-XXXXXXX or M20YY-XXXXXXX-ZZZ, and each corresponds to a subsample container (bottle). The *Station ID* will be printed on each DLS LIMS sample label. Each label will also list “test codes” at the bottom of the label to indicate the sample type (Figure 9). Table 12 provides test codes and sample containers used for each of the five sediment chemistry sample types. The *Bottle IDs* will be e-mailed to Normandeau prior to the survey and will be recorded on the chain of custody forms. The Normandeau Chief Scientist is responsible for verifying *Bottle IDs* on the samples versus the COC forms prior to delivering the samples to DLS. Once the survey is complete and the chemistry samples delivered to DLS, Normandeau will e-mail the DLS lab staff an Excel file that contains the collected field *Sample IDs* associated with each LIMS *Bottle ID*, along with station and date/time of sample collection.

The Normandeau scientific crew will fill out the station log (Figure 7) at each station. The log includes header fields for entering pertinent information about each station, such as arrival time, bottom depth, and weather observations. In addition, the log sheets contain spaces for specific grab data, such as penetration depth, aRPD, and general descriptions. These sheets will remain in the survey logbook and will be maintained in the project files. During field collection, COC forms (Figure 8) also will be completed. The COC forms will include the unique information from the corresponding label on the sample container, ensuring the tracking of sample location and status.



**MWRA LABORATORY**      **M2010-0090631-001**

Client: NPDES    PROJ: HOM-BN    Trip: 20100812-00086

FACIL: MASSBNTH    LOC: NF23    ST: GRAB

PRESERV: NONE

CONT: G-500-JAR

DATE/TIME COLL:


**SMP. ID: 2181413**

---

COLLECTED BY:      **C**

---

GSA-SOCOM



M2010-0090631-001

**MWRA LABORATORY**      **M2010-0090631**

Client: NPDES    PROJ: HOM-BN    Trip: 20100812-00086

FACIL: MASSBNTH    LOC: NF23    ST: GRAB

PRESERV:

CONT: G-500-JAR

DATE/TIME COLL:


**SMP. ID: 2181300**

---

COLLECTED BY:

---

TOC-SOCIR      TS--SOGRV



M2010-0090631

Figure 9. Example of DLS LIMS Sediment Chemistry Sample Labels.

**Table 12. DLS LIMS "test codes" and sample containers for each sediment chemistry sample type.**

Sample type	Test code	Sample container
TOC/percent dry weight	TOC-SOCIR, TS--SOGRV	Wide-mouth 125 mL (4 oz) glass jar
Grain size	GSA-SOCOM	Wide-mouth 500 mL (16 oz) glass jar
<i>Clostridium perfringens</i>	CLOSSOCFU	Sterile sample bottle
Organic contaminants	PAH-SOSIM, PES-SOSIM,	Wide-mouth 250 mL (8 oz) glass jar with Teflon-lined screw cap
Metals	GFA-SOABS, AL--SOFAA, CR--SOFAA, CU--SOFAA, FE--SOFAA, HG--SOABS, ZN--SOFAA	125 mL (4 oz) plastic I-Chem® jar

### B3.2.2 Sample Custody

Sediment infauna samples will be in the custody of the survey chief scientist from collection until they are transferred to Normandeau’s Bedford, NH laboratory. Normandeau will retain archival samples and send the samples for processing to Cove Corporation. COC forms (Figure 8) will accompany the samples. One complete (copied) set of the infauna COC forms will be included in each shipping container and the original COC forms will be returned to Normandeau after the samples have been logged in at Cove Corporation. Sample processing will occur in Cove's laboratory except for the identification of oligochaetes by Ocean's Taxonomic Services. After the samples are processed, Cove Corporation will send the appropriate samples and specimens to Normandeau (e.g., for re-identification QC, voucher, etc.) or Ocean's Taxonomic Services (oligochaetes) using its own COC transfer forms.

Sediment chemistry samples will be in the custody of a Normandeau survey team member from collection until they are transferred to DLS.

Transfer of benthic chemistry and infaunal samples will be documented on the custody forms. All samples will be distributed to the appropriate laboratory personnel by hand or by Federal Express. A copy of the COC form will be retained by the field sample custodian in the field log. The original will accompany the samples to the laboratory for subsequent sample transfer. When samples arrive at each of the laboratories, custody will be relinquished to the sample management staff. The sample management staff will verify that the custody seals on the cooler are intact. The laboratory sample management staff will then examine the samples, verify that sample-specific information recorded on the COC is accurate and that the sample integrity is uncompromised, log the samples into the laboratory tracking system, and complete and sign the COC form so that transfer of custody of the samples is complete. Any discrepancies between sample labels and transmittal forms, the condition of the samples upon receipt, and any unusual events or deviations from the QAPP will be documented in detail on the COC, and the Normandeau Task Manager and Program Manager notified. Copies of completed custody forms will be delivered (scanned and emailed or faxed) to the Normandeau Task Manager, Eric Nestler, within 24 hours of receipt. For biology samples, an e-mail confirming receipt of all samples will be sent to Normandeau within 24 hours of receipt; the signed custody forms and verification that the custody seals were intact,

will follow by mail within one week. The signed original custody forms will be retained in the Normandeau project files.

All original SPI field data sheets and associated media (video and digitally formatted media) will be generated by and remain in the custody of the senior scientist from Diaz & Daughters. Similarly, all original data from the yearly ROV surveys will be generated and maintained by Dr. Hecker of Hecker Environmental.

### **B3.2.3 Sample Archival Policies**

The types of materials that may be archived under this contract include samples, sample residues, a reference collection, and other infaunal specimens.

One randomly selected sample from each infaunal station will be archived, and the others will be processed. Archived samples will be rinsed with fresh water over 300- $\mu$ m-mesh screens and transferred to 70–80% ethanol for storage at Normandeau’s Bedford, NH laboratory.

Infaunal samples (both archived and processed samples) will be held until acceptance of the relevant monitoring report by MWRA. These samples will then be disposed of after approval from the MWRA Benthic Monitoring Project Area Manager. Processed samples will be maintained at Cove Corporation. Infaunal sample residues will be held until the data report is accepted by MWRA, and then may be discarded. Reference collection specimens will be retained for the duration of the project and then returned to MWRA or another designated laboratory. Reference collection specimens will be clearly identified, labeled with the project number and unique identification number, and stored under appropriate conditions for the length of the storage period. Other infaunal specimens may be retained by the contracting laboratory indeterminately as there is no contractual obligation regarding those specimens.

## **B4. ANALYTICAL METHODS**

The parameters to be measured during the various benthic monitoring tasks can be characterized as macrobiological and sedimentological (habitat properties) (Table 14). Macrobiological parameters are based on (1) the species-level identifications of the soft-bottom infauna and (2) identifications of epibenthic macrofauna seen in the hard-bottom study; these parameters include community measures such as abundance (or percent cover), numbers of species, and diversity. The general nature of the infaunal community is measured during the SPI studies, which also generate information about sediment geophysical properties, including sediment grain size and other sediment habitat properties.

### **B4.1 Soft-bottom Infaunal Analysis**

At Cove Corporation, samples will be rinsed with fresh water over 300- $\mu$ m-mesh screens to remove any broken-up mud casts and transferred to 70–80% ethanol for storage prior to sorting. To facilitate the sorting process, all samples will be stained in a saturated alcoholic solution of Rose Bengal at least overnight, but no longer than 48 hours to avoid over-staining. After rinsing with clean fresh water, small aliquots of the sample will be placed into white enamel pans, and all organisms, including anterior fragments of polychaetes, will be removed and sorted to major taxonomic categories such as polychaetes, arthropods, and mollusks. Sorting will be done under a dissecting microscope, and organisms will be placed into vials of 70–80% ethanol.

After samples have been completely sorted, the organisms will be delivered to taxonomists for identification and enumeration. Identifications will be made to the lowest practical taxonomic level, usually species. Ms. Hannah Proctor (Normandeau) will provide general oversight of the taxonomy of the soft-bottom fauna identified on this project. Cove taxonomists (under the oversight of Ms. Nancy Mountford) will identify all groups except for oligochaetes, which will be processed by Mr. Russell Winchell of Ocean's Taxonomic Services.

Infaunal data will be recorded on project-specific data sheets (Appendix B) and will then be entered into an electronic format. Data entered into an electronic database will either be manually verified for accuracy or will be entered in duplicate, and a comparison program run to identify any discrepancies.

**Table 13. Benthic Survey Sample Analyses.**

Parameter	Laboratory	Unit of Measurement	Method	Reference
<b>Infaunal Analysis</b>	Cove Corporation	Count/species (# per grab)	ID and Enumeration	Section B4, this QAPP
<b>Sediment Profile Images</b>	Diaz & Daughters	Various (see Table 15)	Various	Section B4, this QAPP
<b>Hard-bottom</b>	Hecker Environmental	Various	Various	Section B4, this QAPP
<b>Organic Analyses</b>				
Polycyclic Aromatic Hydrocarbons (PAH)	DLS*	µg/kg dry wt.	GC/MS-SIM	Constantino et al. 2014
Polychlorinated Biphenyls (PCBs)	DLS	µg/kg dry wt.	GC/MS-SIM	Constantino et al. 2014
Pesticides	DLS	µg/kg dry wt.	GC/MS-SIM	Constantino et al. 2014
<b>Metals Analyses</b>				
Major Metals (Al, Fe)	DLS	% dry wt.	FAA	Constantino et al. 2014
Trace Metals (Ag, Cd, Ni, Pb) (Cr, Cu, Zn) (Hg) (Pb)	DLS	mg/kg dry wt.	GFA FAA CVAA GFA	Constantino et al. 2014
<b>Ancillary Physicochemical and Microbiological Parameters</b>				
TOC	DLS	%C by dry weight	Infrared detection	Constantino et al. 2014
Sediment Grain Size	DLS	% dry weight	Folk (1974)	Constantino et al. 2014
Microbiology: <i>Clostridium perfringens</i>	DLS	Spores/g dry weight	Emerson and Cabelli (1982)	Constantino et al. 2014

\* MWRA's Department of Laboratory Services (DLS). The analysis of certain parameters may be performed by contracted laboratories as detailed in Constantino et al. (2014), and updates as issued by DLS.

MWRA has established a project-specific reference collection, which will be used by project taxonomists to ensure comparability of the taxonomic identifications performed under the current HOM contract with those made under previous contracts. This collection will be maintained by Normandeau and will be checked regularly by Normandeau laboratory staff to ensure that it is stored properly to reduce the risk of alcohol evaporation and damage, and to ensure that labels are intact and legible. Vials in which the alcohol level is low will be filled with clean alcohol. Any labels showing signs of deterioration will be replaced. During the periods that Cove Corporation and Ocean’s Taxonomic services have worked on the HOM program, each lab has maintained a duplicate reference collection. Normandeau will ship vials of individual taxa from the MWRA collection to either lab if they encounter species not in their in-house collections.

As taxa not previously identified during the program are encountered, they will be added to the MWRA collection. As part of the maintenance of the reference collection, taxonomists will review any possible inconsistencies between previous identifications and those made during this project. The taxonomic status of species in the collection will be evaluated as relevant systematic revisions appear in the scientific literature. If necessary, recommendations for changes in taxonomic usages will be made to MWRA. The reference collection will be returned to MWRA or its designee upon submission of the final reference collection status report in June 2020.

Additional details on infaunal sample analysis methods that are not specified elsewhere in this QAPP are provided in the Cove Corporation Processing and Quality Control Procedures (Appendix C). For any case in which Cove's general procedures (Appendix C) are different from those described in this QAPP, the procedures described in this QAPP will be followed.

#### **B4.2 Sediment Profile Image Analysis**

Dr. Robert Diaz of Diaz & Daughters will perform the SPI analysis. After field collection, analysis will continue with a reanalysis of the plan-view video previously examined in the field (section B.2.2.3). A visual analysis including the same parameters as estimated from the video SPI will be made for the still images. The final rapid “quick look” analysis based on this review of both video and still images will be completed within three days of the completion of field work.

Each image file will be labeled with station and replicate data. The first analytical step is accomplished by visually examining the images and recording all observed features into a preformatted, standardized spreadsheet file. The parameters to be measured are summarized in Table 14 and discussed in more detail in Appendix D. Further details about these analyses can be found in the standardized image analysis procedures of Viles and Diaz (1991).

The videotapes also are analyzed visually, with all observed features also recorded into a preformatted, standardized spreadsheet. Adobe Photoshop™ and NIH Image (National Institutes of Health) are used to preprocess and analyze the images. Computer analysis of each image is standardized by executing a series of macro commands. SPI results, in the form of an Excel spreadsheet, will be delivered to Normandeau for checking and uploading into the HOML application.

#### **B4.3 Hard-bottom Analog and Digital Video**

The analog video footage will be viewed by Dr. Barbara Hecker of Hecker Environmental and Deborah Rutecki (Normandeau) for habitat characteristics and heterogeneity (substrate types, sediment drape, and habitat relief) and for biotic components. If additional confirmation of detail is required, the high-definition video may be examined and selected still images extracted. The data from the video will

initially be entered on data sheets and then into an Excel spreadsheet. This spreadsheet will be delivered to Normandeau for submission to MWRA.

**Table 14. Parameters Measured from Sediment Profile Images.**

Parameter	Units	Method <sup>1</sup>	Description
Sediment Grain Size	Modal phi interval	V	An estimate of sediment types present. Determine by comparison of image to images of known grain size.
Prism Penetration	cm	CA	A geotechnical estimate of sediment compaction. Average of maximum and minimum distance from sediment surface to bottom of prism window
Sediment Surface Relief	cm	CA	An estimate of small-scale bed roughness. Maximum depth of penetration minus minimum.
Apparent Reduction-oxidation Potential Discontinuity Depth (from color change in sediment)	cm	CA	Estimate of depth to which sediments are oxidized. Area of aerobic sediment divided by width of digitized image.
Methane/Nitrogen Gas Voids	Number	V	Count
Epifauna	—	V	If present, note and identify
Tubes Type Density	— Number	V V	Identify as amphipod or polychaete Estimate number (none, few, some, many)
Surface Features Pelletal Layer Bacterial Mats	— —	V V	Note if present If present, note color
Infauna Visible Infauna Burrow Structures Feeding (Oxic) Voids Successional Stage	Number — Number —	V V V V	Count, identify Count Count Identify
Organism Sediment Index	—	CA	Derived from RPD, Successional Stage, Voids (Rhoads and Germano 1986)

<sup>1</sup> V: Visual measurement or estimate  
 CA: Computer analysis

## B5. QUALITY CONTROL

### B5.1 Sampling

#### B5.1.1 Navigation

##### Accuracy and Precision

Normandeau's GPS navigation system will be used to acquire navigation data for soft-bottom benthic surveys. Normandeau vessels use a Simrad NSS7 Evo2 with a high-gain 10 Hz receiver. Hand-entered coordinates for SPI and grab sample locations will be checked against electronic waypoints on the shipboard GPS after each sample is collected. Waypoints will then be stored on the shipboard GPS until data checking (using SAS) confirms that all samples were collected within 30 meters of the target station location. Any incorrect waypoint that is identified through data checking will be corrected using the electronic waypoint stored on the shipboard GPS.

During the hard-bottom reconnaissance surveys, a GPS navigation system and an ORE International LXT Underwater Positioning System will be used for positioning the vessel and the ROV. The Windows™-based software, HYPACK™, will be used to integrate these positioning data and provide real-time navigation, including the position and heading of the vessel and the position of the ROV relative to the vessel. Sampling coordinates for the hard-bottom surveys will be captured electronically using HYPACK™.

##### Comparability

All sampling positions will be comparable to positions obtained by previous MWRA monitoring activities as well as by other researchers that have used or are using GPS at these stations. The station locations listed in Tables 2, 3, and 4 are targets and at each sampling station the vessel is positioned as close to the target coordinates as possible. For the hard-bottom surveys, the start and end points of each transect are recorded together with the exact position of each still photograph.

##### Completeness

For all navigation data, 100% completeness has been defined as the QAPP requirement. GPS navigation systems will be used to acquire navigation data for all surveys. Depth measurements will be recorded at each station. The Chief Scientist will review station logs prior to leaving each station to ensure that these data have been accurately collected.

#### B5.1.2 Grab Sampling

All sediment samples to be used for faunal analyses will be collected with a 0.04-m<sup>2</sup> Ted Young-modified van Veen grab sampler. On surveys where contaminant sample collection is not required, a dedicated grab sample, collected by the 0.04-m<sup>2</sup> grab sampler, will provide adequate quantities of sediment for grain size, TOC, and microbiology. Sediment samples for physical and chemical analyses will be collected with a Kynar-coated 0.1-m<sup>2</sup> Ted Young-modified van Veen grab. Undisturbed samples will be achieved by careful attention to established deployment and recovery procedures. Procedures used by survey crews will cover the following aspects of deployment and recovery:

- Thorough wash-down of the grab before each deployment
- Control of penetration by adding or removing weights to the frame and adjusting descent rate
- Slow recovery until grab is free of the bottom
- Inspection for signs of leakage
- Securing the grab on deck

Each grab sample will be inspected for signs of disturbance. The following criteria identify ideal characteristics for an acceptable grab sample:

- Sampler is not overfilled with sediment; the jaws must be fully closed and the top of the sediment below the level of the opening doors
- Overlying water is present and not excessively turbid
- Sampler is at least half full, indicating that the desired penetration was achieved

In certain locations, however, slight over-penetration may be acceptable at the discretion of the Chief Scientist. Mild over-penetration may be acceptable according to the following standards:

- The sediment surface is intact on at least one side of the grab
- Little or no evidence that the surface sediment has pushed through the grid surface of the grab, i.e., no visible imprint from the screening outside of that grid
- No evidence that sediment has squirted out through the hinge or the edges of the grab

Because of the difficulty of obtaining undisturbed sediment in areas with exceptionally thick, anoxic mud, these standards occasionally may be relaxed further. The Chief Scientist will make the final decision regarding acceptability of all grabs, and the overall condition of the grab (e.g., “slight over-penetration on one side”) will be documented on the station log.

#### B5.1.2.1 *Benthic Infauna*

##### Accuracy, Precision, and Representativeness

There will be no subsampling. Consequently, the accuracy, precision, and representativeness of the sampling will depend upon the factors discussed above under Section A7.1.2.

##### Comparability

Procedures for washing, sieving, and preserving the samples will be consistent with methods used in previous studies. The use of 300- $\mu\text{m}$ -mesh sieves only, rather than stacked 500- $\mu\text{m}$  and 300- $\mu\text{m}$ -mesh sieves as in 1991 through 1994, will have no impact on the comparability of the samples because the faunal abundances will be compared with the total abundances reported for all years. In addition, samples will be collected only by trained staff under the supervision of a chief scientist with experience in the collection of benthic infaunal samples.

##### Completeness

All required samples will be collected at all of the stations specified in the current HOM contract for each survey. The entire sample will be sieved and all material retained on the 300- $\mu\text{m}$ -mesh screen will be fixed for analysis.

#### B5.1.2.2 *Sediment*

##### Accuracy, Precision, and Representativeness

These qualities will be assured by the sampling scheme (see B.5.1.1 Grab Sampling above) and by ensuring that samples are well homogenized and subsampled and preserved following methods detailed in Section B2.2.2.



### Comparability

Procedures for sampling and subsampling are comparable to those used on previous MWRA surveys and other investigations in Boston Harbor and Massachusetts Bay.

### Completeness

All required samples will be collected at all of the stations specified in the current HOM contract for each survey.

#### **B5.1.3 Sediment Profile Imagery**

The DQOs for the field collection of the SPI will be met by following several procedures. Proper assembly and operation of the surface video and digital camera SPI system will ensure that images obtained are clear and of high quality. Real-time monitoring of the surface video will permit some degree of evaluation of the potential quality of the deployment. Prior to every field deployment, all video/SPI components are assembled and tested for proper operation. Once the video/SPI system is assembled on board the research vessel, a system check is initiated that includes all features of the system, from tightening all bolts and video cable connectors to testing the video camera and deck video monitor and recorder. Proper system functioning (penetration of prism, flash from digital SPI camera) will be monitored in real time on deck via the video monitor.

### Accuracy, Precision, and Representativeness

Accuracy and precision will be ensured by using properly functioning equipment and real-time monitoring of images as described above to acquire clear and analyzable images. Representativeness will be ensured by sampling at previously sampled locations that were chosen based on similarity of habitat or to allow for wide geographic coverage.

### Comparability

The methods used to collect the sediment profile images will be consistent with those used previously in the MWRA HOM programs. These documented methods will be followed consistently by trained staff members throughout the program.

### Completeness

To ensure that all required images are collected at all planned stations, the digital image counter will be checked to confirm that the system was functioning properly after every station. Any mis-fires or improper camera operation will be corrected while on station. Almost any electronic or mechanical failure of the profile camera can be repaired in the field. Spare parts and a complete back-up camera will be carried on each SPI survey.

#### **B5.1.4 Hard-bottom ROV Survey**

The DQOs for the field collection of the hard-bottom survey will be met by adhering to the following measures. Real-time viewing of video images during the surveys will ensure that the video will be of sufficient quality to achieve the objectives of the survey. Analog video will be stored to DVD while high-definition video footage will be stored to an external hard drive. All equipment, including the ROV and cameras, will be cleaned and checked thoroughly before each deployment.

### Accuracy, Precision, and Representativeness

Accuracy and precision will be ensured by using properly functioning equipment and real-time monitoring of images as described above to acquire analyzable images. Hard-bottom transects and waypoints to be recorded and photographed are those that were selected by MWRA to be representative of the hard-bottom habitats in the vicinity of the outfall.

### Comparability

The field methods used will be similar to those followed in previous surveys except that 35-mm film will not be used. Instead of 35-mm film, high-definition video will be taken at each waypoint that will allow still images to be captured if detailed analysis is determined necessary. The same transects as those occupied since the beginning of the program will be followed; this design was only slightly modified by the deletion of two stations (T4, stations 1 and 3) in 2003 and the addition of two stations (T11-1 and T12-1) in 2005. All transects will be occupied so that the nature of the epifauna and sedimentary environment in the hard-bottom area can be compared to that recorded on previous surveys.

### Completeness

All requisite transects (and their waypoints) will be recorded on DVD and external hard drive. Approximately 20 minutes of analog and high-definition video will be simultaneously collected at each waypoint. ROV operations will be monitored by watching the video in real time during the survey. The DVDs and external hard drive will be checked in the field to ensure that the video images are recorded.

## **B5.2 Laboratory Activities**

### **B5.2.1 Infaunal Analysis**

#### Accuracy

Benthic infauna will be identified by experienced taxonomists at Cove Corporation. In cases where different taxonomists identify replicates from the same station, discrepancies in species identifications will be recognized during data entry and reviewed. Taxonomic discrepancies will be addressed by communication among the taxonomists. In the case of questions about organisms in specific taxonomic groups, specimens may be sent to recognized experts for a second opinion on the identification. Standard taxonomic references will be used, and selected specimens of newly found species will be retained as part of an already existing reference collection.

#### Precision

Sorting technicians will remove all organisms from the samples and separate them into major taxonomic groups. All residual material will be labeled and stored for QC analysis. Samples will be divided into batches of approximately 10 samples. Approximately 10% of the samples from each batch will then be randomly chosen for an independent QC check. If more than 5% of the total organisms in the QC sample have been missed, all remaining samples from that batch will be re-sorted (Appendix C).

#### Representativeness

Because all of the sample will be analyzed, representativeness will be determined by sampling factors.

#### Completeness

Since one sample from each station will be archived, the loss of one sample will still permit data to be obtained from the archived sample for that station. One hundred percent completeness is expected.

#### Comparability

Methods of analysis will be comparable to those used in previous benthic investigations in Boston Harbor and Massachusetts Bay. Comparability of the identifications will be ensured through the use of standard taxonomic references and by comparison of specimens to the MWRA Reference Collection. Taxonomists will be familiar with fauna from this study area or have worked on this project previously. The reference collection will be maintained and, if new species are identified, expanded. Any new species that have not been reported from prior surveys for this benthic monitoring program will be carefully verified and checked against similar taxa in the reference collection.

### **B5.2.2 Sediment Profile Image Analysis**

#### Accuracy

Control of the computer image analysis includes system preparation, actual image analysis, and data reduction. A set of standard instructions is followed in setting up the image processor. Once the system is on and functioning, a standardized scale slide is measured to ensure that the linear measurements made on the profile images are accurate.

#### Precision

Even with the most careful control, there may be variations in external lighting that cause subtle color differences among images.

#### Completeness

The three best images taken at each station, if usable, will be analyzed.

#### Comparability

The comparability of the SPI analyses will be ensured by consistent application of QC procedures and by using the same analysts throughout the project whenever possible. The analyses will be comparable to those previously performed for the MWRA program. However, slight variation in the manner in which the operator examines the slide may occur. This may result in a slight variation of image areas analyzed within and between slides. To control for operator error, 10% of all slides will be reanalyzed and the results compared to previous results. If any discrepancies with the original analysis are found then all images will be checked and reanalyzed.

#### Representativeness

Representativeness is defined by the stations selected in the baseline.

### **B5.2.3 Hard-bottom Video Analysis**

#### Accuracy and Precision

Analog video footage will be examined by Dr. Barbara Hecker and Deborah Rutecki for a range of substrate characteristics, sediment drape, and habitat relief, and the occurrence of large identifiable taxa at each waypoint. Encrusting, cryptic, or very abundant taxa will not be counted from the videotapes because of low visual resolution and time constraints.

#### Completeness

All appropriate analog video footage will be analyzed.

#### Comparability

The methods of collection and analysis of the video footage are sufficiently similar to previous MWRA hard-bottom studies (Nestler et al. 2014, Nestler et al. 2011) to allow comparisons between the previously collected baseline data and the monitoring data to be made. The method of analysis for the analog video footage is similar enough to previous studies to permit qualitative comparisons.

#### Representativeness

Hard-bottom biological assemblages are routinely documented using video footage. For true representativeness, the video footage should be randomly located within waypoints to allow for unbiased extrapolation of the data for the area being sampled. Due to various technical constraints of working with an ROV, true randomness is rarely accomplished in hard-bottom studies. The location of the photographic coverage is usually constrained by (1) strength of tidal currents determining the direction in which the ROV can maintain a heading, (2) mobility of the ship during station occupation due to surface currents and wind, (3) bottom visibility (moving in a down-current direction frequently causes reduced visibility

due to sediment clouds), (4) bottom topography (going over every boulder could keep the ROV too far off bottom), and (5) tether length (the ROV could be at the end of the tether before the requisite footage has been collected). Within these constraints, representative visual footage of each area will be obtained.

Due to the 3-dimensional nature of the video footage, qualitative characterization of habitat relief and habitat and biotic heterogeneity is usually easier from the video footage. Additionally, the video footage covers more area and is thus used to document the occurrence of larger, more sparsely distributed fauna.

#### **B5.2.4 Sediment Chemistry**

All sediment samples scheduled to be analyzed for organic contaminants and metals in 2017 will be analyzed by MWRA's DLS. The DQOs for the DLS are provided in Constantino et al. (2014), and updates as issued by DLS.

#### **B5.2.5 Physicochemical and Microbiological Parameters**

Sediment samples collected in 2017, 2018, and 2019 will be analyzed for TOC, sediment grain size, and *Clostridium perfringens* by DLS or by a laboratory contracted by DLS. DQOs for these analyses are provided in Constantino et al. (2014), and updates as issued by DLS.

No field-collected QC samples, including field duplicates, or equipment and field blanks for sediment chemistry are required by the MWRA, nor have they been in past harbor and outfall monitoring programs. Adequate sediment is collected for the analytical laboratories to perform the required MS/MSD analyses.

### **B6. INSTRUMENT/EQUIPMENT TESTING, INSPECTION, AND MAINTENANCE**

Maintenance of and repairs to instruments will be in accordance with manufacturers' manuals.

#### **B6.1 Laboratory Equipment**

Microscopes used for sorting of faunal samples and taxonomic identification of specimens are cleaned and maintained as needed.

No analytical laboratory instruments are covered by this QAPP. For details of laboratory equipment testing, inspection, and maintenance pertinent to the sediment chemistry analyses performed by DLS on samples collected during the current HOM contract, see Constantino et al. (2014), and updates as issued by DLS.

#### **B6.2 Sediment Profile Image Analysis System**

Prior to every field deployment, all video components are collected and tested for proper operation. Once the video SPI system is assembled on board the research vessel, a system check is initiated. This check includes all features of the video SPI system, from tightening all bolts and video cable connectors to testing the video camera and deck video monitor and recorder. In addition, before every field deployment, the clock in the SPI system will be set to match the clock used by the navigation system aboard the research vessel.

Proper system functioning (e.g., penetration of prism, flash from digital SPI camera) will be monitored in real time on deck via the video monitor. Any misfires or improper camera operation can then be corrected while on station. Almost any electronic or mechanical failure of the video camera can be repaired in the field. Spare parts and complete back-up video and digital cameras will be carried on each survey.

**B6.3 Hard-bottom ROV Video**

The subcontractor, CR Environmental, is responsible for ensuring that all maintenance and calibrations of the video cameras and ROV are carried out prior to the survey, in accordance with the manufacturer’s specifications.

**B7. INSTRUMENT/EQUIPMENT CALIBRATION AND FREQUENCY**

**B7.1 Navigation Equipment**

GPS units on Normandeau’s research vessels are maintained and calibrated to the manufacturer’s specifications.

**B7.2 Laboratory Equipment**

No analytical laboratory instruments are covered by this QAPP. For details of laboratory instrument and equipment calibration schedules pertinent to the sediment chemistry analyses performed by DLS on the samples collected during the current HOM contract, see Constantino et al. (2014), and updates as issued by DLS.

**B8. INSPECTION/ACCEPTANCE OF SUPPLIES AND CONSUMABLES**

Critical supplies for field activities will be the responsibility of the Chief Scientist (Table 15).

**Table 15. Supplies, Acceptance Criteria, and Responsibility for Critical Field Supplies.**

Critical Supplies and Consumables	Inspection Requirements and Acceptance Criteria	Responsible Individual
Jars for infaunal samples	Visually inspected for cracks, breakage, and cleanliness. May be reused.	Chief Scientist (Normandeau)
Sample bottles for sediment chemistry delivered by DLS	Visually inspected upon receipt for cracks, breakage, and cleanliness. Must be accompanied by certificate of analysis.	Chief Scientist (Normandeau)
Chemicals and reagents	Visually inspected for proper labeling, expiration dates, appropriate grade.	Chief Scientist (Normandeau)
Sampling equipment (grabs)	Visually inspected for obvious defects, damage, and contamination.	Chief Scientist (Normandeau)
SPI camera system	Visually inspected for obvious defects or damage; electronics tested.	Dr. R. Diaz Diaz & Daughters
ROV and video cameras	Visually inspected for obvious defects or damage; electronics tested	Mr. C. Ryther CR Environmental
Navigation instruments	Functional checks to ensure proper calibration and operating capacity.	Chief Scientist (Normandeau)

If unacceptable supplies or consumables are found, the Chief Scientist will initiate corrective action. Corrective measures may include repair or replacement of measurement equipment, and/or notification to vendor and subsequent replacement of defective or inappropriate materials. All actions will be documented in the project files.

## **B9. NON-DIRECT MEASUREMENTS**

Non-direct data (historical reports, maps, literature searches, and previously collected analytical data) may be used in the preparation of the summary reports (Task 12). These data may come from sources such as

- Prior MWRA harbor and outfall monitoring program results
- Results of other MWRA studies including water quality monitoring and flux study data
- Pertinent data collected by other agencies, such as USGS bathymetry data and NOAA weather records, as appropriate

## **B10. DATA MANAGEMENT**

### **B10.1 Data Custody**

Custody of field data will be the responsibility of the Chief Scientist during the field activity. Field data will be recorded electronically or manually on the field logs.

Laboratory managers will be responsible for custody of data generated by benthic team laboratories (see below).

Each team member involved in this project is responsible for the internal custody of their electronic and hard-copy data until they are submitted to Normandeau's Data Manager, Mr. Eric Nestler. All hand-entered data that is submitted electronically to Normandeau will receive 100% verification (or will be entered and checked using double data entry) prior to submission. All manual data entry performed by Normandeau staff will also receive 100% verification, or will be done using the KeyesPunch™ software application, which employs automated controls and data verification. Formats designed to comply with rules of the EM&MS database will be used in this application to constrain data entry, and data verification will be provided through double data entry. These features will ensure that any entry errors are caught and corrected as the operator keys the data.

Data submissions (both hard copy and electronic) will be logged in upon receipt at Normandeau by the data manager and a copy of the login will be maintained in the project files.

Data to be used in the annual reports must be requested from MWRA, who will generate a data export from the EM&MS database.

### **B10.2 Laboratory Data and Data Reduction**

All data generated by benthic team laboratories will be either electronically transferred from the instrument or manually read from the instrument display (optical field of a microscope or video monitor) and entered directly into an electronic format (e.g., Excel spreadsheet in the case of SPI data and hard-bottom data), or entered into laboratory forms or data sheets, and then manually entered into an electronic format. All manually entered data will receive 100% verification or will be entered and checked using double data entry.

Data reduction is the process of converting raw numbers (e.g., numbers of organisms per replicate) into data that can be displayed graphically, summarized in tables, or compared statistically for differences between mean values for sampling times or stations. Only the SPI data discussed below requires some

manipulation before being submitted to the Normandeau Data Management team. All data reduction will be performed electronically, either by the instrument software or in a spreadsheet, and will be validated according to procedures described in Section D2.

The format for final data submission is described below.

#### **B10.2.1 Infaunal Analysis**

There is no manipulation of infaunal data prior to submission. Cove Corporation and Ocean's Taxonomic Services will include the MWRA species code and the associated scientific name for each taxon in the infaunal abundance data submitted to Normandeau. Taxonomic consistency between the current and previous (i.e., existing species codes and their associated scientific name in the MWRA database) identifications will be verified using the project reference collection (see Sections B4.1 and B5.2.1).

#### **B10.2.2 Sediment Chemistry Analysis**

No sediment chemistry analyses will be performed by Normandeau or its subcontractors under this contract. Details regarding DLS's data reduction procedures are provided in Constantino et al. (2014), and updates as issued by DLS.

#### **B10.2.3 SPI Analysis**

After visual and computer image analyses are completed, a standard set of parameters taken from both analyses is combined and tabulated into an Excel spreadsheet for delivery to Normandeau.

SPI data are used to summarize environmental conditions through the calculation of the Organism-Sediment Index (OSI). The OSI (Rhoads and Germano 1986) is an integrative estimate of the general ability of the benthic habitat to support fauna. The OSI is defined from SPI parameters and the indirect estimation of bottom dissolved oxygen levels. The lowest value of the OSI (-10) denotes habitats that have little or no dissolved oxygen, no apparent evidence of surface or subsurface fauna, and where methane gas is present (subsurface data). The highest value of the OSI (+11) is given to habitats that have high dissolved oxygen, a deep apparent RPD layer, evidence of fauna, and no methane gas. The index is calculated by using the RPD depth, the successional stage, the presence of methane voids, and visual indications of low oxygen concentrations in the water column. The formulation for the OSI and three hypothetical examples are shown in Table 16. For SPI data collected from the nearfield, RPD values will be compared by MWRA to the threshold levels (MWRA 2001, Appendix A).

#### **B10.2.4 Hard-bottom Analysis**

There is no manipulation of hard-bottom data prior to submission.

### **B10.3 Data Set Structure**

Electronic Data Deliverables will be prepared by Normandeau in a structure and format that complies with the MWRA database rules. Specifications for data sets are provided in Appendix E.

### **B10.4 Project Database Codes**

Standardized codes and qualifiers help to ensure consistency over time in MWRA's Benthic Monitoring Program. Table 17 shows the qualifiers that may be used with the infaunal, hard-bottom, and SPI results. Table 18 shows the parameters and database codes applicable only to the SPI analysis. The hard-bottom codes are listed in Table 19. The hard-bottom PARAM\_CODES and the infaunal abundance SPEC\_CODES are too numerous to list; these codes can be found in the Oracle table maintained by MWRA. The database tables CODE\_LIST and SPECIES\_CODES have been populated with most of the

codes used for these data. Additional codes may be added by the MWRA database manager when requested by the Normandeau data management team.

**Table 16. Formulation of the Organism-Sediment Index.**

SPI Parameter	Score	Three Hypothetical Examples		
		Station 1	Station 2	Station 3
<b>RPD Depth (cm) (choose one value)</b>				
0	0			
>0-0.75	1	X		
0.76-1.50	2			
1.51-2.25	3		X	
2.26-3.00	4			
3.01-3.75	5			X
>3.75	6			
<b>Successional Stage (choose one value)</b>				
Azoic	-4			
Stage I	1	X		
Stage I-II	2			
Stage II	3		X	
Stage II-III	4			
Stage III	5			X
Stage I on III	5			
Stage II on III	5			
<b>Sediment/Near-bottom Gas (choose neither, one, or both as appropriate)</b>				
Methane	-2	X	X	
No/Low DO	-4	X		
<b>Calculated OSI</b>		<b>-4</b>	<b>+4</b>	<b>+10</b>

Additional database codes used for the benthic monitoring task are included in Table 20. A comprehensive list of parameters and database codes for sediment chemical and physicochemical analytes and benthic taxa can be requested from the MWRA EM&MS Database Manager, Dr. Douglas Hersh. New codes must be requested before the data are submitted. MWRA has the responsibility for maintaining the code list for the EM&MS database.



**Table 17. Data Qualifiers**

Qualifier	Description	Value Reported ?	Comment required
	Value is not qualified	Yes	No
A	Value above maximum detection limit, e.g. too numerous to count or beyond range of instrument – For SPI this means that the value (i.e. RPD depth) was greater than the penetration depth of the prism.	No	No
e	Results not reported, value given is NULL, see comments field – For SPI this means no image, blank slide.	No	Yes
P	Present but uncountable, value given is NULL – For SPI this means that the value could not be estimated from the image.	Yes	No
p	Lab sample bottles mislabeled - caution data use	Yes	Yes
q	Possibly suspect/invalid and not fit for use. Investigation pending.	Yes	Yes
s	Suspect/Invalid. Not fit for use	Yes	Yes
w	This datum should be used with caution, see comment field	Yes	Yes

**B10.5 Data Submittal to MWRA**

Prior to submittal to MWRA, all data will receive a quality assurance review by Normandeau during which SAS software will be used for logical error checks and to check for violations of EM&MS database constraints and business rules. Any issues will be corrected in the data files. Any irresolvable issues in the data files identified by quality control checks (for example, stations more than specified distance from target) will also be submitted to MWRA with the data deliverable.

Electronic data submissions will be made by Normandeau’s data manager using MWRA’s HOML web application.

**B10.6 Data Report Quality Control Checks**

Range checks will be performed on the parameters given in Table 21. These checks will be done by MWRA and reviewed by Normandeau as part of the data reporting process (see section A.9).

**Table 18. Parameters and Database Codes for SPI Analysis.**

Parameter	Param_code	Meth_Code	Unit_code	Gear_code
Number of water-filled spaces in sediment that appear to be abandoned feeding voids	ANOXIC_VOID_NUM	WILL02		SPI_DIGI
Average penetration	AVG_PEN	WILL02	cm	SPI_DIGI
Average depth of the apparent color redox potential discontinuity layer	AVG_RPD	WILL02	cm	SPI_DIGI
Number of burrows	BURR_NO	WILL02		SPI_DIGI
Number of gas filled spaces in sediment resulting from methanogenesis	GAS_VOID_NUM	WILL02		SPI_DIGI
Sediment grain size	GRN_SZ	WILL02		SPI_DIGI
Organism-Sediment Index	OSI	WILL02		SPI_DIGI
Number of active, water-filled spaces in sediment resulting from sub-surface feeding activity of infauna	OXIC_VOID_NUM	WILL02		SPI_DIGI
Maximum penetration depth of camera	PEN_MAX	WILL02	cm	SPI_DIGI
Minimum penetration depth of camera	PEN_MIN	WILL02	cm	SPI_DIGI
Maximum depth of the apparent color redox potential discontinuity layer	RPD_MAX	WILL02	cm	SPI_DIGI
Surface relief across the 15 cm width of the face plate. Calculated as (PEN_MAX – PEN_MIN)	SR	WILL02	cm	SPI_DIGI
Infaunal worms counted	SUB_FAUNA_WORMS	WILL02		SPI_DIGI
Estimated infaunal successional stage	SUCC_STG	WILL02		SPI_DIGI
Features on the sediment surface	SURFACE_FEATURES	WILL02		SPI_DIGI
Amphipod tube	TUBE_AMPH	WILL02		SPI_DIGI
Polychaete tube	TUBE_POLY	WILL02		SPI_DIGI

**Table 19. Database Codes<sup>1</sup> for Hard-bottom Video Analysis.**

Type of Data	Code Type	Code	Description
video	PRIMARY_SUBS_CODE <sup>2</sup>	b	Boulders
video	PRIMARY_SUBS_CODE	c	Cobbles
video	PRIMARY_SUBS_CODE	cc	Consolidated clay
video	PRIMARY_SUBS_CODE	cp	Cobble pavement
video	PRIMARY_SUBS_CODE	cpgp	Cobbles/Pavement, gravel/pavement
video	PRIMARY_SUBS_CODE	cp+ob	Cobble pavement and occasional boulders
video	PRIMARY_SUBS_CODE	d+rr	Diffuser and riprap
video	PRIMARY_SUBS_CODE	db	Diffuser base
video	PRIMARY_SUBS_CODE	di	Diffuser indent
video	PRIMARY_SUBS_CODE	dp	Diffuser port
video	PRIMARY_SUBS_CODE	ds	Diffuser side
video	PRIMARY_SUBS_CODE	dt	Diffuser top
video	PRIMARY_SUBS_CODE	g	Gravel
video	PRIMARY_SUBS_CODE	gp	Gravel pavement
video	PRIMARY_SUBS_CODE	mm	Man-made rocks
video	PRIMARY_SUBS_CODE	mx	Mix
video	PRIMARY_SUBS_CODE	null	No primary substrate code given
video	PRIMARY_SUBS_CODE	rr	Riprap
video	PRIMARY_SUBS_CODE	s	Sediment (sand)
video	RELIEF_CODE	h	High
video	RELIEF_CODE	l	Low
video	RELIEF_CODE	l-lm	Low to moderately low
video	RELIEF_CODE	lm	Moderately low
video	RELIEF_CODE	l-m	Low to moderate
video	RELIEF_CODE	lm-m	Moderately low to moderate
video	RELIEF_CODE	m	Moderate
video	RELIEF_CODE	mh	Moderately high
video	RELIEF_CODE	m-h	Moderate to high
video	RELIEF_CODE	mh-h	Moderately high to high
video	RELIEF_CODE	m-mh	Moderate to moderately high
video	SED_DRAPE_CODE	c	Clean

<sup>1</sup> Parameter codes (type of organism) are too numerous to list; they are in the database.

<sup>2</sup> In the video images, the substrate codes are used in combination to denote the range of substrates encountered. The order in which the codes appear indicates which is more common during the video clip. For example, ‘cp+mx’ indicates ‘Cobble pavement and mix, more cobble pavement’; ‘sg’ indicates ‘sediment and gravel’ where these two substrates appear in approximately equal proportions. Only the “base” substrate codes, and a few that don’t follow the regular convention, are listed in the table.

Table 19 continued.

Type of Data	Code Type	Code	Description
Video	SED_DRAPE_CODE	c-l	Clean to light
Video	SED_DRAPE_CODE	c-m	Clean to moderate
Video	SED_DRAPE_CODE	c-vl	Clean to very light
Video	SED_DRAPE_CODE	h	Heavy
Video	SED_DRAPE_CODE	l	Light
Video	SED_DRAPE_CODE	l-h	Light to heavy
Video	SED_DRAPE_CODE	l-lm	Light to moderately light
Video	SED_DRAPE_CODE	lm	Moderately light
Video	SED_DRAPE_CODE	l-m	Light to moderate
Video	SED_DRAPE_CODE	l-mh	Light to moderately heavy
Video	SED_DRAPE_CODE	lm-h	Lightly moderate to heavy
Video	SED_DRAPE_CODE	lm-m	Moderately light to moderate
Video	SED_DRAPE_CODE	lm-mh	moderately light to moderately heavy
Video	SED_DRAPE_CODE	m	Moderate
Video	SED_DRAPE_CODE	mh	Moderately heavy
Video	SED_DRAPE_CODE	m-h	Moderate to heavy
Video	SED_DRAPE_CODE	mh-h	Moderately heavy to heavy
Video	SED_DRAPE_CODE	m-mh	Moderate to moderately heavy
Video	SED_DRAPE_CODE	vh	Very heavy
Video	SED_DRAPE_CODE	vl	Very light
Video	SUSP_MATTER_CODE	h	High
Video	SUSP_MATTER_CODE	mh	Moderate to high
Video	SUSP_MATTER_CODE	vh	Very high
analysis of video	VALUE	a	Abundant
analysis of video	VALUE	c	Common
analysis of video	VALUE	f	Few
analysis of video	VALUE	r	Rare
analysis of video	VALUE	va	Very abundant

**Table 20. Descriptions of Other Database Codes used in Benthic Monitoring.**

Field Name	Code	Description
ANAL_LAB_ID	COV	Cove Corporation
ANAL_LAB_ID	DIL	MWRA Dept of Lab Services Central Lab
DEPTH_UNIT_CODE	m	Meters
DEPTH_UNIT_CODE	cm	Centimeters
GEAR_CODE	SPI_DIGI	Hulcher Model Minnie Sediment Profile Camera System with Digital Camera
GEAR_CODE	VV01	0.1-m <sup>2</sup> Young-Modified van Veen Grab
GEAR_CODE	VV04	0.04-m <sup>2</sup> Young-modified van Veen Grab
INSTR_CODE	MICR	Microscope
INSTR_CODE	RULER	Measurement by ruler
MATRIX_CODE	SED	Sediment
METH_CODE	ENUM	Enumeration
METH_CODE	WILL02	Williams et al. 2002 Benthic QA Plan
SAMP_VOL_UNIT_CODE	m3	Cubic meter
UNIT_CODE	0.04 m2	Units associated with a van Veen grab, gear_type of VV04
UNIT_CODE	cm	Centimeters
VAL_QUAL	A	Value above maximum detection limit, <i>e.g.</i> , too numerous to count or beyond range of instrument. DETECT_LIMIT is the maximum detection limit or maximum penetration depth for SPI RPD measurements.
VAL_QUAL	F	Abundance recorded for a fraction or portion of the sample collected
VAL_QUAL	P	Present but uncountable, value given is NULL
VAL_QUAL	a	Usable non-detect result; not detected at or above the method detection limit (MDL). Database value input as null or negative. DETECT_LIMIT is the MDL.
VAL_QUAL	d	Accuracy does not meet data quality objectives.
VAL_QUAL	e	Results not reported, value given is NULL. Explanation in COMMENTS field
VAL_QUAL	p	Lab sample bottles mislabeled - caution data use.
VAL_QUAL	q	Possibly suspect/invalid and not fit for use. Investigation pending.
VAL_QUAL	r	Precision does not meet data quality objectives.
VAL_QUAL	s	Suspect/Invalid. Not fit for use. Explanation in COMMENTS field
VAL_QUAL	w	This datum should be used with caution, see comment field.
SPEC_QUAL	G	Fragment
SPEC_QUAL	J	Juvenile (unspecified stage)
SPEC_QUAL	X	Complex

**Table 21. Data Report Quality Control Checks – Benthic Area**

<b>Parameter</b>	<b>Nearfield</b>	<b>Farfield</b>	<b>Harbor</b>
Infauna	Plot % identified to species ("good" vs. total individuals) vs. time <ul style="list-style-type: none"><li>• for all species</li><li>• for major taxonomic groups: Arthropoda, Mollusca, Oligochaeta, Polychaeta, all others</li><li>• harbor and bay separately</li></ul>		
SPI	Range check each quantitative variable. Min, Max, Avg. by variable for event.		

## C. ASSESSMENT AND OVERSIGHT

### C1. ASSESSMENT AND RESPONSE ACTIONS

This section identifies the number, frequency, and type of planned assessment activities that will be performed to assure implementation of this QAPP for HOM benthic monitoring. These activities will be overseen by the Normandeau QA Officer, Mr. Robert Hasevlat.

#### C1.1 Assessments

##### C1.1.1 *Field Sampling Readiness Reviews*

Each field survey plan (Section A9.4.2) will include checklists for required supplies and equipment. Examples are shown in Tables 22 and 23.

##### C1.1.2 *Field Sampling Technical System Audit*

The Project QA Officer and/or Normandeau Survey Task Leader will be responsible for periodic internal Technical Surveillance Audits (TSAs) to verify that field sampling procedures and measurements are properly followed. The internal field audit checklist (Table 24) will include examination of the following:

- Field sampling records
- Sample collection, handling, and packaging procedures
- QA procedures
- Chain-of-custody
- Sample documentation

Results of internal field TSAs will be documented in the QA reports to the Normandeau Program Manager. (Section C2).

##### C1.1.3 *Fixed Laboratory Technical System Audits*

System audits are performed as described in each laboratory's QA manual for internal auditing. Laboratory audits may be conducted by Normandeau at project start up and then periodically as part of its analytical subcontractor monitoring program. The laboratory audit checklist (Table 25) will review the following:

- QA organization and procedures
- Personnel training and qualifications
- Sample log-in procedures
- Sample storage facilities
- Analyst technique
- Adherence to laboratory SOPs and this QAPP
- Compliance with QA/QC objectives
- Instrument calibration and maintenance
- Facility security
- Waste management
- Data recording, reduction, review, reports, and archival
- Cleanliness and housekeeping

**Table 22. Harbor Traditional Survey Supply Checklist**

Survey Item	Ordered	Need to Order for Next Survey
<input type="checkbox"/> formalin (+SDS Safety sheet)		
<input type="checkbox"/> sieves (4, each at 300 micron)		
<input type="checkbox"/> metal pans (2)		
<input type="checkbox"/> glass bowls for homogenizing (2)		
<input type="checkbox"/> filter units (2)		
<input type="checkbox"/> hoses		
<input type="checkbox"/> connections		
<input type="checkbox"/> filters		
<input type="checkbox"/> squirt bottles		
<input type="checkbox"/> forceps, spoons		
<input type="checkbox"/> Borax		
<input type="checkbox"/> Solvents: Ethanol + hazardous waste container		
<input type="checkbox"/> electrical tape, clear packing tape		
<input type="checkbox"/> scissors		
<input type="checkbox"/> funnels		
<input type="checkbox"/> pens/pencils		
<input type="checkbox"/> ruler		
<input type="checkbox"/> syringes		
<input type="checkbox"/> hose (siphon)		
<input type="checkbox"/> Grabs- (2), 0.04-m <sup>2</sup> van Veen		
<input type="checkbox"/> 1 wooden stand		
<input type="checkbox"/> holder for each grab (2)		
<input type="checkbox"/> wooden discs for the bottom of the grab (2)		
<input type="checkbox"/> weights for the grab		
<input type="checkbox"/> Sieve Tables (2)		
<input type="checkbox"/> Buckets (4)		
<input type="checkbox"/> bucket rockers (2)		
<input type="checkbox"/> Containers:		
<input type="checkbox"/> Infauna (various)_____		
<input type="checkbox"/> TOC (4 oz glass jars (125 ml))_____		
<input type="checkbox"/> GS (8 oz glass jars (250 ml))_____		
<input type="checkbox"/> <i>C. perfringens</i> (sterile sample bottle)_____		
<input type="checkbox"/> survey logbook		
<input type="checkbox"/> soap and brush for cleaning the grab		
<input type="checkbox"/> zip ties in various sizes		
<input type="checkbox"/> Coolers for sample transport		
<input type="checkbox"/> Blue ice for the <i>C. perfringens</i> samples		
<input type="checkbox"/> Spare belts for the water pump		



**Table 23. Field Safety and Equipment Checklist.**

FIELD SAFETY AND EQUIPMENT CHECKLIST																																																							
<p><b>FIELD SAFETY CHECKLIST</b></p> <p>Date of Survey _____</p> <p>Project No. _____</p> <p>Type of work:</p> <p style="padding-left: 20px;">Sample collecting</p> <p style="padding-left: 40px;">Landbased <input type="checkbox"/></p> <p style="padding-left: 40px;">Waterbased <input type="checkbox"/></p> <p style="padding-left: 20px;">Mooring operations <input type="checkbox"/></p> <p style="padding-left: 20px;">Dive operations <input type="checkbox"/></p> <p style="padding-left: 20px;">Towed sampling <input type="checkbox"/></p> <p style="padding-left: 20px;">Navigation <input type="checkbox"/></p> <p style="padding-left: 20px;">Other: _____ <input type="checkbox"/></p> <p>Type of sample collected:</p> <p style="padding-left: 20px;">Water <input type="checkbox"/></p> <p style="padding-left: 20px;">Sediment <input type="checkbox"/></p> <p style="padding-left: 20px;">Sludge <input type="checkbox"/></p> <p style="padding-left: 20px;">Raw sewerage <input type="checkbox"/></p> <p style="padding-left: 20px;">Dredge materials <input type="checkbox"/></p> <p style="padding-left: 20px;">Living organisms <input type="checkbox"/></p> <p style="padding-left: 20px;">Marine debris <input type="checkbox"/></p> <p style="padding-left: 20px;">Electronic data <input type="checkbox"/></p> <p style="padding-left: 20px;">Other: _____ <input type="checkbox"/></p> <p style="padding-left: 20px;">Y <input type="checkbox"/> N <input type="checkbox"/></p> <p>*Do samples impose a health risk? <input type="checkbox"/> Y <input type="checkbox"/> N</p> <p>If yes, what kind of hazard:</p> <p style="padding-left: 20px;">Chemical <input type="checkbox"/> <input type="checkbox"/></p> <p style="padding-left: 20px;">Biological <input type="checkbox"/> <input type="checkbox"/></p> <p style="padding-left: 20px;">Radioactive <input type="checkbox"/> <input type="checkbox"/></p> <p style="padding-left: 20px;">Other _____ <input type="checkbox"/></p> <p>Specify Hazard: _____</p> <p>* (or fixatives / additives used w/ samples)</p> <p>Is there a spill response plan? <input type="checkbox"/> <input type="checkbox"/></p> <p>Is one necessary? <input type="checkbox"/> <input type="checkbox"/></p> <p>Are immunizations necessary? <input type="checkbox"/> <input type="checkbox"/></p> <p>Will electrical equipment be used by staff? <input type="checkbox"/> <input type="checkbox"/></p> <p>Will electrical equipment be used on deck? <input type="checkbox"/> <input type="checkbox"/></p> <p>Will ground fault interrupt (GFI) be used? <input type="checkbox"/> <input type="checkbox"/></p> <p>Will electrical equipment be checked-out before survey? <input type="checkbox"/> <input type="checkbox"/></p> <p>List type of sampling equipment to be used: _____</p> <p>Do all members of the survey party have appropriate field experience? <input type="checkbox"/> <input type="checkbox"/></p> <p>Is training necessary before the survey? <input type="checkbox"/> <input type="checkbox"/></p> <p>Will there be lifting of heavy objects? <input type="checkbox"/> <input type="checkbox"/></p> <p>Are all members of survey party familiar with safe lifting practices? <input type="checkbox"/> <input type="checkbox"/></p> <p>Reviewed and approved _____</p> <p>Task Leader _____ Date _____</p> <p>Chief Scientist _____ Date _____</p> <p>Dept Manager _____ Date _____</p>	<p><b>FIELD SAFETY EQUIPMENT CHECKLIST</b></p> <p>Check equipment needed for survey</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 80%;"></th> <th style="width: 10%; text-align: center;">Tech Staff</th> <th style="width: 10%; text-align: center;">Lab Staff</th> </tr> </thead> <tbody> <tr><td>Hard Hats**</td><td></td><td></td></tr> <tr><td>Work Vests**</td><td></td><td></td></tr> <tr><td>Life Raft</td><td></td><td></td></tr> <tr><td>EPIRB</td><td></td><td></td></tr> <tr><td>First Aid Kit</td><td></td><td></td></tr> <tr><td>Cold Weather Suits</td><td></td><td></td></tr> <tr><td>Safety Glasses</td><td></td><td></td></tr> <tr><td>Work Gloves</td><td></td><td></td></tr> <tr><td>Tyvek Suits</td><td></td><td></td></tr> <tr><td>Radiation Detector</td><td></td><td></td></tr> <tr><td>Respirators</td><td></td><td></td></tr> <tr><td>Air Hood</td><td></td><td></td></tr> <tr><td>Face Shields</td><td></td><td></td></tr> <tr><td>Lab Coats</td><td></td><td></td></tr> <tr><td>Eye Wash</td><td></td><td></td></tr> <tr><td>Flash Lights</td><td></td><td></td></tr> <tr><td>Spill Response Kit</td><td></td><td></td></tr> </tbody> </table> <p>** Required for surveys using vessels</p> <p>Survey Party:</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p>		Tech Staff	Lab Staff	Hard Hats**			Work Vests**			Life Raft			EPIRB			First Aid Kit			Cold Weather Suits			Safety Glasses			Work Gloves			Tyvek Suits			Radiation Detector			Respirators			Air Hood			Face Shields			Lab Coats			Eye Wash			Flash Lights			Spill Response Kit		
	Tech Staff	Lab Staff																																																					
Hard Hats**																																																							
Work Vests**																																																							
Life Raft																																																							
EPIRB																																																							
First Aid Kit																																																							
Cold Weather Suits																																																							
Safety Glasses																																																							
Work Gloves																																																							
Tyvek Suits																																																							
Radiation Detector																																																							
Respirators																																																							
Air Hood																																																							
Face Shields																																																							
Lab Coats																																																							
Eye Wash																																																							
Flash Lights																																																							
Spill Response Kit																																																							

**Table 24. Example of Internal Field TSA Checklist**

<b>Project:</b>	
<b>Site Location:</b>	
<b>Auditor:</b>	
1. Was project-specific training held?	
2. Are copies of project plan (Survey Plan, QAPP) on site and available to personnel?	
3. Are samples being collected in accordance with the project plan?	
4. Do the numbers and locations of samples conform to the project plan?	
5. Are sample locations staked or otherwise marked?	
6. Are samples labeled in accordance with the project plan?	
7. Is equipment decontamination in accordance with the project plan?	
8. Is field instrumentation being operated and calibrated in accordance with the project plan?	
9. Are samples being preserved and containerized in accordance with the project plan?	
10. Are QC samples in accordance with the types, collection procedures, and frequencies specified in the project plan?	
11. Are chain-of-custody procedures and documents in conformance with the project plan?	
12. Are field records complete, accurate, up-to-date, and in conformance to good recordkeeping procedures?	
13. Are modifications to the project plan being communicated, approved, and documented appropriately?	
Additional Comments:	
<b>Auditor:</b>	<b>Date:</b>

**Table 25. Example of Laboratory Audit Checklist**

<b>Project:</b>	
<b>Facility Location:</b>	
<b>Auditor:</b>	
Is there a written QA Program Plan/Manual?	
Is there a designated QA Officer?	
Are facilities and equipment adequate to perform the analyses of interest?	
Review procedures and engineering controls for minimizing cross contamination.	
Review most recent inter-laboratory performance evaluation sample results and recent Agency audits.	
Review SOP system. Review techniques for conformance to approved SOPs.	
Are personnel qualified and trained? Is there a formal training program and are records of training and proficiency maintained?	
Is there a designated sample custodian? Is there a sample inspection checklist? Are sample log-in procedures defined in an SOP?	
Is the laboratory area secure?	
Review internal chain-of-custody procedures.	
Are instruments operated and calibrated in accordance with SOPs? Are records of calibration maintained?	
Is equipment maintained according to written protocols? Are routine and non-routine maintenance procedures documented?	
Are samples being analyzed in conformance to the cited methods?	
Are QC samples and checks being performed at the frequencies stated in the cited methods?	
Are records complete, accurate, up-to-date, and in conformance to good recordkeeping procedures?	
How are project-specific requirements communicated to the bench level?	
Review data reduction, review, and reporting processes.	
Review data archival process (paper and electronic).	
Review audit and corrective action program.	
Additional Comments:	
<b>Auditor:</b>	<b>Date:</b>

Preliminary results of the systems audit will be discussed with the Laboratory management staff. A written report that summarizes audit findings and recommends corrective actions will be prepared and submitted to the Laboratory Director for response and to the Normandeau Program Manager. The results of the audit, including resolution of any deficiencies, will be included in the QA reports to management, as described in Section C2.

#### **C1.1.4 Performance Evaluation Sample Assessment**

Proficiency testing for infaunal taxonomic analyses is accomplished through regular communication and inter-calibration of infaunal samples among taxonomists.

#### **C1.1.5 Data Technical System Audits**

Data will be audited under the direction of the Project QA Officer for 100% of the packages received as part of the data validation process (Section D.1). Raw data will be reviewed for completeness and proper documentation. Errors noted in data audits will be communicated to analysts and project management and corrected data will be verified. Audits of the data collection procedures at subcontractor laboratories will be the responsibility of the subcontractor laboratories. Each subcontractor is fully responsible for the verification and validation of the data it submits. Data must be submitted in QAPP-prescribed formats; no other formats will be acceptable. During the time that work is in progress, the subcontractor QA Officer or his/her designee will conduct an inspection to evaluate the laboratory data-production process. All data must be reviewed by the subcontractor QA Officer prior to submission to the Normandeau Data Manager and must be accompanied by a signed QA statement that describes the types of audits and reviews conducted, the results, any outstanding issues that could affect data quality, and a narrative of activities.

### **C1.2 Assessment Findings and Corrective Action Responses**

All technical personnel share responsibility for identifying and resolving problems encountered in the routine performance of their duties. Issues that affect the schedule, cost, or performance of project tasks will be reported to Mr. Eric Nestler, Normandeau's Project Manager. He will be accountable to MWRA and to Normandeau management for overall conduct of the Harbor and Outfall Benthic Monitoring Project, including the schedule, costs, and technical performance. Mr. Nestler will be responsible for identifying and resolving problems that (1) have not been addressed in a timely manner or successfully at a lower level, (2) influence multiple components of the project, or (3) require consultation with Normandeau management or with MWRA. He will be responsible for evaluating the overall impact of the problem on the project and for discussing corrective actions with the MWRA Benthic Monitoring Project Area Manager. He will also identify and resolve problems that necessitate changes to this QAPP. Problems identified by the Normandeau QA Officer, Mr. Robert Hasevlat, will be reported to Mr. Nestler and corrected as described in Section C2.

Corrective actions may result from planned audits or from unanticipated events that occur during the course of the project. Significant events that result in deviations from this QAPP will be recorded through Normandeau's "Extraordinary Event Non-Conformity" (EENC) reporting process. The appropriate corrective actions to address any such events will be assessed by Mr. Hasevlat in consultation with Mr. Nestler, and with MWRA. Mr. Hasevlat will generate and/or review all corrective actions required during the project and monitor their effectiveness in meeting project quality objectives. Mr. Nestler will review these issues on a monthly basis, but the QA Director will bring serious issues to Mr. Nestler's attention immediately. Mr. Nestler will report corrective actions to MWRA in quarterly QA/QC Corrective Action Logs.

Corrective action is the process of identifying, recommending, approving, and implementing measures to counter unacceptable procedures or out-of-limit QC performance that can affect data quality. Corrective action can occur during field activities, laboratory analyses, data validation, and data assessment. All corrective action proposed and implemented should be documented in the QA reports to management (Section C2). Corrective action should only be implemented after approval by the Normandeau Program Manager, or his designee.

#### **C1.2.1 Field Corrective Action**

Corrective action in the field may be needed when the sample frequency is changed (*i.e.*, more/fewer samples, sample locations other than those specified in the QAPP), or when sampling procedures and/or field analytical procedures require modification due to unexpected conditions. The field team may identify the need for corrective action. The MWRA Benthic Monitoring Project Area Manager, Normandeau Program Manager, and Project QA Officer will approve the corrective measure. The Chief Scientist will ensure that the field team implements the corrective action.

Corrective action resulting from internal field audits will be implemented immediately if data may be adversely affected due to unapproved or improper use of approved methods. The QA auditor will identify deficiencies and recommend corrective action to the Chief Scientist. The Chief Scientist and field team will perform implementation of corrective actions. Corrective action will be documented in QA reports to the project management team (Section C2).

Corrective actions will be implemented and documented as follows:

- A description of the circumstances that initiated the corrective action
- The action taken in response
- The final resolution
- Any necessary approvals
- Effectiveness of corrective action

No staff member will initiate corrective action without prior communication of findings through the proper channels. If at any time a corrective action issue which directly impacts the project DQOs is identified, the MWRA Benthic Monitoring Project Area Manager will be notified.

#### **C1.2.2 Laboratory Corrective Action**

Corrective action in the laboratory is specified in laboratory SOPs and may occur prior to, during, and after initial analyses. Conditions, such as broken sample containers, may be identified during sample log-in or analysis. Following consultation with laboratory analysts and supervisory personnel, it may be necessary for the subcontractor QA Manager to approve the implementation of a corrective action. If the problem makes it impossible to achieve project objectives, the Normandeau Laboratory Task Manager will be notified, who will in turn notify the Normandeau Program Manager. The Normandeau Program Manager will communicate with the MWRA Benthic Monitoring Project Area Manager and other members of the project team, as necessary. The MWRA Benthic Monitoring Project Area Manager will also be notified in those cases where the nonconformance affects the achievement of the project DQOs.

These corrective actions will be performed prior to release of the data from the laboratory. The corrective action will be documented in both the laboratory's corrective action files, and in the narrative data report generated by the laboratory. If the corrective action does not rectify the situation, the laboratory will contact the Normandeau Laboratory Task Manager, who will determine the action to be taken and inform the appropriate personnel.

### **C1.2.3 Corrective Action during Data Validation and Data Assessment**

The need for corrective action may be identified during either data validation or data assessment. Potential types of corrective action may include re-sampling by the field team or reanalysis of samples by the laboratory. These actions are dependent upon the ability to mobilize the field team and whether the data to be collected are necessary to meet the required QA objectives. If the data validator or data assessor identifies a corrective action situation that impacts the achievement of the project objectives, the Normandeau Program Manager will be responsible for informing the appropriate personnel, including the MWRA Benthic Monitoring Project Area Manager.

## **C2. REPORTS TO MANAGEMENT**

QA reports will be prepared by the Normandeau Project QA Officer and submitted on an as-needed basis to the Normandeau Program Manager. QA reports will document any problems identified during the sampling and analysis programs and the corrective measures taken in response. The QA reports will include:

- All results of field and laboratory audits
- Problems noted and actions taken during data validation and assessment
- Significant QA/QC problems, recommended corrective actions, and the outcome of corrective actions

A summary of QA issues, audit findings, and significant non-conformances will be included in the quarterly QA/QC Corrective Action Logs submitted to the MWRA.

## **D. DATA VALIDATION AND USABILITY**

This section details the QA activities that will be performed to ensure that the collected data are scientifically defensible, properly documented, of known quality, and meet project objectives. Two steps are completed to ensure that project data quality needs are met:

- Data verification/validation
- Data usability assessment

### **D1. DATA REVIEW, VERIFICATION, AND VALIDATION**

#### **D1.1 Field Data**

The field data verification includes verification of sampling design, sample collection procedures, and sample handling. Field data will be reviewed daily by the Normandeau Chief Scientist to ensure that the records are complete, accurate, and legible and to verify that the sampling procedures are in accordance with the protocols specified in the QAPP (refer to Section D2.1 for the specific elements reviewed).

#### **D1.2 Laboratory Data**

Prior to the release of any data from the laboratory, the data will be reviewed and approved by laboratory personnel. The review will consist of a tiered approach (Section D2.2) that will include reviews by the person performing the work, by a qualified peer, and by supervisory and/or QA personnel.

Validation of the analytical data produced by DLS is not included in the scope of this contract.

#### **D1.3 Data Management**

The review process will include verification of manually entered data and QC checks run in SAS prior to exporting the data to MWRA. Detailed descriptions of these processes are included in Sections B10 and D2.

## **D2. VALIDATION AND VERIFICATION METHODS**

#### **D2.1 Field Data**

Field records will be reviewed by the Chief Scientist to ensure that:

- Logbooks and standardized forms have been filled out completely and that the information recorded accurately reflects the activities that were performed
- Records are legible and in accordance with good recordkeeping practices, *i.e.*, entries are signed and dated, data are not obliterated, changes are initialed, dated, and explained
- Equipment calibration, sample collection, handling, preservation, storage, and shipping procedures were conducted in accordance with the protocols described in the QAPP, and that any deviations were documented and approved by the appropriate personnel

#### **D2.2 Laboratory Data**

As a part of data validation, each benthic team laboratory will ensure that:

- The QC checks specified in Sections A7 and B5 were conducted and met the acceptance criteria
- All data that are hand-entered (*i.e.*, typed) will be 100% validated by qualified personnel prior to use in calculations or entry into the database
- All manual calculations will be performed by a second staff member to verify that calculations are accurate and appropriate
- Calculations performed by software will be independently verified at a frequency sufficient to ensure that the formulas are correct, appropriate, and consistent, and that calculations are accurately reported

Once data have been generated and compiled in the laboratory, Senior Scientists in each laboratory will review the data to identify and make professional judgments about any suspicious values. All suspect data will be reported, but flagged with a qualifier. These data may not be used in calculations or data summaries without the review and approval of the appropriate Senior Scientist. No data measurements will be eliminated from the reported data or database and data gaps will never be filled with other existing data. The loss of any samples during shipment or analysis will be documented in the dataset package submitted to the MWRA and noted in the database.

### **D2.3 Data Management**

Laboratory data will be reviewed by Normandeau prior to the electronic submission to MWRA. Data review may include methods such as plots, logical checks, and range checks to identify suspect values. Routine system back-ups are performed daily. Data provided electronically to facilitate data handling will be verified against the hard copy data. Additional review of the data by Normandeau will take place after MWRA exports the data as a data report to verify that all data has been entered correctly in the EM&MS database. Detailed description of data management and review is provided in section B10 of this QAPP.

### **D2.4 Project Deliverables**

Upon completion of the verification/validation process, a dataset package will be prepared for submittal to MWRA. This documentation will include the following elements required for HOM benthic monitoring and as listed in Section A9.4.

- Cover letter describing any problems
- List of problems encountered and corrective action taken
- List of samples/images planned vs. collected, or measurements planned vs. reported
- Quality Assurance Statement including a checklist of QA actions, and notes on deviations and corrective actions
- Table(s) of data submitted
- Exceptions report showing results of checks

## **D3. RECONCILIATION WITH USER REQUIREMENTS**

This element describes how the verified/validated project data will reconcile with the project DQOs, how data quality issues will be addressed, and how limitations on the use of the data will be reported and handled. The purpose of this section is to indicate the methods by which it will be ensured that the data collected for this investigation fall in line with the DQOs as described in Section A7 of this QAPP. To meet these DQOs, a combination of qualitative evaluations and statistical procedures will be used to



check the quality of the data. These procedures will be used by the laboratory generating the data, and by the Normandeau Data Management Team.

The data generated must meet the MWRA's needs as defined in the project DQOs defined in Section A7 of this QAPP. The primary objectives for assessing the usability of the data are to ensure that (1) data denote conditions in Boston Harbor and Massachusetts and Cape Cod Bays, (2) all datasets are complete and defensible, and (3) data are of the quality needed to meet the overall objectives of the MWRA.

### **D3.1 Comparison to Measurement Criteria**

#### **D3.1.1 Precision and Accuracy Assessment**

The accuracy and precision of the data generated during this program will be assessed by comparison to the DQOs specified in Section A7. Data that fail to meet the data quality criteria may necessitate sample reprocessing, analysis of archival material, sample recollection, or flagging of the data, depending on the magnitude of the nonconformance, logistical constraints, schedule, and cost.

#### **D3.1.2 Completeness Assessment**

Completeness is the ratio of the number of valid sample results to the total number of results planned for collection. The goal of this program is to generate valid, usable data. However, in environmental sampling and analysis, some data may be lost due to sampling location logistics, or field or laboratory errors. The overall completeness goal for the HOM Benthic Monitoring Program is 100% of planned samples to be collected and analyzed. The Normandeau Laboratory Task Manager will assess the completeness of the overall data generation against the project goals. Following completion of the sampling, analysis, and data review, the percent completeness will be calculated and compared to the project objectives stated in Section A7.2 using the following equation.

$$\% \text{ Completeness} = \frac{\text{Number of valid/usable results obtained}}{\text{Number of valid/usable results planned}} \times 100$$

If this goal is not met, data gaps may exist that will require evaluation to determine the effect on the intended use of the data. Sample re-analysis, analysis of archived material, and/or re-collection of the sample may be appropriate depending on criticalness of the missing data, logistical constraints, cost, and schedule.

#### **D3.1.3 Representativeness**

Representativeness expresses the degree to which data accurately and precisely denote a characteristic of a population, parameter variations at a sampling point, a process condition, or an environmental condition within a defined spatial and/or temporal boundary.

Representativeness of the field data will be assessed by verifying that the sampling program was implemented as proposed and that proper sampling techniques were used.

The assessment of representativeness in the laboratory will consist of verifying that the proper analytical procedures and appropriate methods were used.

### **D3.2 Overall Assessment of Environmental Data**

Data assessment will involve an evaluation to determine if the data collected are of the appropriate quality, quantity, and representativeness for the purposes required by the MWRA. This evaluation will be

performed by the Normandeau Program Manager in concert with other users of the data. Data generated in association with QC results that meet these objectives will be considered usable. Data that do not meet the objectives and/or the data validation criteria might still be usable. This assessment may require various statistical procedures to establish outliers, correlations between data sets, adequate sampling location coverage, etc., in order to assess the effect of qualification or rejection of data. The effect of the qualification of data or loss of data deemed unacceptable for use, for whatever reason, will be discussed and decisions made on corrective action for potential data gaps.

## E. REFERENCES

- Agresti, A. 1990. Categorical Data Analysis. John Wiley and Sons, New York, 558 pp.
- Clarke KR and RN Gorley. 2006. PRIMER v6: User Manual/Tutorial. PRIMER-E, Ltd. Plymouth, UK. 91 pp.
- Constantino J, Leo W, Delaney MF, Epelman P, Rhode S. 2014. Quality Assurance Project Plan (QAPP) for Sediment Chemistry Analyses for Harbor and Outfall Monitoring, Revision 4 (February 2014). Boston: Massachusetts Water Resources Authority. Report 2014-02. 46 p.
- Coughlin K. 2005. Summary of CSO receiving water quality monitoring in upper Mystic River/Alewife Brook and Charles River, 2004. Boston: Massachusetts Water Resources Authority. Report ENQUAD 2005-14. 35 pp.
- Emerson, DJ and VJ Cabelli. 1982. Extraction of *Clostridium perfringens* spores from bottom sediment samples. *Applied Environmental Microbiology* 44:1144–1149.
- EPA (U.S. Environmental Protection Agency). 1988. Boston Harbor Wastewater Conveyance System, Final Supplemental Environmental Impact Statement, U.S. Environmental Protection Agency, Region I. Boston, MA.
- EPA (U.S. Environmental Protection Agency). 1992. Monitoring Guidance for the National Estuary Program, Final. EPA Office of Water; Office of Wetlands, Oceans, and Watersheds, Ocean and Coastal Protection Division. EPA-503/8-91-002, Washington, D.C.
- EPA. (U.S. Environmental Protection Agency). 2001(reissued 2006). EPA Requirements for Quality Assurance Project Plans, March 2001, (EPA QA/R-5), EPA/240/B-01/003, United States Environmental Protection Agency, Washington, D.C., <http://www.epa.gov/quality/qs-docs/r5-final.pdf>.
- EPA. (U.S. Environmental Protection Agency). 2002. EPA Guidance for Quality Assurance Project Plans, December 2002, (EPA QA/G-5), EPA/240/R-02/009, United States Environmental Protection Agency, Washington, D.C.
- Folk, RL. 1974. *Petrology of Sedimentary Rocks*. Hemphill's, Austin, TX. 170 pp.
- Kelly JR and RK Kropp. 1992. Benthic recovery following sludge abatement in Boston Harbor: Part I Baseline survey 1991 and Part II Spring survey 1992. Technical report to MWRA Environmental Quality Department, November 1991. Massachusetts Water Resources Authority, Boston, MA. 45 + 29 pp.
- Maciolek, NJ, SA Doner, DT Dahlen, RJ Diaz, B Hecker, C Hunt, and WK Smith. 2008. Outfall Benthic Monitoring Interpretive Report: 1992–2007 Results. Boston: Massachusetts Water Resources Authority. Report 2008-20. 149 pages plus appendices.
- Magurran, AE. 1988. Ecological Diversity and its Measurement. Princeton University Press. Princeton, NJ. 179 pp.

- McDowell, S, JH, Ryther, Jr. and CS Albro. 1991. Field studies of Nut Island sewage plumes and background water properties in Boston Harbor: October–November 1990. Boston: Massachusetts Water Resources Authority. Report 1991-07. 179 pp.
- MWRA. 1991. Massachusetts Water Resources Authority Effluent Outfall Monitoring Plan Phase 1: Baseline Studies. Massachusetts Water Resources Authority, Boston, MA. 45 pp.
- MWRA. 1997a. Massachusetts Water Resources Authority effluent outfall monitoring plan: Phase II post-discharge monitoring. Boston: Massachusetts Water Resources Authority. Report ENQUAD ms-044. 61 pp.
- MWRA. 1997b. Massachusetts Water Resources Authority Contingency Plan. Boston: Massachusetts Water Resources Authority. Report ENQUAD ms-069. 41 pp.
- MWRA. 2001. Massachusetts Water Resources Authority Contingency Plan Revision 1. Boston: Massachusetts Water Resources Authority. Report ENQUAD ms-071. 47 pp.
- MWRA. 2004. Massachusetts Water Resources Authority effluent outfall ambient monitoring plan Revision 1, March 2004. Boston: Massachusetts Water Resources Authority. Report ms-092. 65 pp.
- MWRA. 2010. Ambient monitoring plan for the Massachusetts Water Resources Authority effluent outfall revision 2. July 2010. Boston: Massachusetts Water Resources Authority. Report 2010-04. 107 pp.
- MWRA. 2016. Combined Sewer Overflow Control Plan. Annual Progress Report 2015. March 2016. 58 pp.
- Nestler EC, RJ Diaz, AE Pembroke, and KE Keay. 2016. Outfall Benthic Monitoring Report: 2015 Results. Boston: Massachusetts Water Resources Authority. Report 2016-09. 33 pp. plus Appendices.
- Nestler, EC, AE Pembroke, and RC Hasevlat. 2011. Quality Assurance Project Plan for Benthic Monitoring 2011–2014. Boston: Massachusetts Water Resources Authority. Report 2011-07, 90 pp. plus Appendices.
- Nestler, EC, AE Pembroke, and RC Hasevlat. 2014. Quality Assurance Project Plan for Benthic Monitoring 2014–2017, Vision 1. Boston: Massachusetts Water Resources Authority. Report 2014-03, 92 pp. plus Appendices.
- Pembroke AE, RJ Diaz, and EC Nestler. 2016. Boston Harbor Benthic Monitoring Report: 2015 Results. Boston: Massachusetts Water Resources Authority. Report 2016-14. 38 pages.
- Rex, AC, D Wu, K Coughlin, MP Hall, KE Keay, and DI Taylor. 2002. The state of Boston Harbor: mapping the Harbor’s recovery. Boston: Massachusetts Water Resources Authority. Report 2002-09. 42 pp.
- Taylor, D. 2005. Pattern of wastewater, river and non-point source loading to Boston Harbor. 1995-2003. Boston: Massachusetts Water Resources Authority. Report ENQUAD 2005-08. 52 pp.

Taylor D. 2006. Update of patterns of wastewater, river and non-point source loadings to Boston Harbor (1990–2005). Boston: Massachusetts Water Resources Authority. Report 2006-22. 77pp

Viles C and RJ Diaz. 1991. Bencore, an image analysis system for measuring sediment profile camera slides. Virginia Institute of Marine Science, Gloucester Pt. VA. 13 pp.

Williams, IP, NJ Maciolek, JD Boyle, DT Dahlen, E Baptiste Carpenter. 2005. Combined work/quality assurance plan for benthic monitoring: 2003-2005. MWRA Environmental Quality Department Miscellaneous Report Number ms-097. Massachusetts Water Resources Authority, Boston, MA. 150 pp.

Zar, JH. 1999. Biostatistical Analysis. 4th ed., Prentice Hall, Upper Saddle River, New Jersey. 663 pp. plus appendices.

## **APPENDIX A**

### **MWRA Standard Operating Procedures (SOPs)**

**SOP-04 Calculation of Baseline and Test Values for  
the Benthic Diversity Indices and Opportunists  
at the Nearfield.**

**SOP-34 Calculation of the Annual Threshold Values for  
Sediment Toxic Contamination**

**SOP-35 Calculation of the Annual Threshold Value for  
Redox Potential Discontinuity Depth in Sediment**

**MWRA Environmental Quality Department**

**SOP-04**

**SOP-04: CALCULATION METHOD FOR BASELINE AND TEST VALUES FOR THE BENTHIC DIVERSITY INDICES AND OPPORTUNISTS AT THE NEARFIELD**

**Current Author(s):** Wendy Leo

**Last Reviewed:** 3/20/2017

**Purpose:** Calculation method for baseline and test values for the benthic diversity indices and opportunists at the nearfield.

**Revision History:**

3/30/2017	WSL	Drop UPPER thresholds per revision to the Contingency Plan approved by OMSAP and EPA. (No change to opportunists threshold.)
2/11/2015	WSL	Revision 3: Merge list is now managed by INFAUNA_REF_MERGE_VIEW which includes a merge group for thresholds, which will remain static although merges may be added/changed for harbor and bay data analyses other than thresholds. Correct the merge list, it should not include <i>Mediomastus</i> spp.
11/28/2011	WSL	Revision 2: a) Reduced station sets in the revised monitoring program (MWRA, 2010), are now used to calculate baseline and post-discharge results. b) Average per-sample diversity results by station first, then average over all nearfield stations to get annual value. c) Modified the merge list to reflect the recent species consolidation implemented in the database and a consolidated list of merges.
10/13/2004	WSL	Revision 1: a) Reduced station sets for even and odd year used in revised monitoring program (MWRA, 2004), are now used to calculate baseline and post-discharge results. b) Modified the merge list to reflect the recent species consolidation implemented in the database and the new merges per Ken Keay, Nancy Maciolek, Jim Blake, and Isabelle Williams.
1/9/2002	SYL	Original

**Distribution List:** Enquad Data Group, Enquad HOM Group

**Software/Connections/Permissions Required:** N/A

The contingency plan threshold comparisons for the nearfield benthic diversity indices and percent opportunists are performed each year. The diversity indices include total species, log-series alpha, Shannon-Wiener H', and Pielou's J'. The nearfield averages of the benthic diversity

indices and benthic opportunists are compared to the thresholds to determine if there is an exceedance. The table below shows the caution thresholds for the benthic diversity indices and benthic opportunists.

	Parameter	Threshold ID	Caution Level	Warning Level	Baseline Years	Baseline Method
All Years	Total species	SBDTOTMIN	42.99	-	1992-2000	Lower end of central 95th percentile of annual means.
	Fisher’s log-series alpha	SBDLOGMIN	9.42	-		
	Pielou’s J’	SBDPJMIN	0.57	-		
	Shannon-Wiener H’	SBDSWHMIN	3.37	-		
All years	Benthic Opportunists	SBO	10%	25%	NA	NA

Table 1: Benthic diversity indices and percent opportunist thresholds.

Data Source (Data from EM&MS database):

- The benthic infaunal data and sample information are obtained from the ABUNDANCE and SAMPLE tables.
- Taxa are classified as “good” (GOOD\_BAD = ‘G’, generally, identified to species), “bad” (GOOD\_BAD = ‘B’, identified only to a higher taxonomic level) or “worse” (GOOD\_BAD = ‘W’, non-infaunal taxa) in the INFAUNA\_REF\_MERGE\_VIEW view where merge\_group = ‘DIVERSITY’. Species classified as “worse” are excluded from calculation. “Worse” refers to pelagic, epifaunal, or colonial species.
- INFAUNA\_REF\_MERGE\_VIEW is based on INFAUNA\_REF, but with slight modifications to the “good-bad-worse” codes, and merging some species for analysis. These merges were previously done within the threshold script.

Data To Be Used In The Analysis:

- For all years, the following stations are used for baseline calculations and threshold testing: FF12, NF04, NF10, NF12, NF13, NF14, NF17, NF20, NF21, NF22, NF24. Not all stations were sampled in all years.
- There is one survey event in August each year, except that there are surveys in May and August 1992. Survey S9202 in May 1992 is excluded from the baseline calculations because the time of data collection and the sampling method are inconsistent with all other surveys.



- Data qualified as suspect/invalid (VAL\_QUAL contains ‘s’) and investigation pending (VAL\_QUAL contains ‘q’) are not used.
- Include only “good” species for benthic diversity index calculations, as defined in INFAUNA\_REF\_MERGE\_VIEW view where merge\_group = ‘DIVERSITY’. This is the same as INFAUNA\_REF with the following exceptions:
  1. Treat *Turbellaria* spp. 3901SPP as good
  2. Treat *Micrura* spp. 43030205SPP as good
- Include both “good” and “bad” species for calculating the percent benthic opportunists.
- Do not merge taxa in each sample with the following exceptions, which are stored in the INFAUNA\_MERGES table and INFAUNA\_REF\_MERGE\_VIEW view, merge\_group = ‘DIVERSITY’. As of 11/28/11 these are as follows:
  1. Merge *Cerianthus borealis* and Cerianthidae spp. with *Ceriantheopsis americanus*
  2. Merge *Pholoe tecta* with *Pholoe minuta*
  3. Merge *Leitoscoloplos* sp. B and *Leitoscoloplos* spp. with *Leitoscoloplos acutus*
  4. Merge *Apistobranchnus tullbergi* and *Apistobranchnus* spp. with *Apistobranchnus typicus*
  5. Merge *Chaetozone hystricosus* and *Chaetozone* spp. with *Chaetozone anasimus*
  6. Merge *Proclea* sp. 1 with *Proclea graffi*
  7. Merge Ascidiacea (solitary tunicate) and *Molgula* spp. with *Molgula manhattensis*
  8. Merge *Ampharete baltica* with *Ampharete acutifrons*
  9. Merge *Nereis* spp. with *Nereis grayi*
  10. Merge Munnidae spp. with *Munna* sp. 1.
- Do not merge genus spp. and species just because there is only one species found in that genus.
- The list of benthic opportunists includes the following:

Species	Species Code
<i>Polydora cornuta</i>	5001430448
<i>Capitella capitata complex</i>	5001600101
<i>Capitella</i> spp.	50016001SPP
<i>Streblospio benedicti</i>	5001431801
<i>Mulinia lateralis</i>	5515250301
<i>Ampelisca macrocephala</i>	6169020101
<i>Ampelisca abdita</i>	6169020108
<i>Ampelisca vadorum</i>	6169020109

### Data Aggregation:

- Calculate the benthic diversity indices and percent opportunists for each sample. These are defined as follows:
  - S = total distinct “good” species in the sample  
N = total number of “good” individuals in the sample  
N(i) = total number of “good” individuals in *i*th species
  - Sa = total distinct opportunist species in the sample  
Na = total number of individuals (include “good” and “bad” species) in the sample
1. Total species = S
  2. Log series alpha =  $N * (1-x)/x$   
where:  
x is defined by  $(x-1)/x * \ln(1-x) = S/N$ ,  
and is determined numerically with a look up table in which x varies from 0 to 1 in increments of 0.000001
  3. Shannon-Wiener  $H' = -\sum_{i=1}^S [(N(i)/N) * \log_2(N(i)/N)]$
  4. Pielous  $J' = H'/\log_2(S)$
  5. Benthic opportunists =  $(Sa/Na) * 100\%$
- The diversity measures for each sample at a station are averaged to get a value for each station during each summer survey.
  - Calculate the yearly means of benthic diversity indices and percent opportunists using all station averages from each year.

### Baseline Calculation:

- The distribution of the nine yearly means for each benthic diversity index was determined to be normal using Shapiro-Wilk test for normality.
- The central 95th percentiles for these thresholds were calculated using:  
Upper threshold<sup>3</sup> = baseline mean + 1.96\*(baseline standard deviation)  
Lower threshold = baseline mean - 1.96\*(baseline standard deviation)
- Benthic opportunist threshold is not based on baseline values.

---

<sup>3</sup> No longer used for threshold testing, March 2017

### Threshold Testing:

- For each post-discharge even year, the average for the one (August) survey is compared against the caution and/or warning thresholds. If the average of any benthic diversity index is greater than the upper threshold or smaller than the lower threshold, there is an exceedance for that year. If the average of benthic opportunists is greater than the threshold, there is an exceedance for that year.

### References:

MWRA. 2010. Massachusetts Water Resources Authority effluent outfall ambient monitoring plan Revision 2, July, 2010. Boston: Massachusetts Water Resources Authority. Report 2010-04. 107 p.

MWRA Environmental Quality Department

SOP-34

**Calculation methods for threshold values**  
**for sediment toxic contamination**

---

**Current Author(s):** Wendy Leo, Doug Hersh

**Last Updated:** March 14, 2012

**Purpose:** Calculation method for baseline and test values for the nearfield sediment toxic contaminant thresholds.

---

**Revision History:**

4/3/02	WSL, DH	Wrote SOP.
11/26/08	WSL	Modified the date range to include July, since the summer survey sometimes takes place at the end of July rather than in August.
6/30/10	WSL	Removed “annual” from the name and modified text to clarify that these thresholds are tested only when all nearfield stations are sampled, currently every three years.
5/15/11	WSL	Updated for change in stations in revised monitoring plan (drop stations FF10, FF13, NF02, NF05, NF07, NF08, NF09, NF15, NF16, NF18, NF19, and NF23).
3/14/12	WSL	As for infaunal thresholds, calculate station average first, then average all nearfield station averages in a summer to get the annual average.

---

**Software/Connections/Permissions Required:** N/A

---

This SOP summarizes the methods used to calculate the baseline values of sediment contaminants and to compare the nearfield average to the threshold.

There are 26 thresholds related to toxic contaminants in sediments, based on NOAA Effects Range-Median sediment guidelines. The thresholds for DDT, PCB, LMWPAH, HMWPAH, and total PAH are based on the sum of concentrations of several chemicals.

Parameter	Threshold ID	Testing area	Caution Level	Warning Level	Units	Baseline Years <sup>4</sup>	Averaging Method
acenaphthene	STNANP	Nearfield	-	500	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
acenaphthylene	STNAPTH	Nearfield	-	640	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
anthracene	STNARC	Nearfield	-	1100	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
benz(a)-anthracene	STNBAA	Nearfield	-	1600	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
benzo(a)pyrene	STNBAP	Nearfield	-	1600	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
chrysene	STNCHR	Nearfield	-	2800	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
dibenzo(a,h)-anthracene	STNDBA	Nearfield	-	260	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
fluoranthene	STNFLT	Nearfield	-	5100	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
fluorene	STNFLU	Nearfield	-	540	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
naphthalene	STNNAP	Nearfield	-	2100	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
phenanthrene	STNPHN	Nearfield	-	1500	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
pyrene	STNPYR	Nearfield	-	2600	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
sum HMWPAH	STNHPAH	Nearfield	-	9600	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
sum LMWPAH	STNLPAH	Nearfield	-	3160	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
total PAH	STNTPAH	Nearfield	-	44792	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
p,p'-DDE	STNDDE	Nearfield	-	27	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
total DDT	STNTDDT	Nearfield	-	46.1	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
total PCB	STNTPCB	Nearfield	-	180	ng/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean

Table 1: Sediment Contamination Thresholds (continued on next page).

<sup>4</sup> 2000 is not included because only a few stations were sampled for contaminants that year.

Parameter	Threshold ID	Testing area	Caution Level	Warning Level	Units	Baseline Years	Averaging Method
cadmium	STNCD	Nearfield	-	9.6	ug/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
chromium	STNCR	Nearfield	-	370	ug/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
copper	STNCU	Nearfield	-	270	ug/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
lead	STNPB	Nearfield	-	218	ug/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
mercury	STNHG	Nearfield	-	0.71	ug/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
nickel	STNNI	Nearfield	-	51.6	ug/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
silver	STNAG	Nearfield	-	3.7	ug/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean
zinc	STNZN	Nearfield	-	410	ug/g dry	1992-2000 (data avail. only in 1992-1995, 1999)	Arithmetic mean

Table 1: Sediment Contamination Thresholds (continued).

Data Source (Data from EM&MS database):

- Laboratory data from the Massachusetts Bay Soft Bottom Monitoring study for the parameters shown in table 2 for the various groups are used. These data are stored in the ANALYTICAL\_RESULTS table with supporting data in the BOTTLE and SAMPLE tables.
- Nearfield stations are specified as station IDs beginning with 'N', plus station FF12.
- There is one survey event, in July or August. From 2005 on the full set of nearfield stations is sampled every three years.

Threshold	Group (Group Code)	Parameter Code	Parameter Description	Parameter Abbreviation
acenaphthene	STNANP	83-32-9	ACENAPHTHENE	
acenaphthylene	STNAPTH	208-96-8	ACENAPHTHYLENE	
anthracene	STNARC	120-12-7	ANTHRACENE	
benz(a)anthracene	STNBAA	56-55-3	BENZ(A)ANTHRACENE	
benzo(a)pyrene	STNBAP	50-32-8	BENZO(A)PYRENE	
chrysene	STNCHR	218-01-9	CHRYSENE	
dibenzo(a,h)anthracene	STNDBA	53-70-3	DIBENZO(A,H)ANTHRACENE	
fluoranthene	STNFLT	206-44-0	FLUORANTHENE	
fluorene	STNFLU	86-73-7	FLUORENE	
naphthalene	STNNAP	91-20-3	NAPHTHALENE	
phenanthrene	STNPHN	85-0108	PHENANTHRENE	
pyrene	STNPYR	129-00-0	PYRENE	

Table 2: Sediment Contaminants included in each Threshold (continued on next page).

Threshold	Group (Group Code)	Parameter Code	Parameter Description	Parameter Abbreviation
sum HMWPAH	STNHPAH	56-55-3	BENZ(A)ANTHRACENE	
		50-32-8	BENZO(A)PYRENE	
		MWRA86	BENZO(B)/BENZO(K)FLUORANTHENE	
		205-99-2	BENZO(B)FLUORANTHENE	
		192-97-2	BENZO(E)PYRENE	
		191-24-2	BENZO(G,H,I)PERYLENE	
		207-08-9	BENZO(K)FLUORANTHENE	
		MWRA70	C1-CHRYSENES	
		MWRA69	C1-FLUORANTHRENES/PYRENES	
		MWRA4	C2-CHRYSENES	
		MWRA83	C2-FLUORANTHRENES/PYRENES	
		MWRA71	C3-CHRYSENES	
		MWRA84	C3-FLUORANTHRENES/PYRENES	
		MWRA72	C4-CHRYSENES	
		218-01-9	CHRYSENE	
		53-70-3	DIBENZO(A,H)ANTHRACENE	
		206-44-0	FLUORANTHENE	
		193-39-5	INDENO(1,2,3-C,D)PYRENE	
		198-55-0	PERYLENE	
		129-00-0	PYRENE	
sum LMWPAH	STNLPAH	83-32-9	ACENAPHTHENE	
		208-96-8	ACENAPHTHYLENE	
		120-12-7	ANTHRACENE	
		92-52-4	BIPHENYL	
		MWRA68	C1-DIBENZOTHIOPHENES	
		MWRA65	C1-FLUORENES	
		MWRA64	C1-NAPHTHALENES	
		MWRA67	C1-PHENANTHRENES/ANTHRACENES	
		MWRA5	C2-DIBENZOTHIOPHENES	
		MWRA6	C2-FLUORENES	
		MWRA7	C2-NAPHTHALENES	
		MWRA57	C2-PHENANTHRENES/ANTHRACENES	
		MWRA9	C3-DIBENZOTHIOPHENES	
		MWRA66	C3-FLUORENES	
		MWRA10	C3-NAPHTHALENES	
		MWRA52	C3-PHENANTHRENES/ANTHRACENES	
		MWRA11	C4-NAPHTHALENES	
		MWRA54	C4-PHENANTHRENES/ANTHRACENES	
		132-64-9	DIBENZOFURAN	
		127330-66-9	DIBENZOTHIOPHENE	
		86-73-7	FLUORENE	
		91-20-3	NAPHTHALENE	
		85-0108	PHENANTHRENE	

Table 2: Sediment Contaminants included in each Threshold (continued on next page).

Threshold	Group (Group Code)	Parameter Code	Parameter Description	Parameter Abbreviation
total PAH	STNTPAH	83-32-9	ACENAPHTHENE	
		208-96-8	ACENAPHTHYLENE	
		120-12-7	ANTHRACENE	
		56-55-3	BENZ(A)ANTHRACENE	
		50-32-8	BENZO(A)PYRENE	
		MWRA86	BENZO(B)/BENZO(K)FLUORANTHENE	
		205-99-2	BENZO(B)FLUORANTHENE	
		192-97-2	BENZO(E)PYRENE	
		191-24-2	BENZO(G,H,I)PERYLENE	
		207-08-9	BENZO(K)FLUORANTHENE	
		92-52-4	BIPHENYL	
		MWRA70	C1-CHRYSENES	
		MWRA68	C1-DIBENZOTHIOPHENES	
		MWRA69	C1-FLUORANTHRENES/PYRENES	
		MWRA65	C1-FLUORENES	
		MWRA64	C1-NAPHTHALENES	
		MWRA67	C1-PHENANTHRENES/ANTHRACENES	
		MWRA4	C2-CHRYSENES	
		MWRA5	C2-DIBENZOTHIOPHENES	
		MWRA83	C2-FLUORANTHRENES/PYRENES	
		MWRA6	C2-FLUORENES	
		MWRA7	C2-NAPHTHALENES	
		MWRA57	C2-PHENANTHRENES/ANTHRACENES	
		MWRA71	C3-CHRYSENES	
		MWRA9	C3-DIBENZOTHIOPHENES	
		MWRA84	C3-FLUORANTHRENES/PYRENES	
		MWRA66	C3-FLUORENES	
		MWRA10	C3-NAPHTHALENES	
		MWRA52	C3-PHENANTHRENES/ANTHRACENES	
		MWRA72	C4-CHRYSENES	
		MWRA11	C4-NAPHTHALENES	
		MWRA54	C4-PHENANTHRENES/ANTHRACENES	
		218-01-9	CHRYSENE	
		53-70-3	DIBENZO(A,H)ANTHRACENE	
		132-64-9	DIBENZOFURAN	
		127330-66-9	DIBENZOTHIOPHENE	
		206-44-0	FLUORANTHENE	
		86-73-7	FLUORENE	
		193-39-5	INDENO(1,2,3-C,D)PYRENE	
		91-20-3	NAPHTHALENE	
		198-55-0	PERYLENE	
85-0108	PHENANTHRENE			
129-00-0	PYRENE			

Table 2: Sediment Contaminants included in each Threshold (continued on next page).



Threshold	Group (Group Code)	Parameter Code	Parameter Description	Parameter Abbreviation
p,p'-DDE	STNDDE	75-55-9	P,P-DDE	4,4'-DDE
total DDT	STNTDDT	MWRA33	O,P-DDD	2,4'-DDD
		MWRA34	O,P-DDE	2,4'-DDE
		789-02-6	O,P-DDT	2,4'-DDT
		72-54-8	P,P-DDD	4,4'-DDD
		75-55-9	P,P-DDE	4,4'-DDE
		50-29-3	P,P-DDT	4,4'-DDT
total PCB	STNTPCB	34883-43-7	2,4'-DICHLOOROBIPHENYL	CL2(8)
		37680-65-2	2,2',5-TRICHLOROBIPHENYL	CL3(18)
		7012-37-5	2,4,4'-TRICHLOROBIPHENYL	CL3(28)
		41464-39-5	2,2',3,5'-TETRACHLOOROBIPHENYL	CL4(44)
		35693-99-3	2,2',5,5'-TETRACHLOOROBIPHENYL	CL4(52)
		32598-10-0	2,3',4,4'-TETRACHLOOROBIPHENYL	CL4(66)
		32598-13-3	3,3',4,4'-TETRACHLOOROBIPHENYL	CL4(77)
		37680-73-2	2,2',4,5,5'-PENTACHLOOROBIPHENYL	CL5(101)
		32598-14-4	2,3,3',4,4'-PENTACHLOOROBIPHENYL	CL5(105)
		31508-00-6	2,3',4,4',5-PENTACHLOOROBIPHENYL	CL5(118)
		57465-28-8	3,3',4,4',5-PENTACHLOOROBIPHENYL	CL5(126)
		38380-07-3	2,2',3,3',4,4'-HEXACHLOOROBIPHENYL	CL6(128)
		35065-28-2	2,2',3,4,4',5'-HEXACHLOOROBIPHENYL	CL6(138)
		35065-27-1	2,2',4,4',5,5'-HEXACHLOOROBIPHENYL	CL6(153)
		35065-30-6	2,2',3,3',4,4',5-HEPTACHLOOROBIPHENYL	CL7(170)
		35065-29-3	2,2',3,4,4',5,5'-HEPTACHLOOROBIPHENYL	CL7(180)
52663-68-0	2,2',3,4',5,5',6-HEPTACHLOOROBIPHENYL	CL7(187)		
52663-78-2	2,2',3,3',4,4',5,6-OCTACHLOOROBIPHENYL	CL8(195)		
40186-72-9	2,2',3,3',4,4',5,5',6-NONACHLOOROBIPHENYL	CL9(206)		
2051-24-3	DECACHLOOROBIPHENYL	CL10(209)		
cadmium	STNCD	7440-43-9	CADMIUM	Cd
chromium	STNCR	7440-47-3	CHROMIUM	Cr
copper	STNCU	7440-50-8	COPPER	Cu
lead	STNPB	7439-92-1	LEAD	Pb
mercury	STNHG	7439-97-6	MERCURY	Hg
nickel	STNNI	7440-02-0	NICKEL	Ni
silver	STNAG	7440-22-4	SILVER	Ag
zinc	STNZN	7440-66-6	ZINC	Zn

Table 2: Sediment Contaminants included in each Threshold (continued).

Data To Be Used In The Analysis:

- Baseline calculations and threshold testing are performed on the current group of “nearfield” stations (starting in 2011 this is eleven stations.)

- All data from years in which all stations were sampled are included. Exceptions are specified in the following:
  1. Data qualified as suspect/invalid (VAL\_QUAL contains 's'), investigation pending (VAL\_QUAL contains 'q'), and (VAL\_QUAL contains 'e'), above maximum detection limit (VAL\_QUAL='A') are not used. There are no 's' or 'q' qualified data in the current data set.
  2. Data qualified as below detection limit ('a' qualifier) are treated as zero values.

Data Aggregation:

- Laboratory analytical replicates, if any, are first averaged (bottle averages).
- Aggregate all sediment chemical measurements within a station (some years have multiple replicate samples per station). This is consistent with how the faunal data are analyzed and thresholds calculated.
- Annual averages for each parameter are calculated by averaging across all nearfield samples (or bottles) for a given year for each parameter.
- The annual values for DDT, PCB, and LMWPAH, HMWPAH, and total PAH are calculated by summing the annual averages of the parameters listed in table 2.

Baseline Calculation:

- The threshold is based on NOAA sediment guidelines, rather than baseline values. However, the threshold testing script can be run for any year in which the nearfield was sampled. Note that in August 2000 only a subset of nearfield stations were sampled for contaminants, so those data are not included in the baseline computations and caution must be used if comparing them to baseline or discharge averages of all nearfield data.

Threshold Testing (STN.SQL):

- For each post-discharge year in which all stations are sampled, the nearfield average is compared against the caution threshold in table 1. If the nearfield average is greater than the threshold, there is an exceedance for that year.

Data Group Manager:	<hr style="width: 80%; margin: 0 auto;"/> Wendy Leo <span style="float: right;">Date</span>
MWRA Scientist Responsible for sediment contaminant threshold	<hr style="width: 80%; margin: 0 auto;"/> Kenneth Keay <span style="float: right;">Date</span>

MWRA Environmental Quality Department

SOP-35

**Calculation methods for annual threshold value**  
**for redox potential discontinuity depth in sediment**

**Current Author(s):** Wendy Leo

**Last Updated:** October 19, 2001

**Purpose:** Summarizes the methods used to calculate the baseline value of redox potential discontinuity (RPD) depth in sediment.

**Review/Revision History:** Original author: SY Liang  
WSL: Does not need revision for AMP mod 2  
12/30/11 WSLReformatted, added signature block.

**Software/Connections/Permissions Required:** N/A

Param_code	Thresh old ID	Testing area	Caution Level (cm)	Warning Level (cm)	Baseline Years	Baseline Method
AVG_RPD	SRPD	Nearfield	1.18	-	1992-2000 (data available only in 1992, 1995, 1997, 1998 through 2000)	Arithmetic mean

Table 1: Sediment RPD Thresholds.

Data Source (Data from EM&MS database):

- Apparent RPD data are obtained from the SED\_PROF\_PARAM and SED\_PROF\_IMAGE table.
- Nearfield stations are specified as station IDs beginning with 'N', plus stations FF10, FF12, and FF13.
- There is one survey event each year. All events were conducted in August, except that the event S9702 in 1997 was done in August and October.

Data To Be Used In The Analysis:

- Baseline calculations and threshold testing are performed on all nearfield.
- All RPD data from all baseline years are included. Exceptions are specified in the following:

3. Data qualified as suspect/invalid (VAL\_QUAL contains 's'), investigation pending (VAL\_QUAL contains 'q'), and (VAL\_QUAL contains 'e') are not used. There are no 's' or 'q' qualified data in the current data set.
4. For data qualified as above maximum detection limit (VAL\_QUAL='A'), the prism penetration value (PARAM\_CODE='AVG\_PEN') is used as a surrogate for RPD value.

Data Aggregation:

- All RPD measurements within a station are treated as independent measurements so there is no data aggregation within station. This is consistent with how the faunal data are analyzed and thresholds calculated.
- The yearly mean is calculated using all nearfield measurements from each year.

Baseline Calculation:

- The average of the six yearly means is the baseline mean.
- Caution threshold is  $0.5 \times$  baseline mean.

Threshold Testing:

- For each post-discharge year, the annual average is compared against the caution threshold in table 1. If the annual average is smaller than the threshold, there is an exceedance for that year.

Marine Data Program Manager:	<hr/> Wendy Leo Date
MWRA Scientist Responsible for sediment RPD threshold	<hr/> Kenneth Keay Date

## **APPENDIX B**

### **Data Forms**

**Normandeau  
Cove Corporation  
Diaz & Daughters  
Barbara Hecker/Hecker Environmental**

<b>MWRA Benthic Monitoring Survey Log</b>						
<b>Date:</b>		<b>Depart time:</b>		<b>Return time:</b>		
<b>Vessel:</b>			<b>Chief Scientist:</b>			
<b>Crew:</b>						
<b>Navigation method (circle):</b> GPS with high-gain 10 Hz receiver/Other (describe)			<b>Navigation accuracy (circle):</b> ±10m/±30m			
Survey Type (check)			Weather (check)			
Outfall Hard-bottom ROV		Clear		Drizzle		
Outfall Soft-bottom SPI		Partly cloudy		Rain		
Outfall Soft-bottom benthic grab		Cloudy		Thunderstorm		
Harbor Soft-bottom SPI		Overcast				
Harbor Soft-bottom benthic grab		Fog				
<b>Marine Mammal Observations:</b>			Sea State (check)			
			Calm		Rough	
			Choppy		Swell height:	
<b>Comments:</b>						
<b>QA/QC:</b>		<b>Chief Scientist</b> - initial in QA/QC box to verify that checks were made prior to leaving each station to ensure that all required samples and data were collected; and that entries on Station Logs and sample labels were checked for accuracy and legibility.				

## Quality Control Log: Sort

**Project**

**Name:** \_\_\_\_\_

**Code:** \_\_\_\_\_

**Year:** \_\_\_\_\_

**Sorter:** \_\_\_\_\_

Sample No.	Qc'er		Counts			Results		Comments
	Name	Date	Orig	QC	Total	% Diff	P/F	

**Quality Control Log: Identification**

**Project**

**Name:** \_\_\_\_\_

**Code:** \_\_\_\_\_

**Year:** \_\_\_\_\_

**Taxonomist:** \_\_\_\_\_

Sample No.	Ident Date	Qc'er		Results		Comments
		Name	Date	% Diff	P/F	



**Data Form – QC SAMPLE REIDENTIFICATION SHEET**

Project \_\_\_\_\_

Collection Date \_\_\_\_\_

Station \_\_\_\_\_

Original Processor \_\_\_\_\_

Taxon	QC Recount	Original Count	Taxon	QC Recount	Original Recount
			<b>Total Counts</b>		

No. of Miscounts ( - |Recount – original count|) \_\_\_\_\_

No. of Misidentifications \_\_\_\_\_

Total No. of Errors \_\_\_\_\_

$$\% \text{ Error} = \frac{\text{Total No. Original Inds.} - \text{Total No. Errors}}{\text{Total No. Inds.}}$$

QC'd by \_\_\_\_\_

Date \_\_\_\_\_

Other problems with Sample:

Individual placed in wrong vial \_\_\_\_\_

Counts records on wrong line \_\_\_\_\_

Inadequate labels \_\_\_\_\_

Other \_\_\_\_\_

**Cove Corporation Sorting QC Sheet**

Page \_\_\_ of \_\_\_

<b>Client:</b> MWRA (HOM5 Project)	<b>Study Site:</b>	<b>Sampling Date:</b>
<b>QC Sample:</b>	<b>Lab. Serial No.:</b>	<b>Sample Id.:</b>
<b>Sorter:</b>		<b>Batch No.:</b>

**I. Number of Organisms Found in QC Inspection**

<b>Taxon</b>	<b>Count</b>	<b>Taxon</b>	<b>Count</b>

**II. Evaluation of QC Sample**

Total number of organisms present in sample:	Total number of organisms found in QC audit:
Percent error calculation:	Pass <input type="checkbox"/> Fail <input type="checkbox"/>
Date & initials of sorter performing the QC resort:	
Date & initials of taxonomist recording the number of organisms missed:	
Has this batch previously failed a QC check? Yes <input type="checkbox"/> No <input type="checkbox"/>	
Was the sample residue properly labeled with internal and external labels? Yes <input type="checkbox"/> No <input type="checkbox"/>	
Were all specimen vials of the QC sample properly labeled? Yes <input type="checkbox"/> No <input type="checkbox"/>	

Cove Corporation  
**Sample Batch Listing Sheet**

Page \_\_\_ of \_\_\_

<b>Client &amp; Project Name:</b> MWRA (HOM5 Project)	<b>Study Site:</b>
<b>Taxonomist:</b>	<b>Sampling Date:</b>

**I. BATCHES OF SAMPLES**

Batch No.	Batch No.	Batch No.	Batch No.
1)	1)	1)	1)
2)	2)	2)	2)
3)	3)	3)	3)
4)	4)	4)	4)
5)	5)	5)	5)
6)	6)	6)	6)
7)	7)	7)	7)
8)	8)	8)	8)
9)	9)	9)	9)
10)	10)	10)	10)

**II. QC EVALUATION**

QC Results	Batch No.	Batch No.	Batch No.	Batch No.
QC Sample				
Serial No.				
QC Date				
QC Inspector				
Percent Error				

**III. COMMENTS CONCERNING SAMPLE PROCESSING**

(initialize & date all entries -- continue on back if necessary)

Necessary Remedial Action:
Comments:

**Chain of Custody Record**

Page \_\_\_ of \_\_\_

Cove Corporation, 10200 Breeden Road, Lusby, MD 20657  
 TEL 410-326-4577, FAX 410-326-4767

<b>Client &amp; Project Name:</b> MWRA (HOM5 Project)	<b>Destination:</b>
<b>Study Site &amp; Sampling Date:</b>	
<b>Project Description:</b> macrobenthic sample processing	

Rep.	No. of Vials	Serial No.	Survey Date	Sta. – Rep.	No. of Vials	Serial No.	Survey Date

**Total Number of Samples**

Relinquished by (Signature)	Date	Method of Shipment	Received By (Signature)	Date	Method of Shipment
Relinquished by (Signature)	Date	Method of Shipment	Received By (Signature)	Date	Method of Shipment



**Cove Corporation Identification QC Sheet**

Page \_\_\_ of \_\_\_

<b>Client:</b> MWRA (HOM5 Project)	<b>Study Site:</b>	<b>Sampling Date:</b>
<b>QC Sample:</b>	<b>Lab. Serial No.:</b>	<b>Sample Id.:</b>
<b>Taxonomist:</b>		<b>Batch No.:</b>

**I. TYPE I ERRORS (taxa incorrectly enumerated)**

Taxon	QC Count	Original Count	Taxon	QC Count	Original Count
<b>Total number of enumeration errors</b>					

**II. TYPE II ERRORS (taxa incorrectly identified)**

**III. TYPE III ERRORS (taxa not recorded or recorded on the wrong line of the data sheet)**

Taxon	Number	Taxon	Number
<b>Total number of recording errors</b>			

**IV. EVALUATION OF QC SAMPLE**

Total number of organisms present in sample:	Total number of errors detected in QC audit:
Identification QC error:	Pass <input type="checkbox"/> Fail <input type="checkbox"/>
Reidentified by:	Date Reidentified:
Necessary Remedial Action:	
Comments:	

		PEN.	PEN.	PEN.	Sur		RPD	RPD	RPD		MAX	SURFACE	AMPHIPOD	WORM
STATION	Rep	Min	Max	ave	Rel	Qual	Max	Qual	ave	GRAIN SIZE	GRAIN SIZE	FEATURES	TUBES	TUBES

Client \_\_\_\_\_  
Project Name \_\_\_\_\_

Study Site \_\_\_\_\_  
Sampling Date \_\_\_\_\_

		SURFACE FAUNA	SUB. FAUNA		OXIC	ANAEROBIC	GAS	SUCC.			
STATION	Rep	OTHER	WORMS	BURROWS	VOIDS	VOIDS	VOIDS	STAGE		OSI	REMARKS

Normandeau Associates, Inc.  
QAPP Benthic Monitoring 2017-2020  
MWRA Contract No. OP326B

Appendix B  
May 2017  
Page B-11 of 12



**Hecker Environmental Data Record Form—Record of ROV HD-Video pauses *in lieu of* still camera frames.**

Station: T - WP		Date:	Comment:
ROV Pause #	Time	Depth (ft)	Comments
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			

## **APPENDIX C**

### **Cove Corporation Processing and Quality Control Procedures**

Cove Corporation  
10200 Breeden Rd  
Lusby, MD 20657

May 27, 2014

To: Mr. Eric Nester  
Normandeau Associates

From: Nancy K. Mountford

Regarding: MWRA QAPP

The Cove Corporation "Description of Macrobenthic Sample Processing and Quality Control Procedures" provides additional details on infaunal sample analysis methods that are not specified elsewhere in the MWRA "Quality Assurance Project Plan for Benthic Monitoring 2014–2017" (QAPP).

These are Cove's general processing procedures, which are modified as necessary to meet project-specific requirements. For any case in which Cove's general procedures are different from those described in the body of the QAPP, the procedures described in the QAPP will be followed. An example of this is that Cove's general procedures describe sample processing using a 0.5 mm sieve. MWRA's processing protocols require the use of a 0.3 mm sieve. Cove Corporation will use the 0.3 mm sieve for processing all MWRA samples.

Sincerely,



Nancy K. Mountford

President

# COVE CORPORATION

(SPECIALISTS AT MACROBENTHIC SAMPLE PROCESSING)

## Description of Macrobenthic Sample Processing and Quality Control Procedures

Prepared by

Nancy K. Mountford  
C. Timothy Morris  
Cove Corporation  
10200 Breeden Road  
Lusby, MD 20657

Last Revision: May 30, 2008

## TABLE OF CONTENTS

1.0	Macrobenthic Sample Processing Procedures .....	3
1.1	Sample Inventory and Storage .....	3
1.2	Sample Sorting.....	3
1.3	Sample Identification and Enumeration.....	4
1.4	Sample Biomassing.....	5
2.0	Quality Control Procedures.....	6
2.1	Sorting Quality Control.....	6
2.1.1	Sorting Quality Control of Experienced Technicians .....	6
2.1.2	Sorting Quality Control of Newly Hired Technicians .....	7
2.1.3	Sorting Quality Control of Low Abundance Samples .....	7
2.2	Identification and Enumeration Quality Control .....	8
2.3	Biomassing Quality Control .....	8
3.0	Data Management .....	10
3.1	Data Documentation and Data Entry .....	10
3.2	Quality Control of Data Entry.....	10

## **1.0 MACROBENTHIC SAMPLE PROCESSING PROCEDURES**

This section describes macrobenthic sample processing procedures at Cove Corporation. This section is divided into four parts: (1) sample inventory and storage, (2) sample sorting, (3) sample identification and enumeration, and (4) sample biomassing. These laboratory procedures are designed to produce high quality data. It should also be noted that these laboratory procedures are based upon currently accepted practices in marine benthic ecology.

### **1.1 Sample Inventory and Storage**

Sample processing begins with the reception of macrobenthic samples from the contractor. Upon receipt, each sample will be given a unique serial number so that the location and status of sample processing can be tracked at all times. All sample identification information (e.g., station code, replicate number, sample serial number, location of study site, date of collection, number and size of containers used for each sample, etc.) will be recorded into a computerized sample log book. Samples will also be checked against a master list of samples supplied by the contractor to be sure that they are properly labeled. In addition, the samples will be checked to assure that they are adequately preserved. The contractor will be immediately notified of any sample labeling or preservation problems.

Samples will be stored in storage shed where they will be protected from environmental extremes (i.e., they will be maintained at temperatures between 5° and 30°C). Stored samples will be periodically checked to be sure that an excessive amount of preservative has not evaporated from any of the samples.

During laboratory processing, samples will not be maintained in water for more than 48 hours. If sample sorting has not been completed within 48 hours, the sample will be re-preserved in an 80% ethanol solution for a period of 12 hours. This precaution will minimize microbial decomposition that could affect macroinvertebrate biomass measurements.

### **1.2 Sample Sorting**

The first step of sample sorting is to initiate the sample tracking process. This process assures that the sample has been properly identified by cross referencing the outside sample label information with the sample serial number and station/replicate identification code that is listed in the sample log book.

The second step of sample sorting is to re-sieve the samples using a 0.5 mm sieve. The purpose of this step is to remove the preservative and fine sedimentary particles. Prior to re-sieving, sieves will be cleaned and back washed to prevent cross contamination of samples. Under a fume hood, the preservation fluid from the sample will be poured through a 0.5 mm sieve. The filtrate (i.e., preservation fluid) will be saved to re-preserve the sample residue once sorting is completed. The remaining portion of the sample in the sample container will be rinsed into the sieve using tap water. The sieve containing the sample will be placed in a washbasin and the basin will be partially filled with water. The sieve will be gently agitated to remove fine sedimentary particles from the sample. A gentle spray of water may also be used to help break up consolidated portions of the sample, but direct heavy jets of water will not be used. This washing procedure minimizes mechanical damage to soft-bodied organisms. After the washing procedure has been completed, the sample will be transferred into a labeled container in preparation for sorting. Sieves will be examined after the transfer to ensure that no organisms are entangled in the mesh.

The third step of sample sorting is to remove organisms from the samples. The objective of this step is to remove all organisms of interest from the sample matrix. The organisms of interest are macrobenthic invertebrates usually defined as those organisms retained on a 0.5 mm sieve. All macrofauna and significant body fragments will be removed from each sample. Meiofauna (e.g., harpacticoid copepods, nematodes, ostracods, etc.) and pelagic organisms (e.g., calanoid copepods, chaetognaths, jellyfish, etc.) will not be removed from the samples.

Sorting commences by pouring the sieved sample into white enamel or plastic trays for the initial removal of large size macroinvertebrates. Finer material will be transferred to a petri dish marked with grid lines for sorting using a dissecting microscope. Samples must be evenly distributed over the tray or dish and the water level must be low enough to prevent back and forth sloshing as the tray or dish is moved during sorting. Organisms will be sorted into screw-top vials and preserved in an 80% ethanol solution. Vials will be generated for the following categories: (1) annelids, (2) arthropods, (3) bivalves, (4) gastropods, (5) echinoderms, and (6) miscellaneous taxa. All vials will be labeled internally with the following information: (1) taxonomic category, (2) station code, (3) replicate number, (4) sample serial number, (5) study site, and (6) collection date. All vials from each sample will be bound together with rubber bands and stored in the specimen storage closet. In addition, the sorter will document the following information in the sample log book: (1) number of specimen vials generated for the sample, (2) date and time when sample sorting was completed, and (3) initials of the sorter who sorted the sample. The sample residue that remains after sorting will be transferred back to the sample container and re-preserved in an 80% ethanol solution. A log or batch list of all sorted samples will be kept for each sorter.

### **1.3 Sample Identification and Enumeration**

The objectives of sample identification and enumeration are to accurately identify all organisms found in the sample to the lowest possible level and accurately count the number of individuals of each taxon. Because the identification of macrobenthic invertebrates requires specialized taxonomic training and a familiarity with current taxonomic literature, no single individual will be responsible for identifying all macroinvertebrate groups. Instead, each taxonomist will be responsible for particular groups. When difficult or problematic taxa are encountered, outside taxonomic experts will be consulted to help resolve identifications.

In general, identification of all specimens will be to the species level whenever possible. Nevertheless, certain taxa such as anthozoans, nemertean, oligochaetes, and turbellarians are extremely difficult to identify and no attempt will be made to identify these taxa to a lower level. In addition, it is often not possible to identify juveniles and damaged or incomplete specimens to a species level. However, an attempt will be made to identify such specimens to a generic or family level.

To be counted, a specimen must have a critical part of the body present. For example, polychaetes, gastropods, and arthropods must have the head, bivalves the umbo, and echinoderms must have at least one-half of the central disk present. Specimens lacking these critical parts will be considered fragments and will not be counted.

All identifications will be performed using dissecting and compound microscopes. The sample identification and enumeration processing begins by retrieving a sample from the specimen storage closet. At that time, a species abundance data sheet will be started. The sample serial number, station code, and replicate number marked on the vials will be checked with that recorded on the sample tracking sheet as well as that recorded in the sample log book. In addition, the number of vials for the sample will be checked with that recorded in the sample log book.

Specimens from each vial will be rinsed into separate petri dishes. All vials will be visually inspected to be sure that all organisms have been rinsed from the vials. Each taxon will be identified (usually to the species level), counted, and put into separate vials as specified for each project. All vials will be labeled internally with the following information: (1) taxonomic name, (2) station code, (3) replicate number, (4) and sample serial number. All vials from each sample will be pooled together into a larger sized jar. The jar will be labeled both internally and externally with the following information: (1) station code, (2) replicate number, (3) sample serial number, (4) study site, and (5) collection date. All records on the species abundance or biomass data sheets will be made in waterproof ink. In addition, all entries will be initialized and dated by each taxonomist that performs identifications.

#### **1.4 Sample Biomassing**

Wet weight biomass measurements will be made for each taxon (typically major taxonomic groups) using an analytical balance with an accuracy of 0.1 mg. Biomass measurements will not be made until all specimens in a sample have been identified and have passed all quality control protocols. The balance will be calibrated twice each day using a computerized, internal calibration program. Prior to weighing, each taxon will be placed on absorbent paper toweling to blot dry. In an effort to obtain consistent weights, specimens will be blot-dried for two minutes. However, the time required for blot drying may be less for small, less numerous taxa (e.g., one individual of *Mediomastus ambiseta*). For large bivalves (>20mm), the shell will be opened and the preservation fluid will be drained before weighing.



## 2.0 QUALITY CONTROL PROCEDURES

This section describes Quality Control (QC) procedures for macrobenthic sample processing at Cove Corporation. This section is divided into three parts: (1) sorting quality control, (2) identification and enumeration quality control, and (3) biomass quality control. Cove Corporation's QC program is designed to assure that good laboratory practices are used throughout sample processing and that all macrobenthic samples are processed with a high degree of accuracy.

### 2.1 Sorting Quality Control

This subsection describes QC protocols for sample sorting and is divided into three parts: (1) sorting QC of experienced technicians, (2) sorting QC of newly hired technicians, and (3) sorting QC of low abundance samples.

#### 2.1.1 Sorting Quality Control of Experienced Technicians

At least 10% of the samples sorted by each technician will be checked to detect any unacceptable sorting errors. Only senior technicians will perform the QC evaluations. (A senior technician is defined as having three or more years of sorting experience). Under no circumstances will the same individual who sorted the sample perform the QC evaluation. All samples sorted by each technician will be divided into batches of ten samples and a random selection of one sample from each batch will be checked. In most cases, a batch of samples is defined as ten consecutively sorted samples. By definition, at least 95% of all animals must be removed from a sample to pass the QC evaluation (i.e., the percent sorting error must be  $\leq 5\%$ ). The following formula will be used to calculate the percent sorting error for each QC sample:

$$\frac{\text{Number of animals found in QC inspection}}{\text{Total number of animals present in sample}} \times 100 = \text{percent sorting error}$$

If a sample fails the QC evaluation, all remaining samples from the batch of samples will be resorted. In addition, technicians will be informed of any necessary corrective measures. This procedure will be repeated until the batch of samples passes the QC evaluation. A record of all sorting QC evaluations will be maintained for each technician. Residual material from all completed samples will be returned to the contractor or disposed of as requested.

An initial QC check will be performed when samples from a new geographical region are processed. This initial check will be performed before the regular QC procedure discussed above is implemented. This procedure simply involves checking the first few samples sorted by each technician to detect and correct any unacceptable sorting errors. The purpose of this initial check is to assure that all target animals are being extracted from the samples. This procedure is also considered to be a continuation of laboratory training for experience technicians, since new and/or unusual taxa are often missed when they are encountered for the first time.

#### 2.1.2 Sorting Quality Control of Newly Hired Technicians

Cove Corporation also has a special training program for new technicians. During the first phase of the training program, a senior technician will closely monitor sample sorting. All portions of each sample will be re-sorted by the senior technician to make sure that the new technician is removing all target animals from the sample. Any problems detected by the senior technician will be discussed with

the new technician. This process continues until the senior technician believes that the new technician can sort samples independently. During the second phase of the training program, new technicians sort samples independently. After they complete each sample, a senior technician resorts the sample and a percent sorting error for the sample will be calculated (see formula above). Again, any sorting deficiencies will be discussed with the new technician. New technicians must pass three consecutive QC evaluations before proceeding to the next phase of the training program. During the third and final phase of the training program, new technician sort samples independently in batches of ten samples. After each batch of samples is completed, a senior technician randomly selects and resorts one sample from the batch. If the sample fails the QC evaluation, the corrective measures discussed above will be implemented. If the new technician continually fails sorting QC evaluations, they will be retrained starting at the first phase of the training program.

### **2.1.3 Sorting Quality Control of Low Abundance Samples**

A unique problem arises when samples with a low abundance are chosen for the QC evaluation. To illustrate this point, assume that a sample with 15 organisms was selected for the sorting QC check. There are only two possible outcomes. Either the sample was sorted perfectly (i.e., no organisms were missed) or the sample fails (i.e., even if only one organism was missed, the sorting error would be 6.6%). This example illustrates the inflexibility of using an arbitrary value to determine the pass/fail status of a batch of samples. In other words, the 6.6% sorting error in this example does not indicate that the sorting performance was poor. In fact, just the opposite is true. To this end, Cove Corporation has developed special guidelines governing low abundance samples. First, a low abundance sample is defined as “any sample having fewer than 60 organisms”. Second, any low abundance sample in which three or fewer organisms were missed is considered to pass the sorting QC evaluation even if the percent sorting error is >5%. Third, a special case of a low abundance sample is a sample in which no organisms present. Such samples are excluded from the sorting QC selection process simply because they would automatically pass the QC evaluation (provided that there really are no organisms present in the sample).

## 2.2 Identification and Enumeration Quality Control

In general, the same basic QC principles described in the previous section apply to species identifications. For example, at least 10% of the samples will be checked to detect any unacceptable identification and enumeration errors. Only senior taxonomists will perform the QC check. (A senior taxonomist is defined as having three or more years of taxonomic experience). QC samples will be selected in the same manner as described in the Sorting Quality Control section above. In addition, the same percent accuracy level<sup>1</sup> will be used to determine if a sample passes the QC evaluation and the same corrective measures will be implemented if a sample fails the QC evaluation. The following formula will be used to calculate the percent taxonomy error for each QC sample:

$$\frac{\text{Total number of taxonomy errors}}{\text{Total number of animals present in sample}} \times 100 = \text{percent taxonomy error}$$

Please note that in certain cases it may not be necessary to reprocess the entire batch of samples if only minor corrections are needed (e.g., name changes). When any misidentification is discovered, all previously identified samples containing that taxon will be rechecked. A record of all identification QC evaluations will be maintained. Specimens from all completed samples will be returned to the contractor or stored for a period of one year and then disposed of as requested.

Cove Corporation maintains a specimen reference collection of all identified taxa for each geographical region. The purpose of a reference collection is to assure that identifications throughout the project and among projects are consistent. A positive result of the QC program is the active discussion of taxonomic literature and comparison of species identifications among taxonomist. Thus, the identifications of most taxa as well as reference specimens will be constantly checked throughout sample processing.

## 2.3 Biomassing Quality Control

Many of the QC principles described in Sorting Quality Control section are also used to evaluate biomass measurements. For example, at least 10% of the samples will be checked to detect any unacceptable weighing errors. Only senior technicians will perform the QC check. QC samples will be selected in the same manner and the same corrective measures will be implemented if a sample fails the QC evaluation. However, there are some important differences. First, the definition of a biomass sample is different. A sample is defined as “the weight of one biomass group from a single macrobenthic grab sample”. Please note that biomass groups vary among projects. In some cases, it may compose all individuals of a particular macroinvertebrate group (e.g., annelida, arthropoda, bivalvia, gastropoda, etc.) or it may

---

<sup>1</sup>A strict 95% acceptance/rejection level is not used when a sample with a low abundance is selected for the taxonomy QC evaluation (see section 2.1.3). The same criteria described in section 2.1.3 also apply to taxonomy QC checks.

comprise all individuals of a single macroinvertebrate species (e.g., *Ampelisca abdita*, *Polydora cornuta*, or *Tellina agilis*). Second, the percent accuracy level that will be used to determine if a sample passes the QC evaluation is also different. Wet weight biomass values are difficult to reproduce (i.e., they are imprecise). For this reason, an 80% accuracy level will be used to determine if a sample passes the QC evaluation (i.e., the percent weighing error must be  $\leq 20\%$ ). The following formula will be used to calculate the percent weighing error for each QC sample:

$$\frac{|\text{original weight} - \text{QC weight}|}{\text{QC weight}} \times 100 = \text{percent weighing error}$$

A record of all biomassing QC evaluations will be maintained for each technician.

As with sorting QC samples that possess a low number of individuals, high percent weighing errors can be calculated for QC samples with a low biomass. For this reason, any sample in which the difference between the original and QC measurement is  $\leq 1$  mg is considered to pass the biomass QC evaluation even if the percent weighing error is  $> 20\%$ .

### **3.0 DATA MANAGEMENT**

This section describes how data is recorded and key punched into a computer. This section is divided into two parts: (1) data documentation and data entry and (2) quality control of data entry. Data quality control procedures at Cove Corporation are designed to assure that all data is entered into a computer with a high degree of accuracy.

#### **3.1 Data Documentation and Data Entry**

All data generated during laboratory sample processing will be recorded directly onto abundance and/or biomass data sheets. All data will be recorded in waterproof ink. In addition, all entries will be initialized and dated by the person recording information onto the data sheet. Data sheets will be linked to specific samples using the sample serial numbers that were assigned to each sample during the initial inventory of all macrobenthic samples.

Each macroinvertebrate taxon will be coded with a unique National Oceanographic Data Center (NODC) numerical code. Abundance and/or biomass data will be entered into a desktop computer using a customized data entry program. Electronic computer files of raw macro-benthic data are in an ASCII format, but they can be easily converted into text files or Excel spreadsheets. All abundance and/or biomass data will be reported on a per sample basis.

#### **3.2 Quality Control of Data Entry**

The accuracy of computerized data entry occurs in two phases. First, quality control checks are directly incorporated into the data entry program to assure that all taxa are properly coded and duplicate species entries are prevented. As an additional precaution, each line of data will be printed to the screen so that the scientific name and abundance of each taxon can be checked as data is entered. Second, all printouts of species abundance tables will be manually checked line by line to assure that all taxa are present and the abundance of each taxon has been correctly entered. In other words, 100% of the data will be rechecked for accuracy.

## **APPENDIX D**

### **SPI Parameters**

### **Diaz & Daughters**

**The following paragraphs describe the parameters measured from the sediment profile images.**

*Prism penetration* provides a geotechnical estimate of sediment compaction, with the profile camera prism acting as a dead-weight penetrometer. The farther the prism enters into the sediment, the softer the sediment and likely the higher the water content. Penetration is measured simply as the distance the sediment moves up the 25-cm length of the faceplate. If the weight of the camera frame is not changed during field image collection, the prism penetration provides a means for assessing the relative sediment compaction between stations or different habitat types.

*Surface relief* is measured as the difference between the maximum and minimum distance the prism penetrates. This parameter provides an estimate of small-scale bed roughness, on the order of the prism faceplate width (15 cm). The causes of roughness often can be determined from a visual analysis of the images. In physically dominated sandy habitats, surface relief typically consists of small sand waves or bed forms. In muddy habitats, surface relief is typically irregular (being primarily derived from biological activity of benthic organisms, which form mounds or pits during feeding and burrowing) or smooth. Biological surface roughness can range from small fecal mounds and tubes to large colonies of hydroids or submerged aquatic vegetation (SAV). Surface relief provides qualitative and quantitative data on habitat characteristics, which can be used to evaluate recent and existing habitat quality.

*Apparent color redox potential discontinuity (RPD) layer* is an important estimator of benthic habitat quality. It is the depth to which sediments are oxidized. The term *apparent* is used in describing this parameter because no actual measurement is made of the redox potential. An assumption is made that, given the complexities of iron and sulfate reduction-oxidation chemistry, reddish-brown sediment color tones are indications that the sediments are oxic (oxidized), or at least are not intensely reducing (Diaz and Schaffner 1988). This is in accordance with the classical concept of RPD depth, which associates it with sediment color (Fenchel 1969).

The depth of the apparent color RPD is defined as the area of all the pixels in the image discerned as being oxidized divided by the width of the digitized image. The area of the image with oxic sediment is obtained by digitally manipulating the image to enhance characteristics associated with oxic sediment (greenish-brown color tones). The enhanced area then is determined from a density slice of the image or, if image quality is poor, the area is delineated with the cursor.

The apparent color RPD is very useful in assessing the quality of a habitat for epifauna and infauna from physical and biological perspectives. Rhoads and Germano (1986), Day et al. (1988), and Diaz and Schaffner (1988) found the depth of the RPD from profile images to be directly correlated to the quality of the benthic habitat in polyhaline and mesohaline estuarine zones. Thin RPDs, on the order of a few millimeters, tend to be associated with some environmental stress, whereas areas with deep RPDs, that is, deeper than 3 cm, usually were found to have flourishing epibenthic and infaunal communities.

*Sediment grain size* is a geotechnical feature of the sediments that is used to determine the type of sediments present. The nature of the physical forces acting on a habitat can be inferred from grain-size distribution of the sediments. The sediment type descriptors used follow the Wentworth classification as described in Folk (1974) and represent the major modal class for each layer identified in an image. Sediment grain size is determined by comparing the collected images with a set of standardized images taken of sediments for which mean grain size has been determined by laboratory analyses. Sediment grain sizes ranging from pebble/rock to gravel, to sand, to silt, and clay can be estimated accurately from the images.

*Surface features* include a variety of physical and biological features that can be seen at or on the sediment surface. These can range from submerged aquatic vegetation (SAV), worm tubes, fecal pellets, epibenthic organisms, bacterial mats, algal mats, shells, mud clasts, and bed forms to feeding pits and mounds. Each feature provides information on the type of habitat and its quality. Certain surface features are indicative of the overall nature of a habitat. For example, bedforms are always associated with physically dominated habitats, whereas worm tubes or feeding pits are indicative of a more biologically accommodated habitat (Rhoads and Germano 1986; Diaz and Schaffner 1988). Surface features are visually evaluated from each slide and compiled by type and frequency of occurrence.

*Subsurface features* include a variety of features such as burrows, water-filled voids, SAV rhizomes, infaunal organisms, gas voids, shell debris, detrital layers, and sediment lenses of different grain size. Subsurface features also reveal a great deal about the physical-biological control occurring in a habitat. For example, the presence of gas voids with a mixture of nitrogen and methane from bacterial metabolism (Reineck and Singh 1975) has been found to be an indication of anaerobic metabolism (Rhoads and Germano 1986) and associated with high rates of bacterial activity. Muddy habitats with large amounts of methane gas are generally associated with areas of oxygen stress or high organic loading (Day *et al.*, 1988). On the other hand, habitats with burrows, infaunal feeding voids, and/or visible infauna are generally more biologically accommodated and considered unstressed.

*Successional stages* of the fauna in a habitat can be estimated by using SPI data (Rhoads and Germano 1986). Characteristics that are associated with pioneering or colonizing (Stage I) assemblages (in the sense of Odum 1969), such as dense aggregations of small polychaete tubes at the surface and shallow apparent RPD layers, are easily seen in sediment profile images. Advanced or equilibrium (Stage III) assemblages also have characteristics that are easily seen in profile images, such as deep apparent RPD layers and subsurface feeding voids. Stage II is intermediate to Stages I and III, and has characteristics of both (Rhoads and Germano 1986).

## Literature Cited

- Day ME, LC Schaffner, and RJ Diaz. 1988. Long Island Sound sediment quality survey and analyses. Tetra Tech, Report to the National Oceanic and Atmospheric Administration, NOS, OMA, Rockville, MD. 113 pp.
- Diaz RJ and LC Schaffner. 1988. Comparison of sediment landscapes in the Chesapeake Bay as seen by surface and profile imaging. pp. 222-240. In: M. P. Lynch and E. C. Krome, eds. Understanding the Estuary; Advances in Chesapeake Bay Research. Chesapeake Research Consortium Publication 129 CBP/TRS 24/88.
- Fenchel T. 1969. The ecology of marine microbenthos. IV. Structure and function of the benthic ecosystem, its chemical and physical factors and microfauna communities with special reference to the ciliated Protozoa. *Ophelia* 6:1–182.
- Folk RL. 1974. Petrology of Sedimentary Rocks. Hemphill Publishing Company, Austin, TX. 184 pp.
- Odum EP. 1969. The strategy of ecosystem development. *Science* 164:262–270.
- Reineck E and I.B Singh. 1975. Depositional Sedimentary Environments. Springer-Verlag, New York.
- Rhoads DC and JD Germano. 1986. Interpreting long-term changes in benthic community structure: a new protocol. *Hydrobiologia* 142:291–308.



## **APPENDIX E**

### **Specifications for Data Sets**

**a. Infaunal Survey data: Harbor, Nearfield, and Farfield**

**Survey event: soft-bottom benthic, Harbor, Nearfield, and Farfield (SB\_EVENT)**

Description	Field	Required Field	Data type & format
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Name of the event.	EVENT_NAME	Y	alphanumeric, maximum 100 characters
Platform name (e.g., vessel name).	PLAT_NAME	Y	alphanumeric, maximum 20 characters
Name of the scientist in charge of the event.	CHIEF_SCIENTIST	Y	alphanumeric, maximum 20 characters
Comments on survey event, detailing any exceptions from standard procedures	COMMENTS		alphanumeric, maximum 150 characters

**Benthic station: soft-bottom, Harbor, Nearfield, and Farfield (SB\_STATION)**

Description	Field	Required Field	Data type & format
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	date
Beginning latitude measured at each station visit (decimal degrees)	BEG_LATITUDE	Y	number (7 decimal places)
Beginning longitude measured at each station visit (decimal degrees)	BEG_LONGITUDE	Y	number (7 decimal places)
Ending latitude measured at each station visit (decimal degrees)	END_LATITUDE		number (7 decimal places)
Ending longitude measured at each station visit (decimal degrees)	END_LONGITUDE		number (7 decimal places)
How station location was determined (e.g, LORAN-C, line of sight, survey map, etc.).	NAVIGATION_CODE	Y	alphanumeric, maximum 20 characters
Estimated accuracy of navigation in meters.	NAV_QUAL	Y	alphanumeric, maximum 10 characters
Depth to bottom in meters	DEPTH_TO_BOTTOM	Y	number (2 decimal places)
Comments detailing any exceptions from standard procedures on this station visit	COMMENTS		alphanumeric, maximum 150 characters

**Soft-bottom benthic sample, Harbor, Nearfield, and Farfield (SB\_SAMPLE)**

Description	Field	Required Field	Data type & format
Identifier of sampling event. (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	date
Sample identifier	SAMPLE_ID	Y	alphanumeric, maximum 16 characters
Code for type of gear used to collect sample	GEAR_CODE	Y	alphanumeric, maximum 12 characters
Depth of sediment sample, from sediment surface to bottom of sample, in cm	DEPTH	Y	number (2 decimal places)
Date and time sample was taken (local time)	SAMPLE_DATE_TIME_LOCAL		date
Precise latitude recorded when sample was collected.	LATITUDE	Y	number (7 decimal places)
Precise longitude recorded when sample was collected.	LONGITUDE	Y	number (7 decimal places)
Volume of sample as collected.	SAMP_VOL		floating point
Unit of volume measurement.	SAMP_VOL_UNIT_CODE		alphanumeric, maximum 3 characters
Comments for this sample	COMMENTS		alphanumeric, maximum 150 characters
Comments for the exact sample location	LOC_COMMENTS		alphanumeric, maximum 150 characters

**Soft-bottom benthic chemistry subsample, Harbor, Nearfield, and Farfield (SB\_BOTTLE\_CH)**

Description	Field	Required Field	Data type & format
Identifier of sampling event. (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Sample identifier	SAMPLE_ID	Y	alphanumeric, maximum 16 characters
Subsample (bottle) identifier (= MWRA DLS sample number)	BOTTLE_ID	Y	alphanumeric, maximum 17 characters
Comments for a given bottle	COMMENTS		alphanumeric, maximum 150 characters

**b. Infaunal measurement data: Harbor, Nearfield, and Farfield**

**Soft-bottom benthic infaunal subsample, Harbor, Nearfield, and Farfield (SB\_BOTTLE)**

Description	Field	Required Field	Data type & format
Identifier of sampling event. (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Sample identifier	SAMPLE_ID	Y	alphanumeric, maximum 16 characters
Subsample (bottle) identifier	BOTTLE_ID	Y	alphanumeric, maximum 17 characters
Comments for a given bottle	COMMENTS		alphanumeric, maximum 150 characters

**Benthic infaunal abundance, Harbor, Nearfield, and Farfield (SB\_INFAUNA)**

Description	Field	Required Field	Data type & format
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for sample.	SAMPLE_ID	Y	alphanumeric, maximum 16 characters
Identifier for sub-sample bottle (generally corresponds to number on label).	BOTTLE_ID	Y	alphanumeric, maximum 17 characters
Code for species being studied.	SPEC_CODE	Y	alphanumeric, maximum 17)
Qualifier for species code (fragment, species, complex, juvenile) Default = 'null'.	SPEC_QUAL	Y	alphanumeric, maximum 4 characters
Count of individuals for that species	VALUE	Y	floating point
Value qualifier.	VAL_QUAL		alphanumeric, maximum 4 characters
Code for the unit of the measurement (0.04 m2)	UNIT_CODE		alphanumeric, maximum 12 characters
Code for the method (ENUM)	METH_CODE		alphanumeric, maximum 13 characters
Code for lab that performed the analysis.	ANAL_LAB_ID		alphanumeric, maximum 4 characters
Number assigned by the laboratory to the sample.	LAB_SAMPLE_ID		alphanumeric, maximum 35 characters
Comments on the record.	COMMENTS		alphanumeric, maximum 150 characters

**c. SPI Survey data: Harbor and Nearfield**

**Survey event: sediment profile imaging, Harbor and Nearfield (SP\_EVENT)**

Description	Field	Required Field	Data type & format
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Name of the event.	EVENT_NAME	Y	alphanumeric, maximum 100 characters
Platform name (e.g., vessel name or drifter serial #).	PLAT_NAME	Y	alphanumeric, maximum 20 characters
Name of the scientist in charge of the event.	CHIEF_SCIENTIST	Y	alphanumeric, maximum 20 characters
Comments on survey event, detailing any exceptions from standard procedures	COMMENTS		alphanumeric, maximum 150 characters

**Station: sediment profile imaging, Harbor and Nearfield (SP\_STATION)**

Description	Field	Required Field	Data type & format
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	date
Beginning latitude measured at each station visit (decimal degrees)	BEG_LATITUDE	Y	number (7 decimal places)
Beginning longitude measured at each station visit (decimal degrees)	BEG_LONGITUDE	Y	number (7 decimal places)
Ending latitude measured at each station visit (decimal degrees)	END_LATITUDE		number (7 decimal places)
Ending longitude measured at each station visit (decimal degrees)	END_LONGITUDE		number (7 decimal places)
How station location was determined (e.g, LORAN-C, line of sight, survey map, etc.).	NAVIGATION_CODE	Y	alphanumeric, maximum 20 characters
Estimated accuracy of navigation in meters.	NAV_QUAL	Y	alphanumeric, maximum 10 characters
Depth to bottom in meters	DEPTH_TO_BOTTOM	Y	number (2 decimal places)
Comments detailing any exceptions from standard procedures on this station visit	COMMENTS		alphanumeric, maximum 150 characters

**d. SPI measurement data: Harbor and Nearfield**

**Sediment profile image: whole-image information, Harbor and Nearfield (SP\_IMAGE)**

Description	Field	Required Field	Data type & format
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	date
Date and time of this image; unique to this frame (local time).	IMAGE_DATE_TIME_LOCAL	Y	date
Replicate frame number within this camera-drop.	FRAME_NO		integer (max 9999)
Camera penetration depth in cm.	CAMERA_PENET_DEPTH		number (2 decimal places)
Code for type of gear used to collect image.	GEAR_CODE		alphanumeric, maximum 12 characters
Comments for a given camera drop/image	COMMENTS		alphanumeric, maximum 150 characters

**Sediment profile image: measurements, Harbor and Nearfield (SP\_PARAM)**

Description	Field	Required Field	Data type & format
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	date
Date and time of this image; unique to this frame (local time)	IMAGE_DATE_TIME_LOCAL	Y	date
Depth (cm) within image of measurement (null if whole image)	DEPTH_IN_SED		number (2 decimal places)
Code for parameter measured.	PARAM_CODE	Y	alphanumeric, maximum 20 characters
Result for parameter. Note character data type.	VALUE		alphanumeric, maximum 22 characters
Value qualifier.	VAL_QUAL		alphanumeric, maximum 4 characters
Code for units of measurement.	UNIT_CODE		alphanumeric, maximum 12 characters
Code for method used for analysis.	METH_CODE		alphanumeric, maximum 13 characters
Comments on this measurement.	COMMENTS		alphanumeric, maximum 150 characters

**e. Hard-bottom survey data**

**Survey event: hard-bottom (HB\_EVENT)**

Description	Field	Required Field	Data type & format
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Name of the event.	EVENT_NAME	Y	alphanumeric, maximum 100 characters
Platform name (e.g., vessel name or drifter serial #).	PLAT_NAME	Y	alphanumeric, maximum 20 characters
Name of the scientist in charge of the event.	CHIEF_SCIENTIST	Y	alphanumeric, maximum 20 characters
Comments on survey event, detailing any exceptions from standard procedures	COMMENTS		alphanumeric, maximum 150 characters

**Benthic station: hard-bottom (HB\_STATION)**

Description	Field	Required Field	Data type & format
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	date
Beginning latitude measured at each station visit (decimal degrees)	BEG_LATITUDE	Y	number (7 decimal places)
Beginning longitude measured at each station visit (decimal degrees)	BEG_LONGITUDE	Y	number (7 decimal places)
Ending latitude measured at each station visit (decimal degrees)	END_LATITUDE		number (7 decimal places)
Ending longitude measured at each station visit (decimal degrees)	END_LONGITUDE		number (7 decimal places)
How station location was determined (e.g, LORAN-C, line of sight, survey map, etc.).	NAVIGATION_CODE	Y	alphanumeric, maximum 20 characters
Estimated accuracy of navigation in meters.	NAV_QUAL	Y	alphanumeric, maximum 10 characters
Depth to bottom in meters	DEPTH_TO_BOTTOM	Y	number (2 decimal places)
Comments detailing any exceptions from standard procedures on this station visit	COMMENTS		alphanumeric, maximum 150 characters

**f. Hard-bottom measurement data**

**Hard-bottom still photo: whole-image information (HB\_STILL)**

<b>Description</b>	<b>Field</b>	<b>Required Field</b>	<b>Data type &amp; format</b>
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	Date
The ordinal number of the excursion made to a station on a given day, marked by a separate stat arriv time	EXCURSION	Y	integer (max 999)
Date and time of this image for this roll_no and frame no. (Local time)	IMAGE_DATE_TIME_LOCAL	Y	date
Number of the roll of film used to capture images of hardbottom conditions.	ROLL_NO	Y	integer ( max 9999)
Frame number within a roll of film	FRAME_NO	Y	alphanumeric, maximum 4 characters
Depth of water in which picture was taken (meters)	DEPTH		number (1 decimal place)
Code describing primary substratum	PRIMARY_SUBS_CODE		alphanumeric, maximum 5 characters
Code describing secondary substratum	SECONDARY_SUBS_CODE		alphanumeric, maximum 5 characters
Code describing sediment drape characteristics	SED_DRAPE_CODE		alphanumeric, maximum 5 characters
Coded comments on this image frame	COMMENT_CODE		alphanumeric, maximum 20 characters



**Hard-bottom still photo: measurements (HB\_STILL\_PARAM)**

<b>Description</b>	<b>Field</b>	<b>Required Field</b>	<b>Data type &amp; format</b>
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	date
Number of the roll of film used to capture images of hardbottom conditions.	ROLL_NO	Y	integer (max 9999)
Frame number within a roll of film	FRAME_NO	Y	alphanumeric, maximum 4 characters
Code for parameter measured.	PARAM_CODE	Y	alphanumeric, maximum 20 characters
Result for parameter with character value. Note character data type.	VALUE_CODE		alphanumeric, maximum 5 characters
Result for parameter with numeric value. Note numeric data type.	VALUE		integer (max 9999)
Value qualifier.	VAL_QUAL		alphanumeric, maximum 5 characters
Comments on this measurement.	COMMENTS		alphanumeric, maximum 150 characters

**Hard-bottom video: whole-clip information (HB\_VIDEO)**

<b>Description</b>	<b>Field</b>	<b>Required Field</b>	<b>Data type &amp; format</b>
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	date
The sequential number for a video clip made at a station at a stat_arriv, and marked by a image_date_time_beg and image_date_time_end	EXCURSION	Y	integer (max 999)
Time of the beginning of this video clip (local time)	IMAGE_DATE_TIME_BEG_LOCAL	Y	date
Time of the end of this video clip (local time)	IMAGE_DATE_TIME_END_LOCAL	Y	date
Number of usable minutes between the image_date_time_beg and image_date_time_end	USABLE_MINUTES	Y	number (1 decimal place)
Depth of water at image_time_beg (meters)	DEPTH_BEG		number (1 decimal place)
Depth of water in at image_time_end (meters)	DEPTH_END		number (1 decimal place)
Code describing primary substrata	PRIMARY_SUBS_CODE		alphanumeric, maximum 9 characters
Code describing relief intensity from low to high	RELIEF_CODE		alphanumeric, maximum 5 characters
Code describing sediment drape characteristics	SED_DRAPE_CODE		alphanumeric, maximum 5 characters
Code describing amount of visible suspended material	SUSP_MATTER_CODE		alphanumeric, maximum 5 characters
Comments on this video clip	COMMENTS		alphanumeric, maximum 150 characters

**Hard-bottom video: measurements (HB\_VIDEO\_PARAM)**

<b>Description</b>	<b>Field</b>	<b>Required Field</b>	<b>Data type &amp; format</b>
Identifier of sampling event (survey)	EVENT_ID	Y	alphanumeric, maximum 10 characters
Identifier for station.	STAT_ID	Y	alphanumeric, maximum 10 characters
Station arrival date and time (local time)	STAT_ARRIV_LOCAL	Y	date
The sequential number for a video clip made at a station at a stat_arriv, and marked by a image_date_time_beg and image_date_time_end	EXCURSION	Y	integer (max 999)
Code for parameter inferred from visual inspection of video.	PARAM_CODE	Y	alphanumeric, maximum 20 characters
Result for parameter. Note character data type.	VALUE		alphanumeric, maximum 5 characters
Value qualifier.	VAL_QUAL		alphanumeric, maximum 5 characters
Comments on this measurement.	COMMENTS		alphanumeric, maximum 150 characters



Massachusetts Water Resources Authority  
Charlestown Navy Yard  
100 First Avenue  
Boston, MA 02129  
(617) 242-6000  
[www.mwra.com](http://www.mwra.com)